





SCHMITT TRIGGERS DUAL GATE/HEX INVERTER

The SN54LS/74LS13 and SN54LS/74LS14 contain logic gates/inverters which accept standard TTL input signals and provide standard TTL output levels. They are capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. Additionally, they have greater noise margin than conventional inverters.


Each circuit contains a Schmitt trigger followed by a Darlington level shifter and a phase splitter driving a TTL totem pole output. The Schmitt trigger uses positive feedback to effectively speed-up slow input transitions, and provide different input threshold voltages for positive and negative-going transitions. This hysteresis between the positive-going and negative-going input thresholds (typically 800 mV) is determined internally by resistor ratios and is essentially insensitive to temperature and supply voltage variations.

LOGIC AND CONNECTION DIAGRAMS

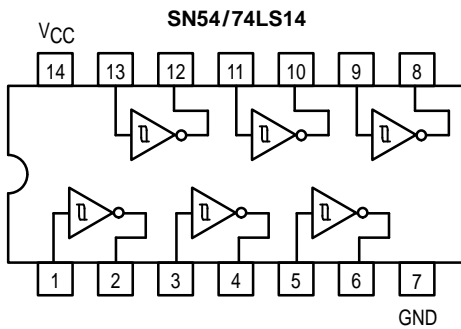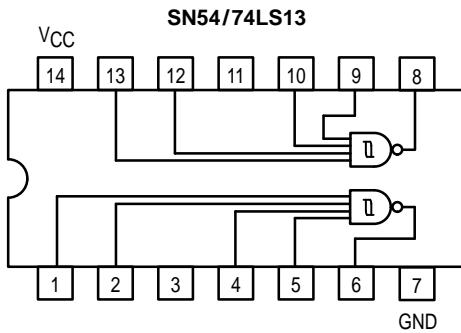


**SN54/74LS13
SN54/74LS14**


**SCHMITT TRIGGERS
DUAL GATE/HEX INVERTER
LOW POWER SCHOTTKY**



**J SUFFIX
CERAMIC
CASE 632-08**



**N SUFFIX
PLASTIC
CASE 646-06**



**D SUFFIX
SOIC
CASE 751A-02**

ORDERING INFORMATION

SN54LSXXJ Ceramic
SN74LSXXN Plastic
SN74LSXXD SOIC

GUARANTEED OPERATING RANGES

| Symbol | Parameter | | Min | Typ | Max | Unit |
|-----------------|-------------------------------------|----------|-------------|------------|-------------|------|
| V _{CC} | Supply Voltage | 54 74 | 4.5 4.75 | 5.0 5.0 | 5.5 5.25 | V |
| T _A | Operating Ambient Temperature Range | 54 74 | -55 0 | 25 25 | 125 70 | °C |
| I _{OH} | Output Current — High | 54, 74 | | | -0.4 | mA |
| I _{OL} | Output Current — Low | 54 74 | | | 4.0 8.0 | mA |

SN54/74LS13 • SN54/74LS14

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

| Symbol | Parameter | Limits | | | Unit | Test Conditions | |
|-------------------|---|--------|-------|------|---------------|--|--|
| | | Min | Typ | Max | | | |
| V_{T+} | Positive-Going Threshold Voltage | 1.5 | | 2.0 | V | $V_{CC} = 5.0\text{ V}$ | |
| V_{T-} | Negative-Going Threshold Voltage | 0.6 | | 1.1 | V | $V_{CC} = 5.0\text{ V}$ | |
| $V_{T+} - V_{T-}$ | Hysteresis | 0.4 | 0.8 | | V | $V_{CC} = 5.0\text{ V}$ | |
| V_{IK} | Input Clamp Diode Voltage | | -0.65 | -1.5 | V | $V_{CC} = \text{MIN}, I_{IN} = -18\text{ mA}$ | |
| V_{OH} | Output HIGH Voltage | 54 | 2.5 | 3.4 | V | $V_{CC} = \text{MIN}, I_{OH} = -400\text{ }\mu\text{A}, V_{IN} = V_{IL}$ | |
| | | 74 | 2.7 | 3.4 | V | | |
| V_{OL} | Output LOW Voltage | 54, 74 | | 0.25 | 0.4 | V | $V_{CC} = \text{MIN}, I_{OL} = 4.0\text{ mA}, V_{IN} = 2.0\text{ V}$ |
| | | 74 | | 0.35 | 0.5 | V | $V_{CC} = \text{MIN}, I_{OL} = 8.0\text{ mA}, V_{IN} = 2.0\text{ V}$ |
| I_{T+} | Input Current at Positive-Going Threshold | | -0.14 | | mA | $V_{CC} = 5.0\text{ V}, V_{IN} = V_{T+}$ | |
| I_{T-} | Input Current at Negative-Going Threshold | | -0.18 | | mA | $V_{CC} = 5.0\text{ V}, V_{IN} = V_{T-}$ | |
| I_{IH} | Input HIGH Current | | 1.0 | 20 | μA | $V_{CC} = \text{MAX}, V_{IN} = 2.7\text{ V}$ | |
| | | | | 0.1 | mA | $V_{CC} = \text{MAX}, V_{IN} = 7.0\text{ V}$ | |
| I_{IL} | Input LOW Current | | | -0.4 | mA | $V_{CC} = \text{MAX}, V_{IN} = 0.4\text{ V}$ | |
| I_{OS} | Short Circuit Current (Note 1) | -20 | | -100 | mA | $V_{CC} = \text{MAX}, V_{OUT} = 0\text{ V}$ | |
| I_{CC} | Power Supply Current | | | | | $V_{CC} = \text{MAX}$ | |
| | Total, Output HIGH | LS13 | 2.9 | 6.0 | mA | | |
| | | LS14 | 8.6 | 16 | | | |
| | Total, Output LOW | LS13 | 4.1 | 7.0 | mA | | |
| | LS14 | 12 | 21 | | | | |

Note 1: Not more than one output should be shorted at a time, nor for more than 1 second.

AC CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

| Symbol | Parameter | Max | | Unit | Test Conditions |
|-----------|------------------------------------|------|------|------|---|
| | | LS13 | LS14 | | |
| t_{PLH} | Propagation Delay, Input to Output | 22 | 22 | ns | $V_{CC} = 5.0\text{ V}$ $C_L = 15\text{ pF}$ |
| t_{PHL} | Propagation Delay, Input to Output | 27 | 22 | ns | |

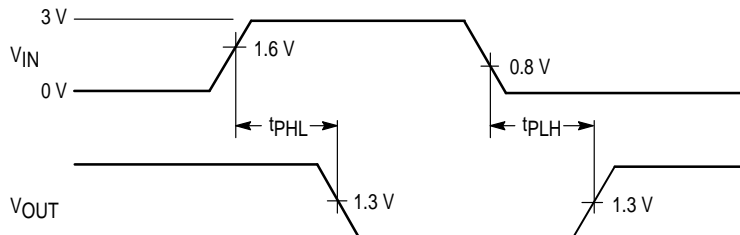


Figure 1. AC Waveforms

SN54/74LS13 • SN54/74LS14

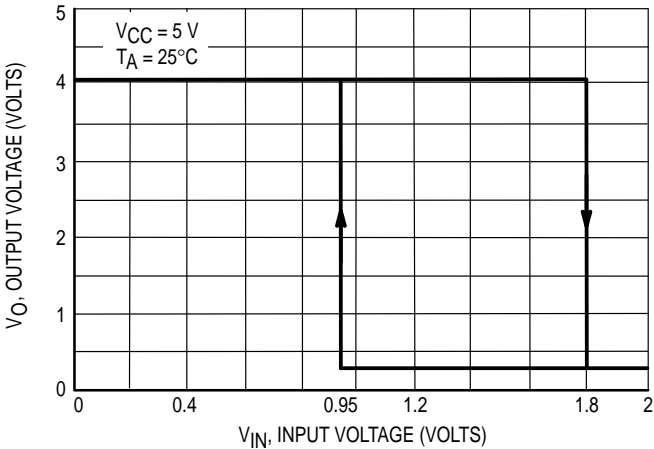


Figure 2. V_{IN} versus V_{OUT} Transfer Function

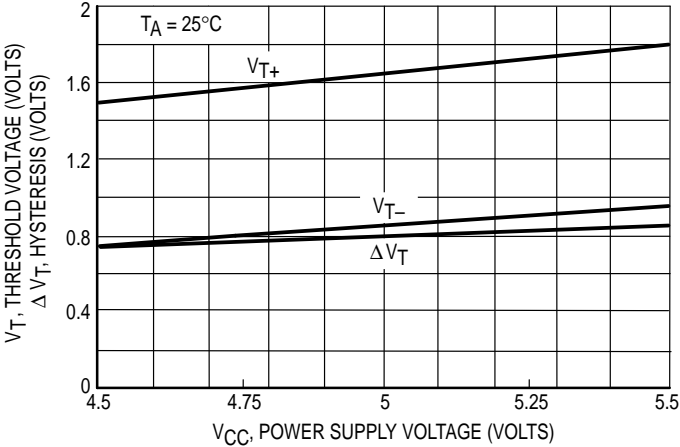


Figure 3. Threshold Voltage and Hysteresis versus Power Supply Voltage

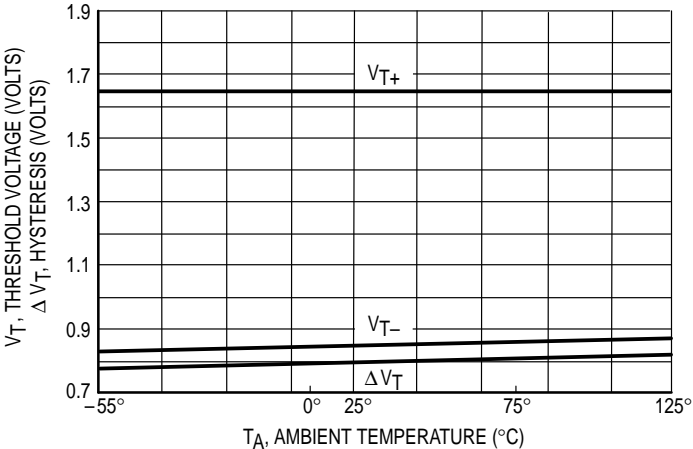


Figure 4. Threshold Voltage Hysteresis versus Temperature