

SPECIFICATIONS

Mechanical

Mating Force: 3.0KG max per 12.7mm of connector

Unmating Force: 0.5KG min per 12.7mm of connector

Durability: 30 Cycles

Electrical

Voltage Rating: 30VAC

Current Rating: Signal 0.5A max per pin

Power 3.0A max per pin

Contact Resistance: 20mΩ max.

Insulation Resistance: 5000MΩ min.

Physical


Housing: LCP UL94V-0, Ivory White

Contact: Copper Alloy


Plating: See "ORDERING INFORMATION"

FOXTOR CONNECTOR

**2T Series,
Receptacle
0.635mm [.025"] Pitch
114 Pos.**

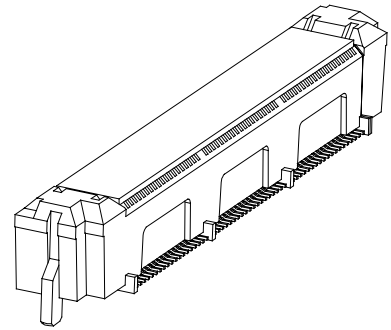

DRAWING

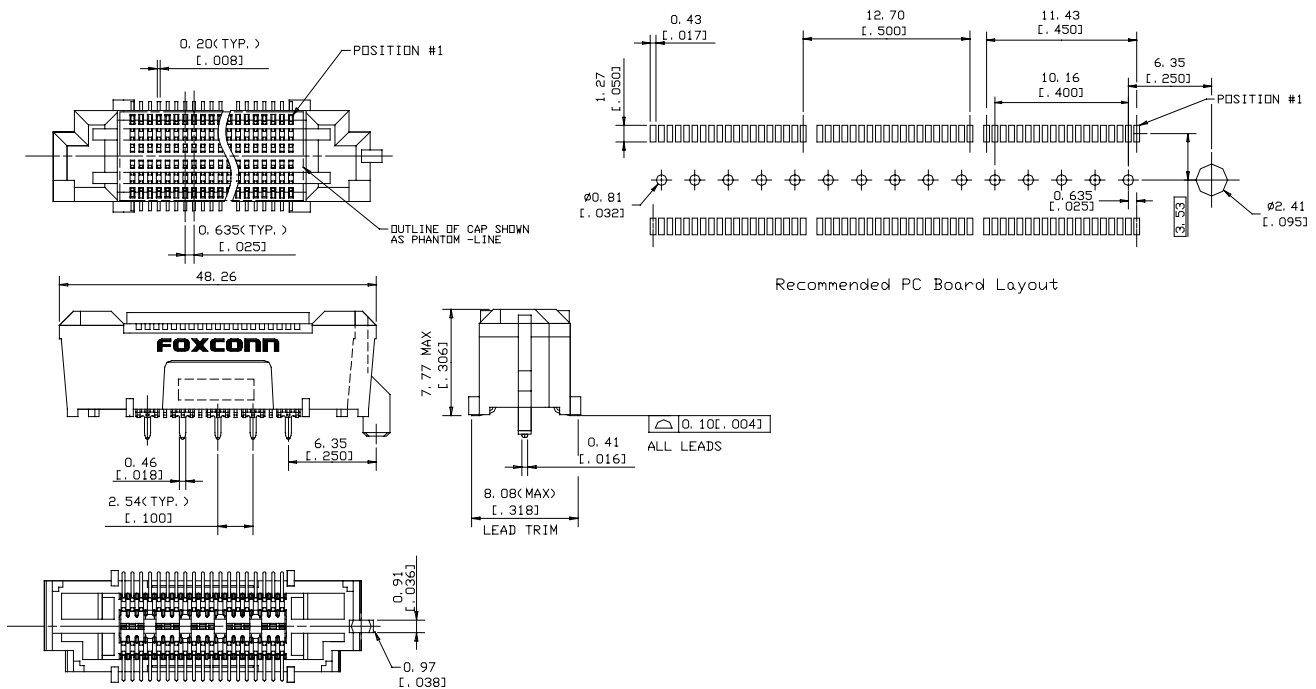

ORDERING INFORMATION

PRODUCT NO: 2 T 6 1 - N N N - 1 1 1 0 - A N

POS. NO.
114: 114POS.

PLATING
1: 1.27 μm GOLD

LEAD-FREE CODE
N: NONE

PACKAGING
A: TUBE