

MMD60R900P

600V 0.9Ω N-channel MOSFET


Description

MMD60R900P is power MOSFET using magnachip's advanced super junction technology that can realize very low on-resistance and gate charge. It will provide much high efficiency by using optimized charge coupling technology. These user friendly devices give an advantage of Low EMI to designers as well as low switching loss.

■ Key Parameters

Parameter	Value	Unit
$V_{DS} @ T_{j,max}$	650	V
$R_{DS(on),max}$	0.9	Ω
$V_{TH,typ}$	3	V
I _D	4.5	А
Q_g,typ	12.3	nC

■ Package & Internal Circuit



Features

- Low Power Loss by High Speed Switching and Low On-Resistance
- 100% Avalanche Tested
- Green Package Pb Free Plating, Halogen Free

Applications

- PFC Power Supply Stages
- Switching Applications
- Adapter
- Motor Control
- DC DC Converters

■ Ordering Information

Order Code	Marking	Temp. Range	Package	Packing	RoHS Status
MMD60R900PRH	60R900P	-55 ~ 150℃	TO-252 (DPAK)	Reel & Tube	Halogen Free



Parameter	Symbol	Rating	Unit	Note
Drain – Source voltage	V _{DSS}	600	V	
Gate – Source voltage	V_{GSS}	±30	V	
Continuous dusin surment	1	4.5	Α	T _C =25 ℃
Continuous drain current	l _D	2.7	Α	T _C =100℃
Pulsed drain current ⁽¹⁾	I _{DM}	13.5	Α	
Power dissipation	P _D	38	W	
Single - pulse avalanche energy	E _{AS}	46	mJ	
MOSFET dv/dt ruggedness	dv/dt	50	V/ns	
Diode dv/dt ruggedness	dv/dt	15	V/ns	
Storage temperature	T_{stg}	-55 ~150	${\mathbb C}$	
Maximum operating junction temperature	T _j	150	$^{\circ}\mathbb{C}$	

¹⁾ Pulse width t_P limited by T_{i,max}

■ Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal resistance, junction-case max	R _{thjc}	3.25	°C/W
Thermal resistance, junction-ambient max	R _{thja}	62.5	°C/W

²⁾ $I_{SD} \leq I_{D}, V_{DS peak} \leq V_{(BR)DSS}$



■ Static Characteristics ($T_c=25$ $^{\circ}$ C unless otherwise specified)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Drain – Source Breakdown voltage	V _{(BR)DSS}	600	-	-	V	$V_{GS} = 0V$, $I_D=0.25$ mA
Gate Threshold Voltage	$V_{GS(th)}$	2	3	4	٧	$V_{DS} = V_{GS}$, $I_D=0.25$ mA
Zero Gate Voltage Drain Current	I _{DSS}	-	-	1	μΑ	$V_{DS} = 600V, V_{GS} = 0V$
Gate Leakage Current	I _{GSS}	-	-	100	nA	$V_{GS} = \pm 30V$, $V_{DS} = 0V$
Drain-Source On State Resistance	R _{DS(ON)}	-	0.81	0.9	Ω	$V_{GS} = 10V, I_D = 1.5A$

■ Dynamic Characteristics ($T_c=25\,^{\circ}\mathbb{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Input Capacitance	C _{iss}	-	396	-		$V_{DS} = 25V, V_{GS} = 0V,$ f = 1.0MHz
Output Capacitance	C _{oss}	-	306	-	~ F	
Reverse Transfer Capacitance	C _{rss}	-	19	-	pF	
Effective Output Capacitance Energy Related (3)	C _{o(er)}	-	17	-		$V_{DS} = 0V \text{ to } 480V, V_{GS} = 0V,f = 1.0MHz$
Turn On Delay Time	t _{d(on)}	-	15	-	ns	$V_{GS} = 10V, R_G = 25\Omega,$ $V_{DS} = 300V, I_D = 4.5A$
Rise Time	t _r	-	29	-		
Turn Off Delay Time	t _{d(off)}	-	151	-		
Fall Time	t _f	-	34	-		
Total Gate Charge	Q_g	-	12.3	-		
Gate – Source Charge	Q_{gs}	-	2.3	-	nC	$V_{GS} = 10V, V_{DS} = 480V$ $I_{D} = 4.5A$
Gate – Drain Charge	Q_gd	-	6	-		
Gate Resistance	R_{G}	-	4.7	-	Ω	$V_{GS} = 0V$, $f = 1.0MHz$

³⁾ $C_{\text{O(er)}}$ is a capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0V to 80% $V_{(BR)DSS}$

Jul. 2013 Revision 1.0 3 MagnaChip Semiconductor Ltd.




■ Reverse Diode Characteristics (T_c =25 $^{\circ}$ C unless otherwise specified)


Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Continuous Diode Forward Current	I _{SD}	-	-	4.5	Α	
Diode Forward Voltage	V_{SD}	ı	ı	1.4	٧	I _{SD} = 4.5 A, VGS = 0 V
Reverse Recovery Time	t _{rr}	-	232	1	ns	450
Reverse Recovery Charge	Q_{rr}	-	1.4	-	μC	I _{SD} = 4.5 A di/dt = 100 A/μs V _{DD} = 100 V
Reverse Recovery Current	I _{rrm}	-	12.4	-	А	V _{DD} = 100 V



■ Characteristic Graph

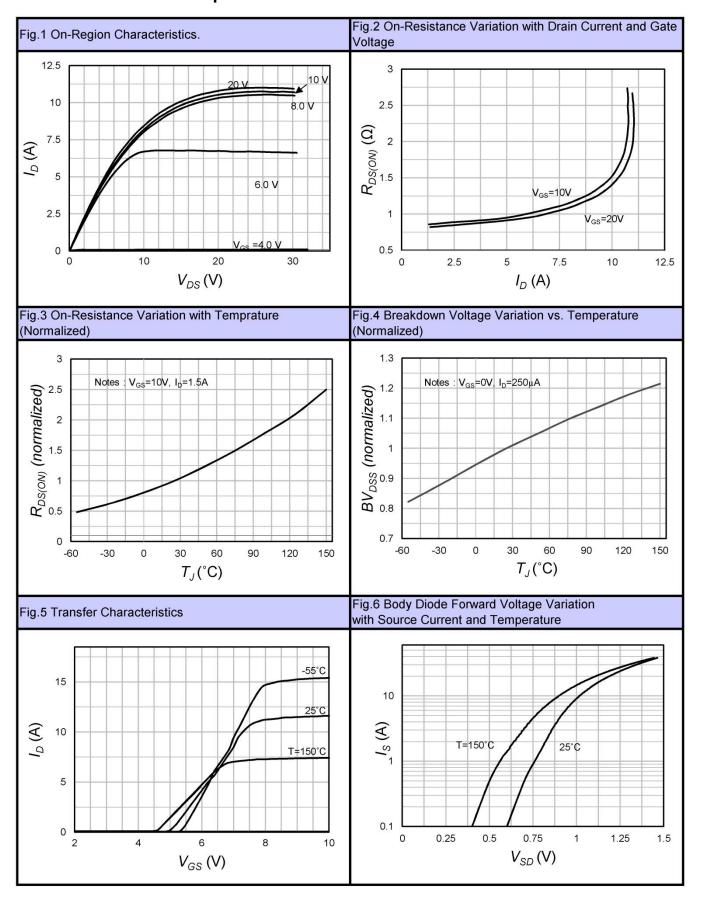




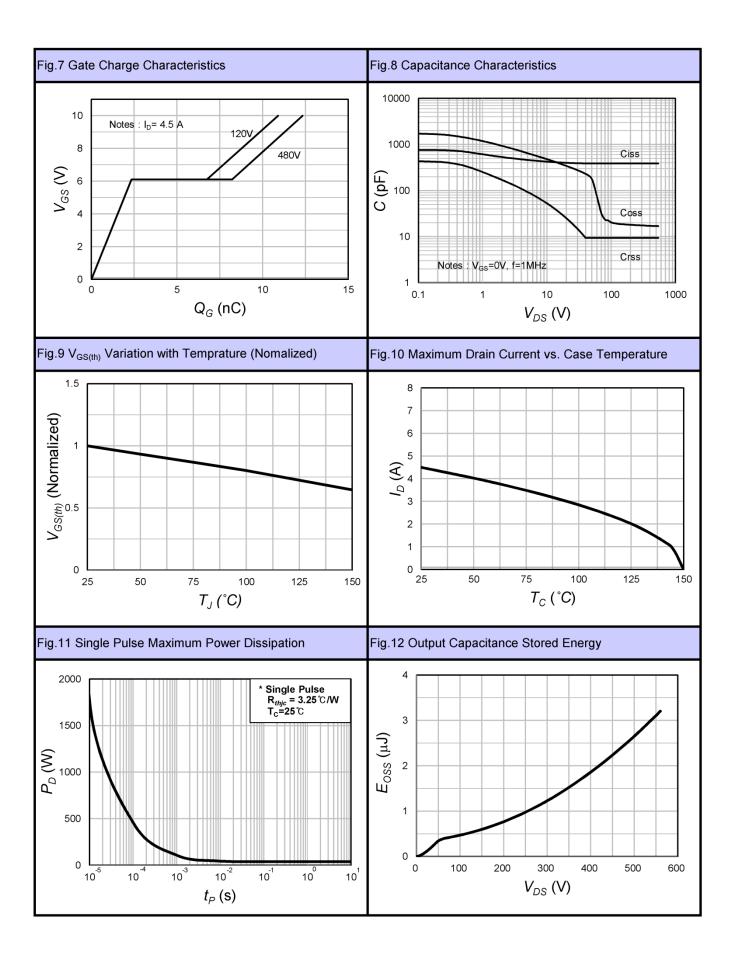





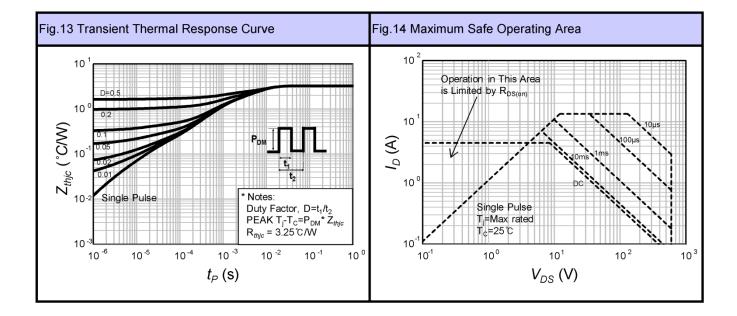



■ Test Circuit




Fig15-1. Gate charge measurement circuit




Fig15-2. Gate charge waveform




Fig16-1. Diode reverse recovery test circuit




Fig16-1. Diode reverse recovery test waveform




Fig17-1. Switching time test circuit for resistive load




Fig17-2. Switching time waveform




Fig18-1. Unclamped inductive load test circuit





Fig18-2. Unclamped inductive waveform




■ Physical Dimension

TO-252 (D-PAK), 3L

Dimensions are in millimeters, unless otherwise specified

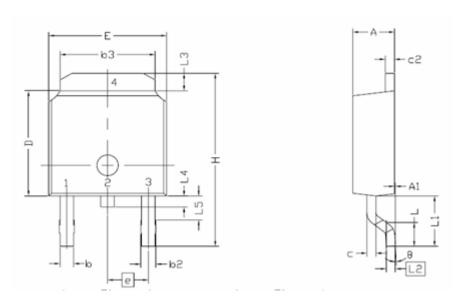



Symbol	Min.	Nom.	Max.
E	6,35	_	6,73
L	1,40	1,52	1,78
L1		2,74 REF	
L2		0,508 BCS	
L3	0,89	_	1,27
L4	_	_	1,02
L5	1,14	_	1,52
D	5,97	6,10	6,22
Н	9,40	_	10,41
b	0,64	_	0,89
b2	0,76	_	1,14
b3	4,95	_	5,46
е		2,286 BSC	
Α	2,18	_	2,39
A1	-	_	0,13
С	0,46	_	0,61
c2 D1	0,46	_	0,89
D1	5,21	_	_
E1	4,32	_	_
⊖	0,00	_	10,00





DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

MagnaChip reserves the right to change the specifications and circuitry without notice at any time. MagnaChip does not consider responsibility for use of any circuitry other than circuitry entirely included in a MagnaChip product. MagnaChip is a registered trademark of MagnaChip Semiconductor Ltd.