
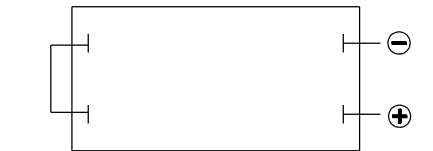
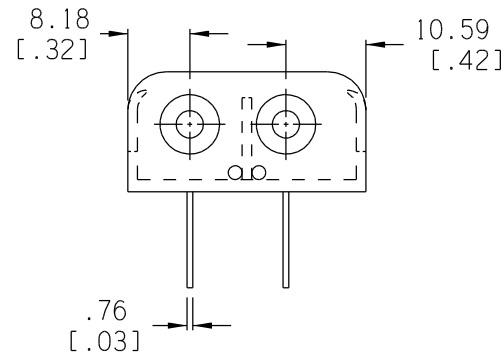
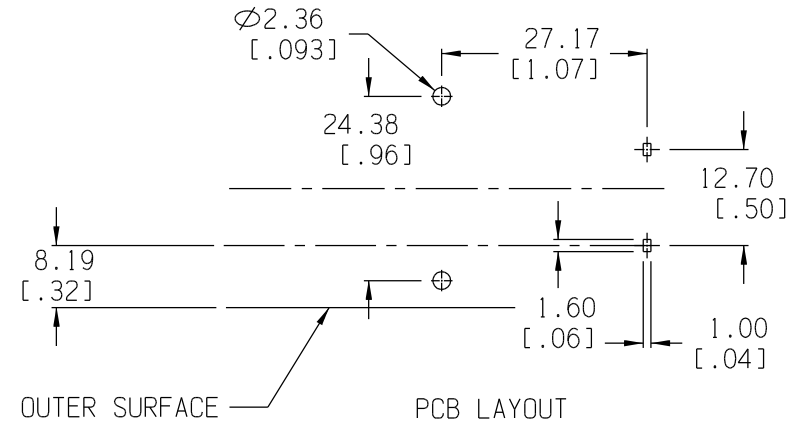
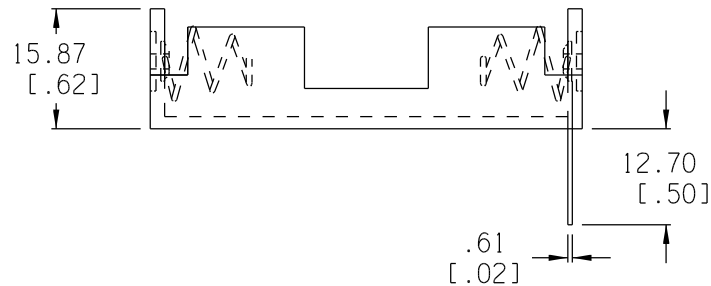


MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR
EYELETS 0.089" OD BY 0.15" FLANGE
STIMPSON GS-3 SERIES OR EQUIVALENT
ALSO ADHESIVES AND DOUBLE SIDED
TAPES WORK WELL.

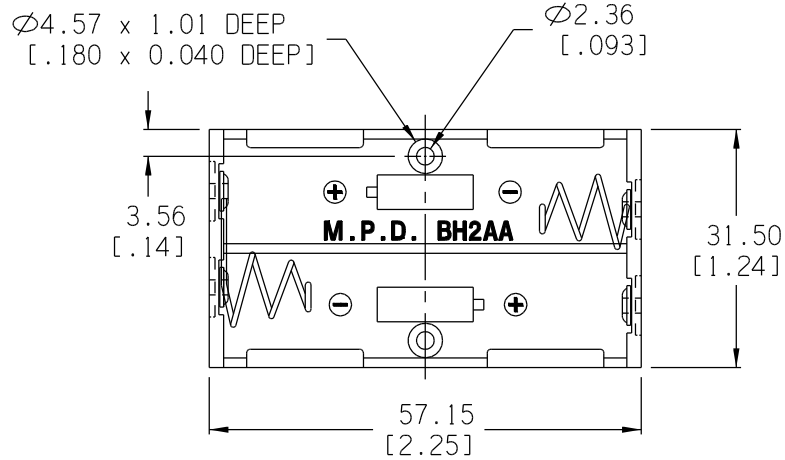

NOTES:

MATERIAL:

HOUSING: IMPACT RESISTANCE NYLON #6, BLACK, UL 94V-0,
MATERIAL FILE #UL E48285
SPRING: SPRING STEEL, NICKLE PLATED
CONTACTS: SPRING STEEL, NICKLE PLATED
EYELETS: BRASS, NICKLE PLTD.
ROHS COMPLIANT

Tolerance (Inches)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal $\pm .5$ (.020)			Scale Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title 2AA BATTERY HOLDER WITH PC PINS		
Angular $\pm 3^\circ$	Date 10/28/06	Drawing Number BH2AA-PC	

Date	SYM	REVISION RECORD	AUTH	DR	CK
12/26/03	A	Changed Material Specification	T.B.	B.S.	
1/14/06	B	Added "ROHS COMPLIANT"	T.B.	B.S.	
10/28/06	C	Added $\varnothing 2.36$ hole size to PCB layout	T.B.	B.S.	