


Solid Tantalum Chip Capacitors

TANTAMOUNT® Hi-Rel COTS, Conformal Coated Case


FEATURES

- High reliability; Weibull grading available
- Surge Current Testing per MIL-PRF-55365 options available
- Standard and Low ESR options
- Terminations: SnPb, Standard. 100 % Tin available

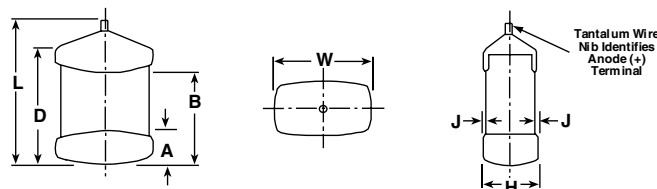

 Available
RoHS*
 COMPLIANT

PERFORMANCE/ELECTRICAL CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C
 (To + 125 °C with voltage derating)
Capacitance Range: 0.1 µF to 680 µF

Capacitance Tolerance: ± 20 %, ± 10 % standard
Voltage Rating: 4 WVDC to 50 WVDC

ORDERING INFORMATION								
T95	D	107	K	010	E	A	A	S
TYPE	CASE CODE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	TERMINATION AND PACKAGING	RELIABILITY LEVEL	SURGE CURRENT	ESR
	See Ratings and Case Codes Table.	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	K = ± 10 % M = ± 20 %	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V).	E: Sn/Pb Solder/7" (178 mm) reels L: Sn/Pb Solder/7" (178 mm) ½ reel C: 100 % Tin/7" (178 mm) reels H: 100 % Tin/7" (178 mm) ½ reel	A = 1.0 % Weibull B = 0.1 % Weibull** S = Hi-Rel Standard Burn-in Z = Non-Established Reliability	A = 10 cycles at + 25 °C B = 10 cycles at - 55 °C/+ 85 °C S = 3 cycles at + 25 °C Z = none	S = Std L = Low

DIMENSIONS in inches [millimeters]


CASE CODE	L (MAX.)	W	H	A	B	D (REF.)	J (MAX.)
B	0.158 [4.0]	0.110 + 0.012 - 0.016 [2.8 + 0.3 - 0.4]	0.075 + 0.012 - 0.024 [1.9 + 0.3 - 0.6]	0.031 ± 0.012 [0.80 ± 0.30]	0.097 ± 0.016 [2.5 ± 0.4]	0.138 [3.5]	0.004 [0.1]
C	0.281 [7.1]	0.126 ± 0.012 [3.2 ± 0.3]	0.098 ± 0.012 [2.5 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.236 [6.0]	0.004 [0.1]
D	0.293 [7.5]	0.170 ± 0.012 [4.3 ± 0.3]	0.110 ± 0.012 [2.8 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.253 [6.4]	0.004 [0.1]
R	0.283 [7.2]	0.235 ± 0.012 [6.0 ± 0.3]	0.136 ± 0.012 [3.5 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.30]	0.180 ± 0.024 [4.6 ± 0.6]	0.243 [6.2]	0.004 [0.1]
S	0.143 [3.63]	0.072 ± 0.008 [1.83 ± 0.2]	0.048 ± 0.008 [1.22 ± 0.2]	0.023 ± 0.010 [0.58 ± 0.25]	0.085 ± 0.015 [2.16 ± 0.37]	0.115 [2.9]	0.004 [0.1]
V	0.143 [3.63]	0.104 ± 0.010 [2.65 ± 0.25]	0.051 ± 0.010 [1.3 ± 0.25]	0.023 ± 0.010 [0.58 ± 0.25]	0.085 ± 0.015 [2.16 ± 0.37]	0.115 [2.9]	0.004 [0.1]
X	0.285 [7.24]	0.104 ± 0.010 [2.65 ± 0.25]	0.051 ± 0.010 [1.3 ± 0.25]	0.040 ± 0.020 [1.0 ± 0.5]	0.200 ± 0.027 [5.08 ± 0.69]	0.243 [6.2]	0.004 [0.1]
Y	0.285 [7.24]	0.104 ± 0.010 [2.65 ± 0.25]	0.069 ± 0.010 [1.75 ± 0.25]	0.040 ± 0.020 [1.0 ± 0.5]	0.200 ± 0.027 [5.08 ± 0.69]	0.243 [6.2]	0.004 [0.1]
Z	0.285 [7.24]	0.104 ± 0.010 [2.65 ± 0.25]	0.104 ± 0.010 [2.65 ± 0.25]	0.040 ± 0.020 [1.0 ± 0.5]	0.200 ± 0.027 [5.08 ± 0.69]	0.243 [6.2]	0.004 [0.1]

Note: The anode termination (D less B) will be a minimum of 0.010" (0.25 mm)

* Pb containing terminations are not RoHS compliant, exemptions may apply

** Weibull 0.1 % may not be available on all ratings. See detailed notes in ratings table or contact marketing for availability.



RATINGS AND CASE CODES								
μF	4 V	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V
0.10							S	
0.15							S	
0.22							S	
0.33							S	
0.47							S	
0.68						S	S	
1.0						S	S	
1.5					S	S	V	
2.2				S	S	V	X	
3.3			S	S	V	X	Y	
4.7		S	S	V	X	X	Z	C
6.8	S	S	V	X	X	Y	Z	D
10	S	V	X	X	Y	C/Y	Z	R
15	V	X	X	B/X	Z	Z	D/R	R
22	X	X	Y	Z	Z		R	R
33	X		Z	Z		D/R	R	
47	Y	Y	Z		R			
68	Y			R		R		
100	Z	Z	R	C/D		R		
120			R		R			
150			D/R	D	R			
180		R		R				
220		R	D/R	R				
270	D							
330	R		R	R				
390		R						
470		D						
680		R						



Solid Tantalum Chip Capacitors
TANTAMOUNT® Hi-Rel COTS, Conformal Coated Case

Vishay Sprague

STANDARD/EXTENDED RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD.(S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)
4 WVDC AT + 85 °C, SURGE = 5.2 V . . . 2.7 WVDC AT + 125 °C, SURGE = 3.4 V						
6.8	S	T95S685(1)004(2)(3)(4)L	0.5	6	N/A	2.000
10	S	T95S106(1)004(2)(3)(4)L	0.5	6	N/A	2.000
15	V	T95V156(1)004(2)(3)(4)L	0.6	6	N/A	1.500
22	X	T95X226(1)004(2)(3)(4)L	0.9	6	N/A	1.000
33	X	T95X336(1)004(2)(3)(4)L	1.3	6	N/A	1.000
47	Y	T95Y476(1)004(2)(3)(4)L	1.9	6	N/A	0.600
68	Y	T95Y686(1)004(2)(3)(4)L	2.7	6	N/A	0.600
100	Z	T95Z107(1)004(2)(3)(4)L	4.0	6	N/A	0.400
270	D	T95D277(1)004(2)(3)(4)(5)	10.8	8	0.130	0.060
330	R	T95R337(1)004(2)(3)(4)(5)	13.2	8	0.130	0.080
6.3 WVDC AT + 85 °C, SURGE = 8 V . . . 4 WVDC AT 125 °C, SURGE = 5 V						
4.7	S	T95S475(1)6R3(2)(3)(4)L	0.5	6	N/A	2.000
6.8	S	T95S685(1)6R3(2)(3)(4)L	0.5	6	N/A	2.000
10	V	T95V106(1)6R3(2)(3)(4)L	0.6	6	N/A	1.500
15	X	T95X156(1)6R3(2)(3)(4)L	0.9	6	N/A	1.000
22	X	T95X226(1)6R3(2)(3)(4)L	1.4	6	N/A	1.000
47	Y	T95Y476(1)6R3(2)(3)(4)L	2.8	6	N/A	0.600
100	Z	T95Z107(1)6R3(2)(3)(4)L	6.0	6	N/A	0.400
180	R	T95R187(1)6R3(2)(3)(4)(5)	10.8	8	0.130	0.080
220	R	T95R227(1)6R3(2)(3)(4)(5)	13.2	8	0.130	0.080
390	R	T95R397(1)6R3(2)(3)(4)(5)	23.4	8	0.130	0.045
470	D	T95D477(1)6R3(2)(3)(4)(5)	28.2	10	0.130	0.060
680	R	T95R687(1)6R3(2)(3)(4)(5)	40.8	12	0.090	0.045
10 WVDC AT + 85 °C, SURGE = 13 V . . . 7 WVDC AT 125 °C, SURGE = 8 V						
3.3	S	T95S335(1)010(2)(3)(4)L	0.5	6	N/A	2.500
4.7	S	T95S475(1)010(2)(3)(4)L	0.5	6	N/A	2.000
6.8	V	T95V685(1)010(2)(3)(4)L	0.7	6	N/A	2.000
10	X	T95X106(1)010(2)(3)(4)L	1.0	6	N/A	1.500
15	X	T95X156(1)010(2)(3)(4)L	1.5	6	N/A	1.000
22	Y	T95Y226(1)010(2)(3)(4)L	2.2	6	N/A	0.600
33	Z	T95Z336(1)010(2)(3)(4)L	3.3	6	N/A	0.400
47	Z	T95Z476(1)010(2)(3)(4)L	4.7	6	N/A	0.400
100	R	T95R107(1)010(2)(3)(4)(5)	10.0	8	0.140	0.075
120	R	T95R127(1)010(2)(3)(4)(5)	12.0	8	0.140	0.070
150	D	T95D157(1)010(2)(3)(4)(5)	15.0	8	0.140	0.075
150	R	T95R157(1)010(2)(3)(4)(5)	15.0	8	0.130	0.065
220	D	T95D227(1)010(2)(3)(4)(5)	22.0	8	0.140	0.065
220	R	T95R227(1)010(2)(3)(4)(5)	22.0	8	0.130	0.055
330	R	T95R337(1)010(2)(3)(4)(5)	33.0	8	0.130	0.055

(1) Capacitance Tolerance: K, M
 (2) Termination and Packaging: C, E, H, L
 (3) Reliability Level: A, S, Z

(4) Surge Current: A, B, S, Z
 (5) ESR: L, S
 (6) Reliability Level: A, B, S, Z



STANDARD/EXTENDED RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD.(S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)
16 WVDC AT + 85 °C, SURGE = 20 V . . . 10 WVDC AT + 125 °C, SURGE = 12 V						
2.2	S	T95S225(1)016(2)(3)(4)L	0.5	6	N/A	3.500
3.3	S	T95S335(1)016(2)(3)(4)L	0.5	6	N/A	2.500
4.7	V	T95V475(1)016(2)(3)(4)L	0.8	6	N/A	2.000
6.8	X	T95X685(1)016(2)(3)(4)L	1.1	6	N/A	1.500
10	X	T95X106(1)016(2)(3)(4)L	1.6	6	N/A	1.500
15	B	T95B156(1)016(2)(3)(4)(5)	2.4	6	0.750	0.550
15	X	T95X156(1)016(2)(3)(4)L	2.4	6	N/A	0.600
22	Z	T95Z226(1)016(2)(3)(4)L	3.5	6	N/A	0.400
33	Z	T95Z336(1)016(2)(3)(4)L	5.3	6	N/A	0.400
68	R	T95R686(1)016(2)(3)(4)(5)	10.9	6	0.600	0.095
100	C	T95C107(1)016(2)(3)(4)(5)	16.0	8	0.600	0.090
100	D	T95D107(1)016(2)(6)(4)(5)	16.0	8	0.140	0.080
150	D	T95D157(1)016(2)(3)(4)(5)	24.0	8	0.140	0.085
180	R	T95R187(1)016(2)(3)(4)(5)	28.8	8	0.130	0.055
220	R	T95R227(1)016(2)(3)(4)(5)	35.2	8	0.120	0.055
330	R	T95R337(1)016(2)(6)(4)(5)	52.8	14	0.110	0.055
20 WVDC AT + 85 °C, SURGE = 26 V . . . 13 WVDC AT + 125 °C, SURGE = 16 V						
1.5	S	T95S155(1)020(2)(3)(4)L	0.5	6	N/A	3.500
2.2	S	T95S225(1)020(2)(3)(4)L	0.5	6	N/A	3.500
3.3	V	T95V335(1)020(2)(3)(4)L	0.7	6	N/A	3.000
4.7	X	T95X475(1)020(2)(3)(4)L	0.9	6	N/A	1.500
6.8	X	T95X685(1)020(2)(3)(4)L	1.4	6	N/A	1.500
10	Y	T95Y106(1)020(2)(3)(4)L	2.0	6	N/A	1.000
15	Z	T95Z156(1)020(2)(3)(4)L	3.0	6	N/A	0.600
22	Z	T95Z226(1)020(2)(3)(4)L	4.4	6	N/A	0.400
47	D	T95D476(1)020(2)(6)(4)(5)	9.4	6	0.190	0.095
47	R	T95R476(1)020(2)(3)(4)L	9.4	6	0.200	0.110
120	R	T95R127(1)020(2)(3)(4)(5)	24.0	8	0.140	0.080
150	R	T95R157(1)020(2)(3)(4)(5)	30.0	8	0.140	0.075
25 WVDC AT + 85 °C, SURGE = 32 V . . . 17 WVDC AT + 125 °C, SURGE = 20 V						
0.68	S	T95S684(1)025(2)(3)(4)L	0.5	4	N/A	5.000
1	S	T95S105(1)025(2)(3)(4)L	0.5	4	N/A	3.500
1.5	S	T95S155(1)025(2)(3)(4)L	0.5	6	N/A	3.500
2.2	V	T95V225(1)025(2)(3)(4)L	0.6	6	N/A	2.000
3.3	X	T95X335(1)025(2)(3)(4)L	0.8	6	N/A	1.500
4.7	X	T95X475(1)025(2)(3)(4)L	1.2	6	N/A	1.500
6.8	Y	T95Y685(1)025(2)(3)(4)L	1.7	6	N/A	1.000
10	C	T95C106(1)025(2)(3)(4)(5)	2.5	6	0.570	0.280
10	Y	T95Y106(1)025(2)(3)(4)L	2.5	6	N/A	1.000
15	Z	T95Z156(1)025(2)(3)(4)L	3.8	6	N/A	0.600
33	D	T95D336(1)025(2)(3)(4)(5)	8.3	6	0.260	0.130
33	R	T95R336(1)025(2)(3)(4)(5)	8.3	6	0.250	0.130
68	D	T95D686(1)025(2)(6)(4)(5)	17.0	6	0.260	0.150
68	R	T95R686(1)025(2)(3)(4)(5)	17.0	6	0.200	0.095
100	R	T95R107(1)025(2)(3)(4)S	25	8	0.200	0.090

(1) Capacitance Tolerance: K, M
 (2) Termination and Packaging: C, E, H, L
 (3) Reliability Level: A, S, Z

(4) Surge Current: A, B, S, Z
 (5) ESR: L, S
 (6) Reliability Level: A, B, S, Z



Solid Tantalum Chip Capacitors
TANTAMOUNT® Hi-Rel COTS, Conformal Coated Case

Vishay Sprague

STANDARD/EXTENDED RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD.(S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)
35 WVDC AT + 85 °C, SURGE = 46 V . . . 23 WVDC AT + 125 °C, SURGE = 28 V						
0.10	S	T95S104(1)035(2)(3)(4)L	0.5	4	N/A	20.000
0.15	S	T95S104(1)035(2)(3)(4)L	0.5	4	N/A	18.000
0.22	S	T95S224(1)035(2)(3)(4)L	0.5	4	N/A	15.000
0.33	S	T95S334(1)035(2)(3)(4)L	0.5	4	N/A	12.000
0.47	S	T95S474(1)035(2)(3)(4)L	0.5	4	N/A	9.000
0.68	S	T95S684(1)035(2)(3)(4)L	0.5	4	N/A	5.000
1	S	T95S105(1)035(2)(3)(4)L	0.5	4	N/A	3.500
1.5	V	T95V155(1)035(2)(3)(4)L	0.5	6	N/A	3.000
2.2	X	T95X225(1)035(2)(3)(4)L	0.8	6	N/A	2.000
3.3	Y	T95Y335(1)035(2)(3)(4)L	1.2	6	N/A	1.500
4.7	Z	T95Z475(1)035(2)(3)(4)L	1.6	6	N/A	0.800
6.8	Z	T95Z685(1)035(2)(3)(4)L	2.4	6	N/A	0.800
10	Z	T95Z106(1)035(2)(3)(4)L	3.5	6	N/A	0.600
15	D	T95D156(1)035(2)(3)(4)(5)	5.3	6	0.410	0.270
15	R	T95R156(1)035(2)(3)(4)(5)	5.3	6	0.380	0.190
22	R	T95R226(1)035(2)(3)(4)(5)	7.7	6	0.280	0.240
33	R	T95R336(1)035(2)(3)(4)(5)	11.6	6	0.280	0.200
50 WVDC AT + 85 °C, SURGE = 65 V . . . 33 WVDC AT + 125 °C, SURGE = 40 V						
4.7	C	T95C475(1)050(2)(3)(4)(5)	2.4	6	1.4	1.0
6.8	D	T95D685(1)050(2)(3)(4)(5)	3.4	6	0.820	0.450
10	R	T95R106(1)050(2)(3)(4)(5)	5.0	6	0.650	0.500
15	R	T95R156(1)050(2)(3)(4)(5)	7.5	6	0.400	0.350
22	R	T95R226(1)050(2)(3)(4)(5)	11.0	6	0.390	0.300

(1) Capacitance Tolerance: K, M
 (2) Termination and Packaging: C, E, H, L
 (3) Reliability Level: A, S, Z

(4) Surge Current: A, B, S, Z
 (5) ESR: L, S
 (6) Reliability Level: A, B, S, Z



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.