

Solid Tantalum Chip Capacitors TANTAMOUNT[®], Hi-Rel COTS, Ultra-Low ESR, Conformal Coated Case



FEATURES

- High reliability; Weibull failure rate grading available
- Surge current testing per MIL-PRF-55365 options available
- Ultra-low ESR
- Tin/Lead (SnPb) termination available



PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C
(To + 125 °C with voltage derating)
Capacitance Range: 22 μF to 1500 μF

Capacitance Tolerance: ± 10 %, ± 20 % standard
Voltage Rating: 4 WVDC to 50 WVDC

ORDERING INFORMATION							
T97	R	227	K	020	E	S	A
TYPE	CASE CODE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	TERMINATION/ PACKAGING (Available options are series dependent)	RELIABILITY LEVEL	SURGE CURRENT
	See Ratings and Case Codes Table.	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	K = ± 10 % M = ± 20 %	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V).	E = Sn/Pb Solder/7" (178 mm) reel L = Sn/Pb Solder/7" (178 mm), 1/2 reel C = 100 % Tin/7" (178 mm), reel H = 100 % Tin/7" (178 mm), 1/2 reel	A = 1.0 % Weibull B = 0.1 % Weibull** S = 40 h Burn-in Z = Non-Established Reliability	A = 10 CYCLES at + 25 °C B = 10 CYCLES at - 55 °C/+ 85 °C S = 3 CYCLES at 25 °C Z = NONE

Note: ** Available on select ratings. See ratings table on page 7.

DIMENSIONS in inches [millimeters]							
CASE CODE	L (Max.)	W	H	A	B	D (Ref.)	J (Max.)
E	0.287 ± 0.012 [7.3 ± 0.3]	0.173 ± 0.016 [4.4 ± 0.4]	0.157 ± 0.016 [4.0 ± 0.4]	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.025 [4.6 ± 0.6]	0.253 [6.4]	0.004 [0.1]
F	0.287 ± 0.012 [7.3 ± 0.3]	0.238 ± 0.016 [6.0 ± 0.4]	0.187 ± 0.016 [4.7 ± 0.4]	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.025 [4.6 ± 0.6]	0.243 [6.2]	0.004 [0.1]
R	0.287 ± 0.012 [7.3 ± 0.3]	0.238 ± 0.016 [6.0 ± 0.4]	0.142 ± 0.016 [3.6 ± 0.4]	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.025 [4.6 ± 0.6]	0.243 [6.2]	0.004 [0.1]
V	0.287 ± 0.012 [7.3 ± 0.3]	0.173 ± 0.016 [4.4 ± 0.4]	0.079 [2.0] Max.	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.025 [4.6 ± 0.6]	0.253 [6.4]	0.004 [0.1]
Z	0.287 ± 0.012 [7.3 ± 0.3]	0.238 ± 0.016 [6.0 ± 0.4]	0.238 ± 0.016 [6.0 ± 0.4]	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.025 [4.6 ± 0.6]	0.243 [6.2]	0.004 [0.1]

Note: The anode termination (D less B) will be a minimum of 0.012" [0.3 mm]

* Pb containing terminations are not RoHS compliant, exemptions may apply



Solid Tantalum Chip Capacitors
TANTAMOUNT® Hi-rel COTS, Ultra-Low ESR,
 Conformal Coated Case

Vishay Sprague

RATINGS AND CASE CODE										
µF	4 V	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V	63 V	75 V
10										
15								E		
22								R	F	
33								F		
47							R	F		
68						R				
100										
150						F				
220				E	R					
330		V	E		F					
470	V	E	E							
680	E	E	R							
1000	E/R	R								
1500	R									
2200										

STANDARD/EXTENDED RATINGS						
CAPACITANCE (µF)	CASE CODE	PART NUMBER*	MAX. DCL at + 25 °C (µA)	MAX. DF at + 25 °C 120 Hz (%)	MAX. ESR at + 25 °C 100 kHz (mΩ)	MAX. RIPPLE 100 kHz IRMS (A)
4 WVDC at + 85 °C, SURGE = 5.2 V . . . 2.7 WVDC at + 125 °C, SURGE = 3.4 V						
470	V	T97V477(1)004(2)(3)(5)	19	8	30	2.2
680	E	T97E687(1)004(2)(3)(5)	27	6	25	2.9
1000	E	T97E108(1)004(2)(3)(5)	40	8	20	3.3
1000	R	T97R108(1)004(2)(3)(5)	40	8	18	3.7
1500	R	T97R158(1)004(2)(3)(5)	60	8	15	4.1
6.3 WVDC at + 85 °C, SURGE = 8 V . . . 4 WVDC at + 125 °C, SURGE = 5 V						
330	V	T97V337(1)6R3(2)(3)(5)	21	8	35	2.0
470	E	T97E477(1)6R3(2)(3)(5)	30	6	30	2.7
680	E	T97E687(1)6R3(2)(3)(5)	43	6	25	2.9
1000	R	T97R108(1)6R3(2)(3)(5)	63	8	20	3.5
10 WVDC at + 85 °C, SURGE = 13 V . . . 7 WVDC at + 125 °C, SURGE = 8 V						
330	E	T97E337(1)010(2)(3)(5)	33	6	35	2.5
470	E	T97E477(1)010(2)(3)(5)	47	6	28	2.8
680	R	T97R687(1)010(2)(3)(5)	68	6	28	2.9
16 WVDC at + 85 °C, SURGE = 20 V . . . 10 WVDC at + 125 °C, SURGE = 12 V						
220	E	T97E227(1)016(2)(3)(5)	35	8	40	2.3
20 WVDC at + 85 °C, SURGE = 26 V . . . 13 WVDC at + 125 °C, SURGE = 16 V						
220	R	T97R227(1)020(2)(3)(5)	44	8	80	1.8
330	F	T97F337(1)020(2)(3)(5)	66	10	100	1.4
25 WVDC at + 85 °C, SURGE = 32 V . . . 17 WVDC at + 125 °C, SURGE = 20 V						
68	R	T97R686(1)025(2)(3)(5)	17	6	100	1.6
150	F	T97F157(1)025(2)(3)(5)	38	8	80	1.8
35 WVDC at + 85 °C, SURGE = 46 V . . . 23 WVDC at + 125 °C, SURGE = 28 V						
47	R	T97R476(1)035(2)(3)(5)	17	6	80	1.8
50 WVDC at + 85 °C, SURGE = 65 V . . . 33 WVDC at + 125 °C, SURGE = 38 V						
15	E	T97E156(1)050(2)(3)(5)	8	6	200	0.8
22	R	T97R226(1)050(2)(3)(5)	11	6	170	0.8
33	F	T97F336(1)050(2)(3)(5)	17	6	150	0.8
47	Z	T97Z476(1)050(2)(3)(5)	24	6	145	1.1
63 WVDC at + 85 °C, SURGE = 81 V . . . 42 WVDC at + 125 °C, SURGE = 54 V						
22	F	T97F226(1)063(2)(3)(5)	14	6	200	0.9

Notes:


- * Contact factory for availability
- (1) Capacitance Tolerance: K, M
- (2) Termination and Packaging: C, E, H, L

- (3) Reliability Level: A, S, Z
- (4) Reliability Level: A,B, S, Z
- (5) Surge Current: A, B, S, Z




TYPICAL CURVES


T97 1500 μ F - 4 V 'R' CASE SIZE ESR and Z vs. FREQUENCY

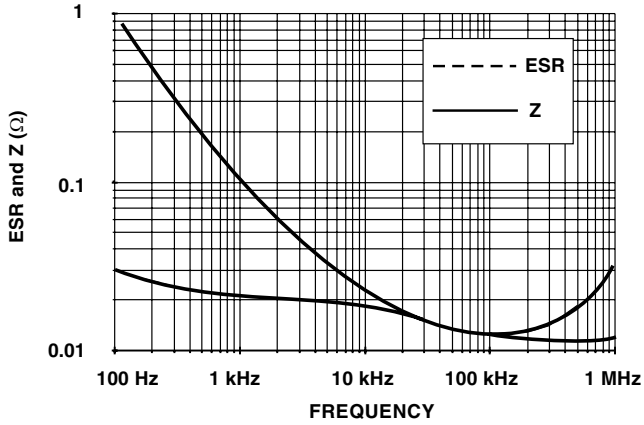


T97 330 μ F - 10 V 'E' CASE SIZE ESR and Z vs. FREQUENCY

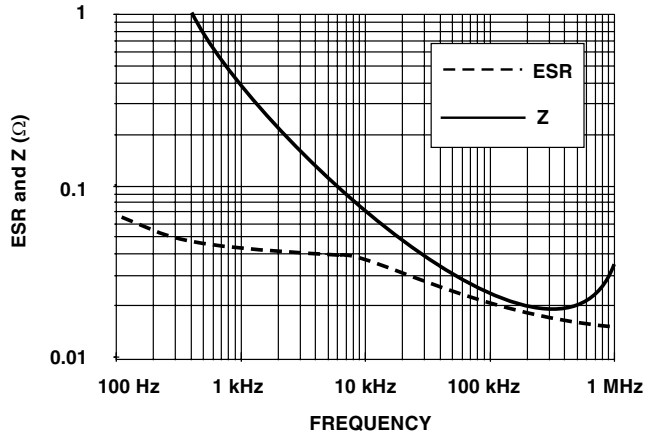


T97 1000 μ F - 4 V 'E' CASE SIZE ESR and Z vs. FREQUENCY

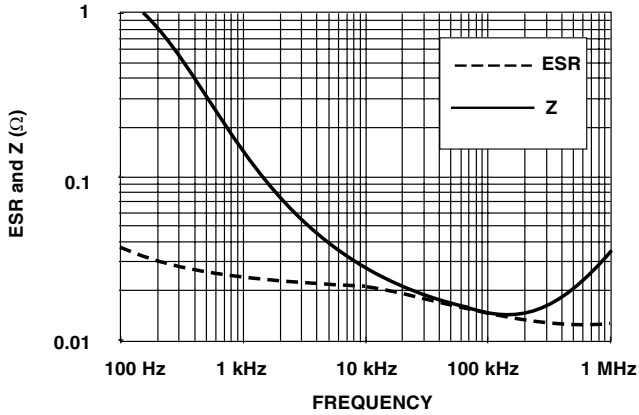


T97 1000 μ F - 6.3 V 'R' CASE SIZE ESR and Z vs. FREQUENCY

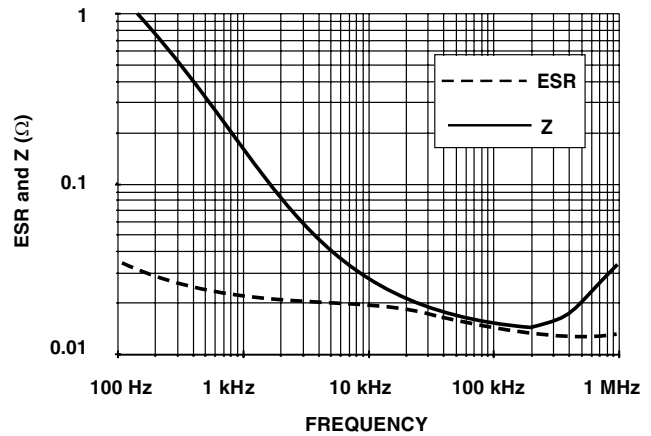

T97 330 μ F - 6.3 V 'V' CASE SIZE ESR and Z vs. FREQUENCY

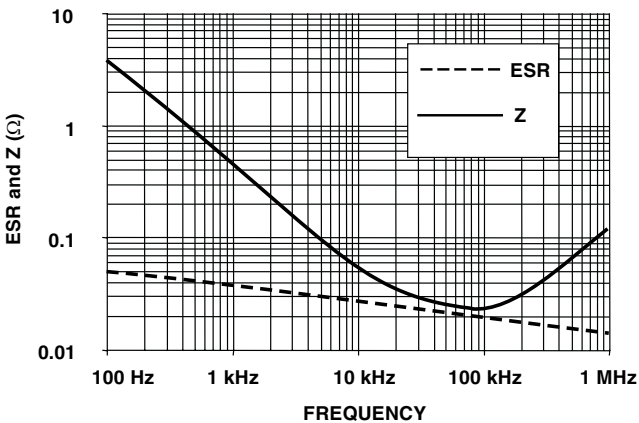

T97 470 μ F - 4 V 'V' CASE SIZE ESR and Z vs. FREQUENCY

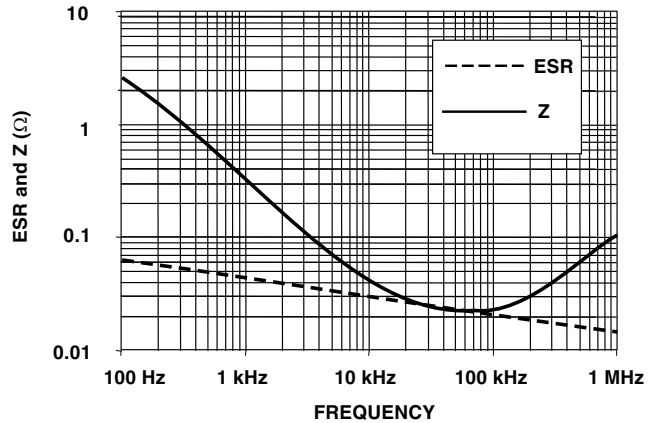



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.