



# SMT Power Inductors – DO5022 Series



This series of surface mount power inductors is designed for the higher current requirements of notebook computers and other portable and handheld devices.

A 1  $\mu$ H inductor is rated at 8.6 Arms with a saturation current of 20 Amps. Exceptionally low dc resistance (as low as 0.009 Ohm) keeps power losses to a minimum.


The DO5022 Series was designed specifically for surface mounting. It has a flat top for reliable pick-and place operations and features robust temperature deflection.

In addition to the standard versions shown here, custom inductors are available to meet your exact requirements.

Coilcraft **Designer's Kit C111** contains three samples each of the standard parts shown. To order, contact Coilcraft or visit <http://order.coilcraft.com>.


**SPICE models** ON OUR WEB SITE OR CD

Part number	L $\pm 20\%$ <sup>1</sup> ( $\mu$ H)	DCR max (Ohms)	SRF typ <sup>2</sup> (MHz)	Isat <sup>3</sup> (A)	Irms <sup>4</sup> (A)
DO5022P-102	1.0	0.009	80	20	8.6
DO5022P-222	2.2	0.014	80	16	7.1
DO5022P-332	3.3	0.018	60	14	6.2
DO5022P-562	5.6	0.020	40	12	5.3
DO5022P-103	10	0.031	30	10	4.3
<b>DO5022P-153</b>	<b>15</b>	<b>0.036</b>	<b>22</b>	<b>8.0</b>	<b>4.0</b>
<b>DO5022P-223</b>	<b>22</b>	<b>0.047</b>	<b>20</b>	<b>7.0</b>	<b>3.5</b>
<b>DO5022P-333</b>	<b>33</b>	<b>0.066</b>	<b>15</b>	<b>5.5</b>	<b>3.0</b>
<b>DO5022P-473</b>	<b>47</b>	<b>0.086</b>	<b>9</b>	<b>4.5</b>	<b>2.6</b>
<b>DO5022P-683</b>	<b>68</b>	<b>0.13</b>	<b>8</b>	<b>3.5</b>	<b>2.3</b>
<b>DO5022P-104</b>	<b>100</b>	<b>0.19</b>	<b>7</b>	<b>3.0</b>	<b>1.8</b>
<b>DO5022P-154</b>	<b>150</b>	<b>0.25</b>	<b>6</b>	<b>2.6</b>	<b>1.5</b>
<b>DO5022P-224</b>	<b>220</b>	<b>0.38</b>	<b>5</b>	<b>2.4</b>	<b>1.2</b>
<b>DO5022P-334</b>	<b>330</b>	<b>0.56</b>	<b>4</b>	<b>1.9</b>	<b>1.0</b>
DO5022P-474	470	0.85	3	1.4	0.82
DO5022P-684	680	1.1	2.5	1.2	0.72
DO5022P-105	1000	1.8	2	1.0	0.56

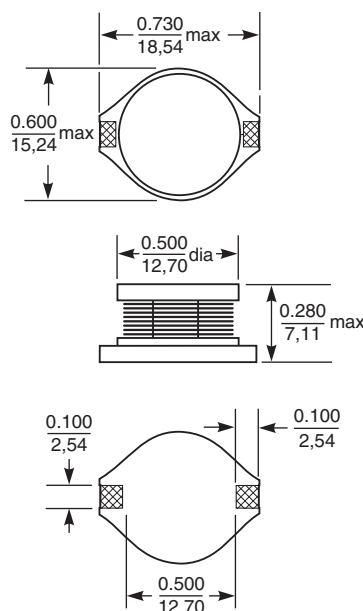

**Recommended Land Pattern**

## Part Marking

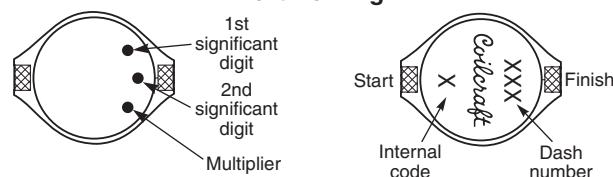

**Weight:** 2.8 – 3.9 g  
**Terminations:** Nickel/gold over phos bronze  
**Tape and reel:** 250/13" reel 32 mm tape width  
 For packaging data see Tape and Reel Specifications section.

**Coilcraft**<sup>®</sup>

Specifications subject to change without notice. Document 172 Revised 12/10/04


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>




# SMT Power Inductors – DO5022 Series

## Typical L vs Frequency

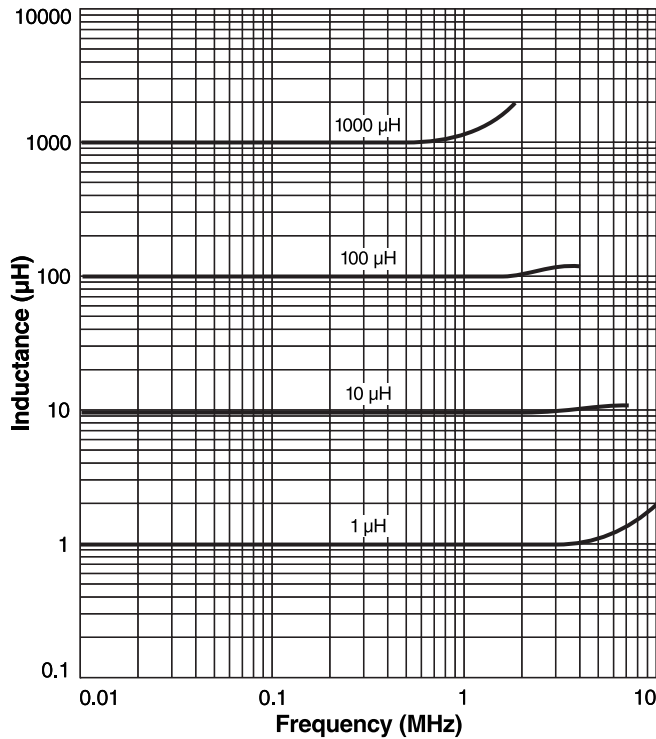

## Typical L vs Current

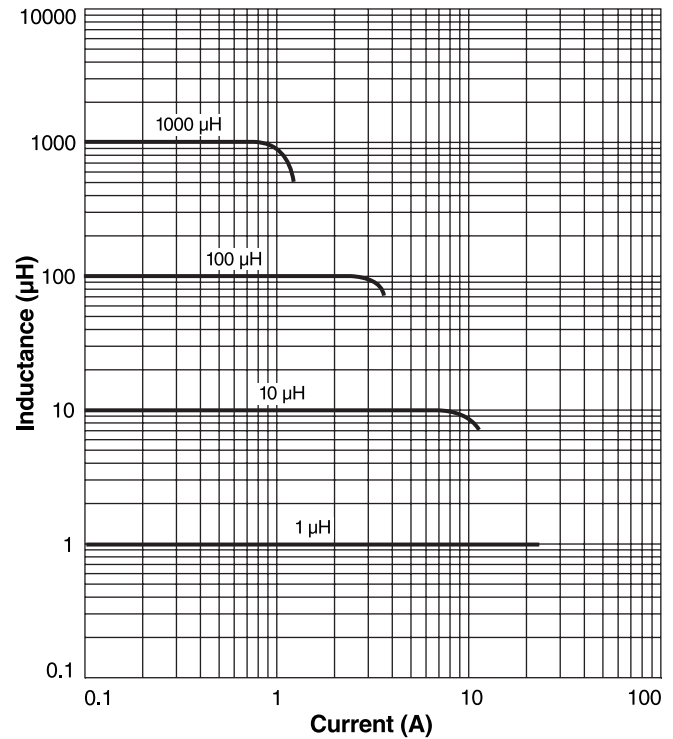

**Coilcraft®**

Specifications subject to change without notice. Document 172-2 Revised 10/31/03

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>