

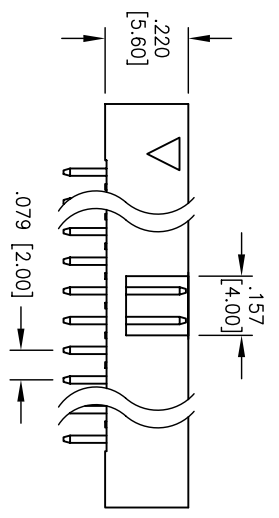
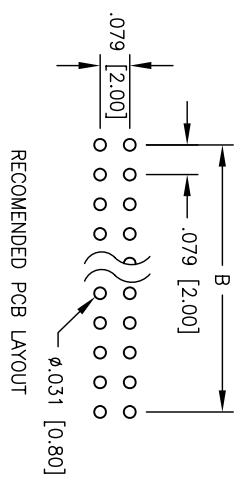


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/12/05	

APPROVED: _____ TITLE: _____
 DATE: _____

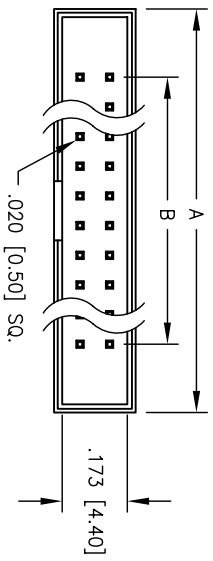

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
Plating:
 Gold Flash over Nickel underplate on mating area,
 Tin over Copper underplate on tails

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55C to +105C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 230 for 5 sec.

A = .079 [2.00] X No. of Spaces + .362 [9.20]
 B = .079 [2.00] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .10 ±.10
 .XX ±.020
 .XXX ±.015
 Holes: .10 ±.10
 .XXX ±.015

APPROVALS	DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.0mm BOX HEADER, VERTICAL
 PCB, SELECTIVE GOLD PLATED

DRAWN	SS	12/12/05	SIZE	PART NO.	SCALE:	SHEET	OF
CHECKED			X	2BHR-XX-VSGA	NTS	1	1
APPROVED			REF:				

