

HDJ-20 All-Plastic Jacketed Cable Connectors (for Crimp Snap-In Contacts)

Plug Housing 9 Position, Shell Size 1

Part No. 745032-1

Note: 9 Pos. Housing Dim. (Typ.)—
.757 [19.23] L x .690 [17.53] W
x .324 [8.23] H



Note: These plug housings accept size 20 DF pin contact (tin plated), Part No. 1-66507-4 for 28-24 AWG [0.08-0.2 mm²] wire sizes and Part No. 1-66506-4 for 24-20 AWG [0.2-0.5 mm²] wire sizes. For computer applications, AMP recommends the use of gold plated pin contacts (see pages 2279 and 2280.)

Plug Housing HDP-20 9-Position, Shell Size 1

Part No. 745018-1
(Used with HDJ-20 Receptacle
Part No. 207752-1)

Note: 9 Pos. Housing Dim. (Typ.)—
1.198 [30.43] L x .681 [17.30] W
x .479 [12.17] H



Receptacle Housing 9 Position, Shell Size 1


Part No. 207752-1

Note: 9 Pos. Housing Dim. (Typ.)—
.642 [16.31] L x .642 [16.31] W
x .310 [2.84] H




Note: These receptacle housings accept size 20 DF pin contact (tin plated), Part No. 1-66505-4 for 28-24 AWG [0.08-0.2 mm²] wire sizes and Part No. 1-66504-4 for 24-20 AWG [0.2-0.5 mm²] wire sizes. For computer applications, AMP recommends the use of gold plated socket contacts. (See pages 2279 and 2280.)

Standard Cord Guards 9 Position

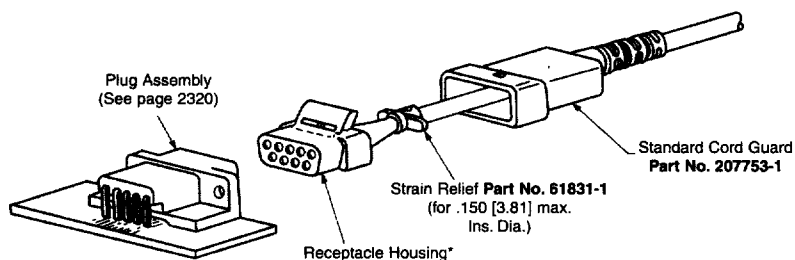

*Standard Cord Guards also can be used on plug housings (shown above).

Squeeze-to-Release Cord Guards 9 Position

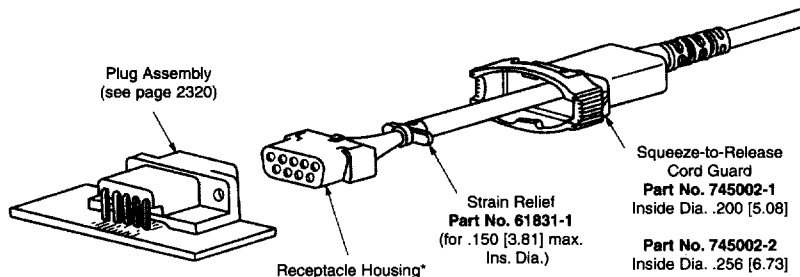

*Squeeze-to-Release Cord Guards also can be used on plug housings (shown above).