
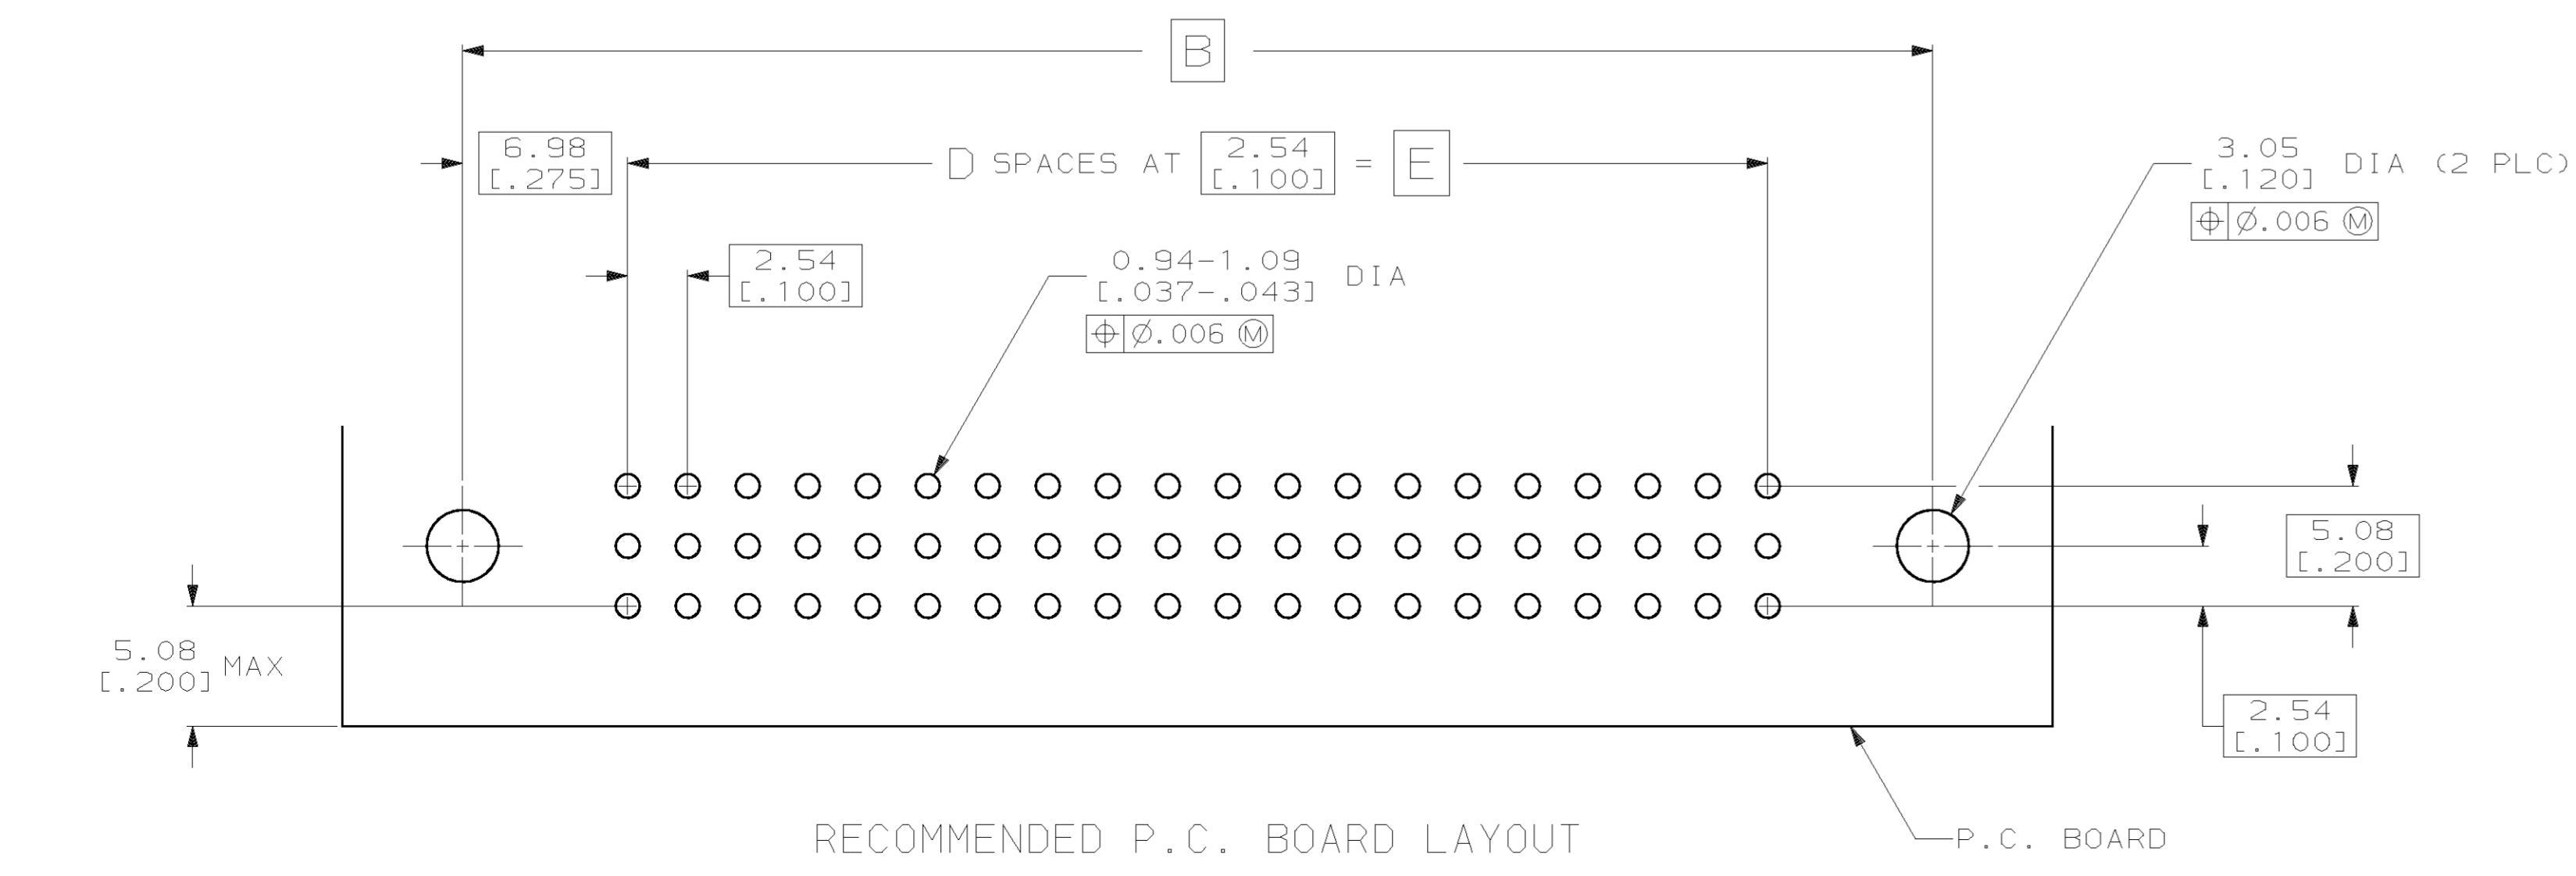
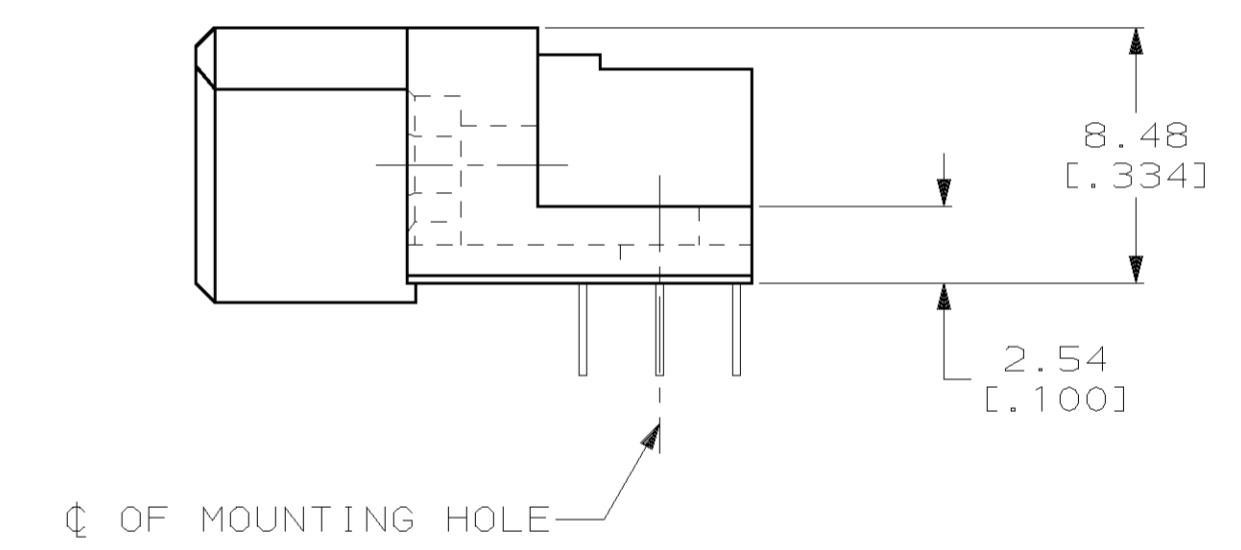
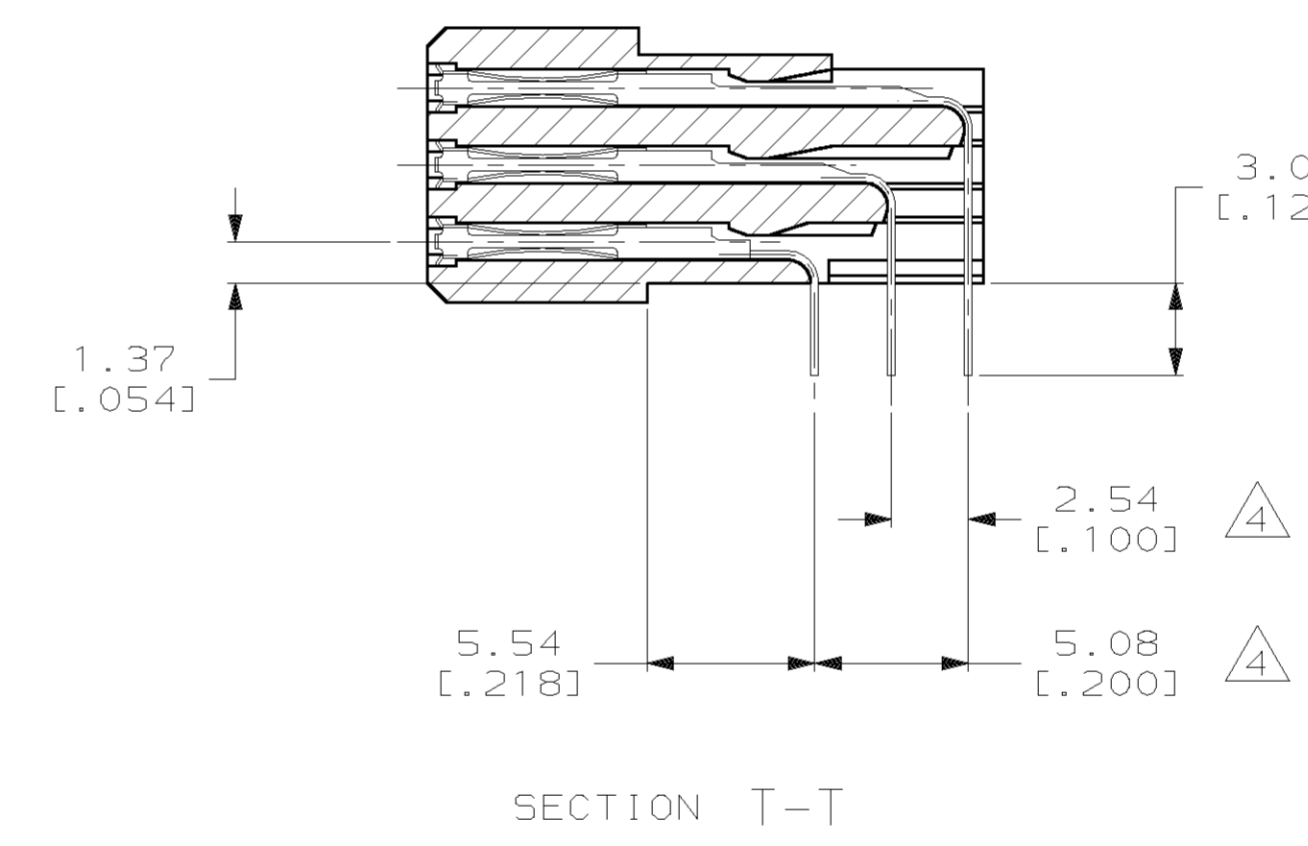
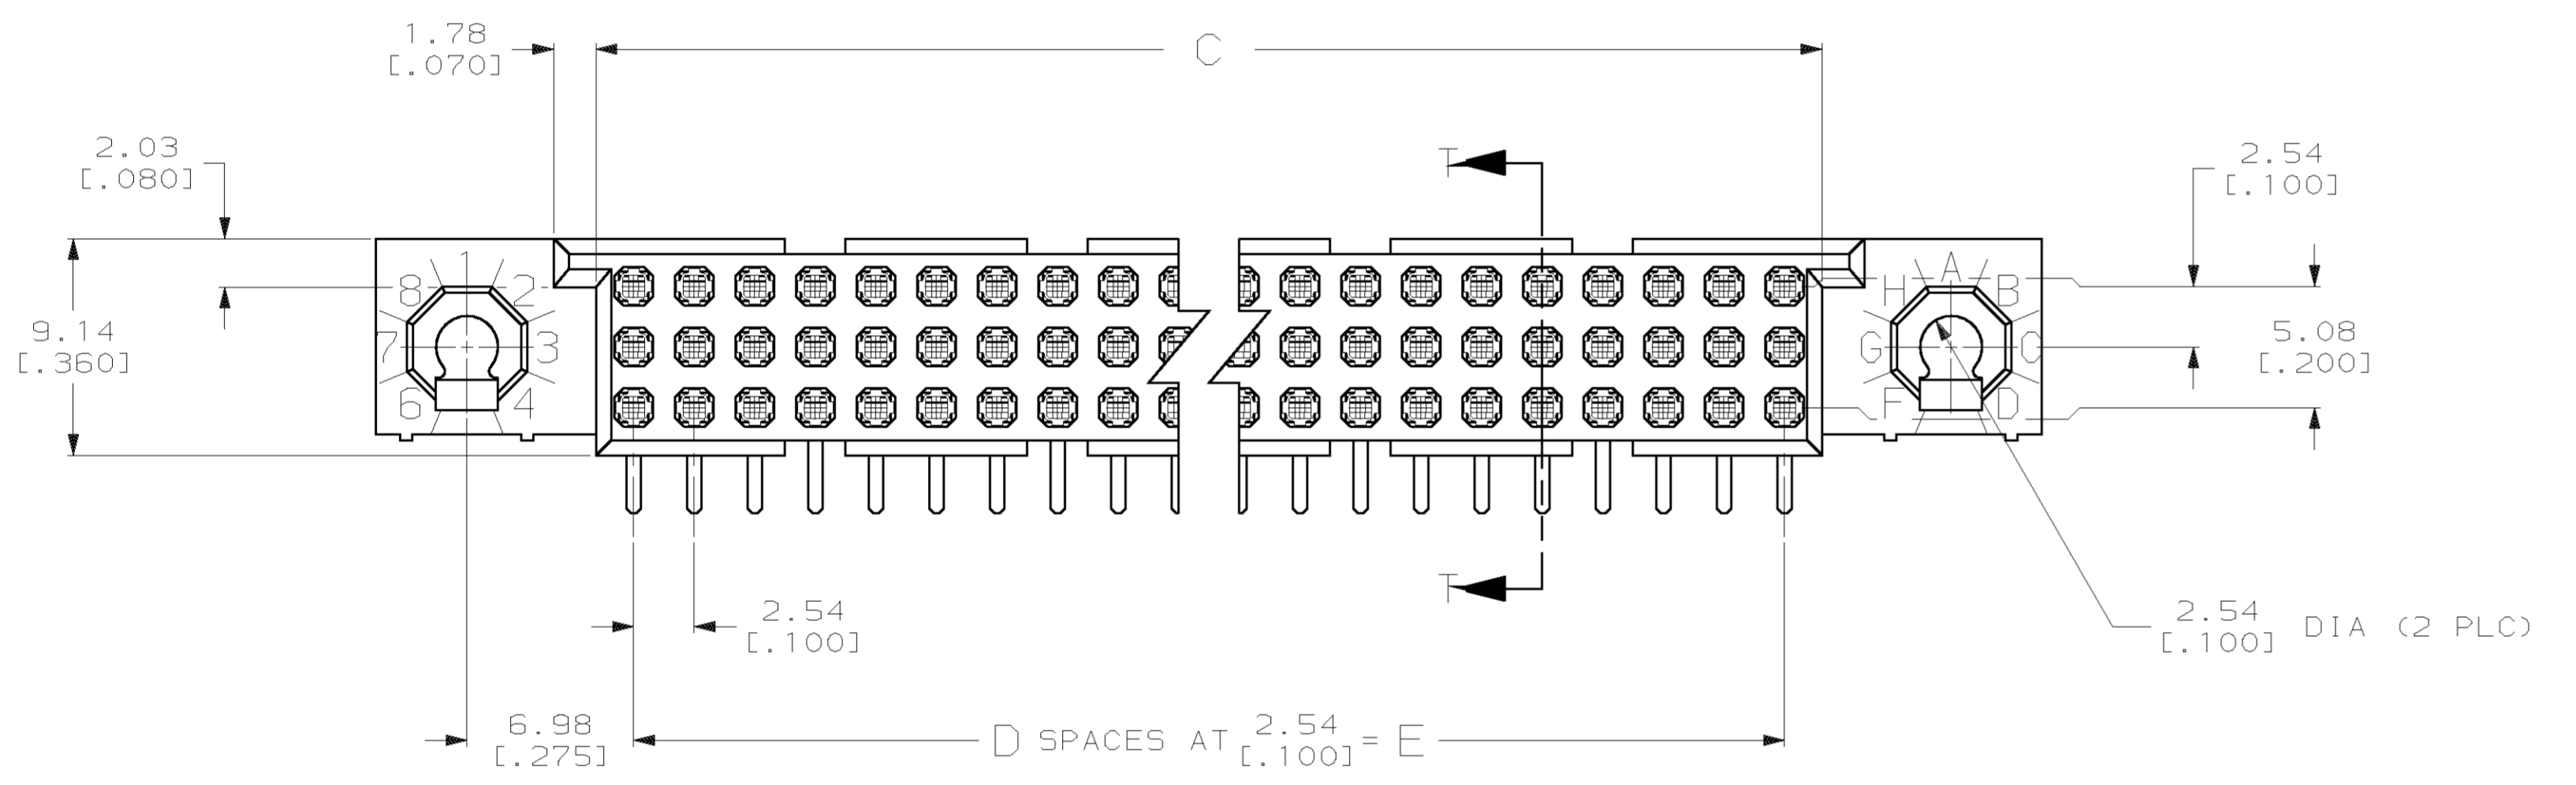


LOC	DIST	P	F	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
AD	00					E	ECN AD4218	06/18/90	RKS
						F	REACTIVATE -8	9/22/92	TH
						G	PER EC 0564-95	T.S. 10-11-95	GS
						H	PER EC 0180-96	T.S. 2-8-96	DH
						J	PER EC 0010-0830-96	T.S. 5-22-97	JR
						K	REV PER EC 0512-0458-02	19 MAR 03	WM
						L	REVISED PER 0512-0091-03	21 JUL 03	WM

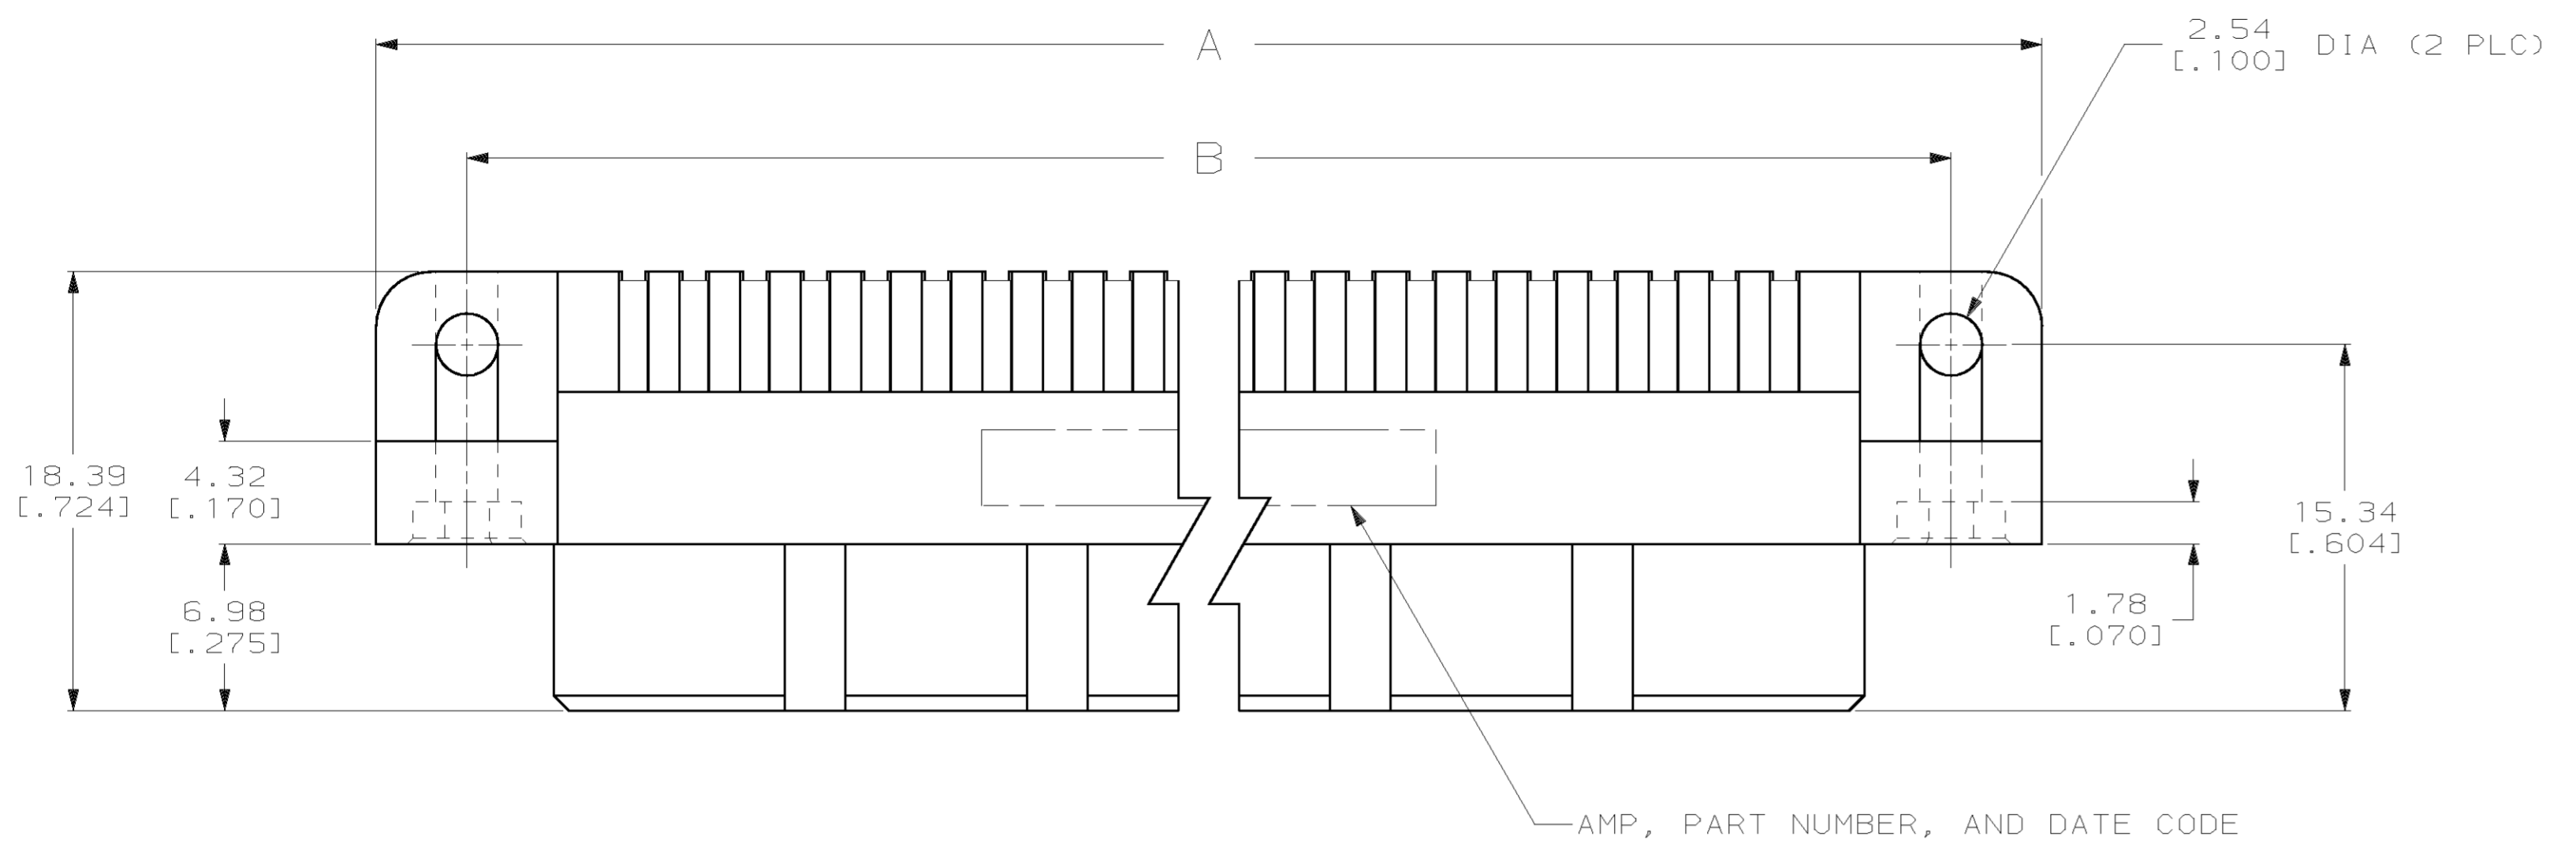

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES]		DR 06/18/90 R.K. SEIFRIED		PART NO	
TOLERANCES ON:		CHK 10/6/92 G. SKIPPER		AMP AMP Incorporated Harrisburg, PA 17105-3508	
2 PLC DEC ±		APPD 10/6/92 G. SKIPPER		NAME	
3 PLC DEC ± 0.13 [.005]		APPD 10/6/92 G. SKIPPER		HDI, 3 ROW, RECEPTACLE ASSEMBLY, 3.05 [.120] LONG SOLDER TAILS, .00076 [.000030] GOLD PLATE	
ANGLES ±		PRODUCT SPEC		SIZE	
MATERIAL		APPLICATION SPEC		D 00779	
FINISH		SCALE		CAGE CODE	
WEIGHT		4:1		DRAWING NO	
				533268	
				SHEET	
				1 OF 2	

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AD	00			L		SEE SHEET 1	-	-

- ① HOUSING MATERIAL: THERMOPLASTIC, COLOR-NATURAL.
- ② CONTACT MATERIAL: COPPER ALLOY.
- ③ CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN-LEAD PLATED SOLDER TAILS.
- ④ SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- ⑥ HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.
- ⑦ PART NUMBER IS OBSOLETE.

①	22.86 [.900]	-9	26.01 [1.024]	36.83 [1.450]	44.45 [1.750]	-30	2-533268-0
	81.28 [3.200]	32	84.43 [3.324]	95.25 [3.750]	102.87 [4.050]	99	1-533268-9
⑦	144.78 [5.700]	-57	147.93 [5.824]	158.75 [6.250]	166.37 [6.550]	-174	1-533268-8
⑦⑥	251.46 [9.900]	-99	254.61 [10.024]	265.43 [10.450]	273.05 [10.750]	-300	1-533268-7
⑦⑥	238.76 [9.400]	-94	241.91 [9.524]	252.73 [9.950]	260.35 [10.250]	-285	1-533268-6
⑥	226.06 [8.900]	89	229.21 [9.024]	240.03 [9.450]	247.65 [9.750]	270	1-533268-5
⑦⑥	213.36 [8.400]	-84	216.51 [8.524]	227.33 [8.950]	234.95 [9.250]	-255	1-533268-4
⑥	200.66 [7.900]	79	203.81 [8.024]	214.63 [8.450]	222.25 [8.750]	240	1-533268-3
	187.96 [7.400]	74	191.11 [7.524]	201.93 [7.950]	209.55 [8.250]	225	1-533268-2
	175.26 [6.900]	69	178.41 [7.024]	189.23 [7.450]	196.85 [7.750]	210	1-533268-1
	162.56 [6.400]	64	165.71 [6.524]	176.53 [6.950]	184.15 [7.250]	195	1-533268-0
	149.86 [5.900]	59	153.01 [6.024]	163.83 [6.450]	171.45 [6.750]	180	533268-9
	137.16 [5.400]	54	140.31 [5.524]	151.13 [5.950]	158.75 [6.250]	165	533268-8
	124.46 [4.900]	49	127.61 [5.024]	138.43 [5.450]	146.05 [5.750]	150	533268-7
	111.76 [4.400]	44	114.91 [4.524]	125.73 [4.950]	133.35 [5.250]	135	533268-6
	99.06 [3.900]	39	102.21 [4.024]	113.03 [4.450]	120.65 [4.750]	120	533268-5
	86.36 [3.400]	34	89.51 [3.524]	100.33 [3.950]	107.95 [4.250]	105	533268-4
	78.74 [3.100]	31	81.89 [3.224]	92.71 [3.650]	100.33 [3.950]	96	533268-3
	73.66 [2.900]	29	76.81 [3.024]	87.63 [3.450]	95.25 [3.750]	90	533268-2
	60.96 [2.400]	24	64.11 [2.524]	74.93 [2.950]	82.55 [3.250]	75	533268-1

E	D	C	B	A	POSN	PART NUMBER
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 3 PLC DEC ± 0.13 E.005] ANGLES ± -		DR 06/18/90 R.K. SEIFRIED CHK 10/6/92 G. SKIPPER APPD 10/6/92 G. SKIPPER APPD 10/6/92 G. SKIPPER		AMP AMP Incorporated Harrisburg, PA 17105-3508		
MATERIAL ① ②		PRODUCT SPEC -		NAME HDI, 3 ROW, RECEPTACLE ASSEMBLY, 3.05 [.120] LONG SOLDER TAILS, .00076 [.000030] GOLD PLATE		
FINISH ③		APPLICATION SPEC -		SIZE D	CAGE CODE 00779	DRAWING NO 533268
WEIGHT		SCALE 4:1		SHEET 2 OF 2		