

AMERICAN TECHNICAL CERAMICS

*QUICK
REFERENCE*

PRODUCT SELECTION GUIDE



 **THE
ENGINEERS'
CHOICE™**



Corporate Profile

American Technical Ceramics Corp. (ATC) provides component and custom integrated packaging solutions for the RF, microwave and telecommunications industries. For over forty years we have been "The Engineer's Choice®".

ATC designs, develops, manufactures and markets Multilayer Capacitors, Single Layer Capacitors, Resistor Products, Inductors and Custom Thin Film Products for RF, microwave and millimeter-wave applications. Our products are primarily used in: wireless communications infrastructure, fiber optics, medical electronics, semiconductor manufacturing equipment, defense, aerospace, and satellite communications markets.



▲ ATC's Jacksonville Facility occupies approximately 100,000 sq. ft.

◀ ATC's New York Facility occupies approximately 90,000 sq. ft.

As part of our globalization initiative ATC has a wholly-owned subsidiary for European Direct Sales, Applications Support and Distribution, located in Kungens Kurva, Sweden. The Company's wholly-owned subsidiary offering Technical Support for Asia is located in Shenzhen, P.R. China. ATC also has local offices in Holzkirchen, Germany, Guildford, England and Moscow, Russia.

RLC Products

- Multilayer Ceramic Capacitors
- Capacitor Assemblies for Power Applications
- Single Layer Ceramic Capacitors
- Resistor Products
- Inductor Products

Process and Packaging

- Thin Film Custom Products: metalization and patterned substrates for a broad range of hybrid circuit requirements

Markets Served

- Wireless / Telecom Base Stations
- Semiconductor Manufacturing Equipment
- Medical Diagnostic Equipment
- Sattelite Systems
- Public Safety Radio
- Avionic Systems
- Military and Aerospace
- Commerical Broadcast Transmitters
- Fiber Optic Communications
- Automotive Electronics

Facilities

- Huntington Station, New York – Sales, Applications Support, Manufacturing and Distribution Center
- Kungens Kurva, Sweden – European Operations and Distribution Center
- Jacksonville, Florida – Advanced Technology Center, Manufacturing Facility

ATC's Quick Reference Product Selection Guide is designed to help you navigate through our products and services. The following parameters, included in ATC's complete catalog, are highlights of each Product Series:

- Full electrical and mechanical specifications
- Power Handling Data
- Application Notes
- ESR, FSR, Q and TCC Performance Curves
- Design Software
- Thin Film Overview

Download complete pdf data sheets at www.atceramics.com

ATC's website includes a complete listing of technical articles in pdf format, as well as new product updates and design support software. As an added convenience, ATC Multilayer Capacitor Kits and Inductor Design Kits may be purchased online.



NOTE: Contact ATC's Applications Engineers for further technical information at (631) 622-4700. To receive a full catalog, contact any ATC representative or call the factory.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com

w w w . a t c e r a m i c s . c o m

ATC PRODUCTS BY FREQUENCY RANGE

► Frequency Range 1: Up to 30 MHz				
Typical Applications	Capacitor Products	Power Capacitor Assemblies	Resistive Products	Inductor Products
Low Frequency Communication Systems, Switch Mode Power Supplies, AM Broadcast, Semiconductor Fabrication, HF Amplifiers, Medical (MRI)	<ul style="list-style-type: none"> ► ATC 100 Series Porcelain MLCs ► ATC 700 Series NPO Porcelain and Ceramic MLCs ► ATC 200 Series BX Ceramic MLCs ► ATC 900 Series X7R Ceramic RF Power MLCs ► ATC 520 / 545 Series ► General Purpose ► CDR / QPL Approved MIL-PRF-55681 ► COTS 	<ul style="list-style-type: none"> ► Extended Capacitance Assemblies ► Extended Voltage & Current Assemblies ► Matched Sets ► Voltage Dividers 	<ul style="list-style-type: none"> ► Resistors ► Terminations: SMT, Chip Leaded & Flanged ► Attenuators ► Non-Magnetic Series CR, LR, FR 	<ul style="list-style-type: none"> ► WL Chip Inductors - EIA Sizes 0402 0603 0805 1008 1206

► Frequency Range 2: >30 MHz to 800 MHz				
Typical Applications	Capacitor Products	Power Capacitor Assemblies	Resistive Products	Inductor Products
Medical (MRI), Aircraft, Marine, Public Safety, Military	<ul style="list-style-type: none"> ► ATC 100 Series Porcelain MLCs ► ATC 700 Series NPO Porcelain and Ceramic MLCs ► ATC 800 Series NPO Ceramic MLCs ► ATC 200 Series BX Ceramic MLCs ► ATC 900 Series X7R Ceramic RF Power MLCs ► ATC 520 / 545 Series ► General Purpose ► CDR / QPL Approved MIL-PRF-55681 ► COTS 	<ul style="list-style-type: none"> ► Extended Capacitance Assemblies ► Extended Voltage & Current Assemblies ► Matched Sets ► Voltage Dividers 	<ul style="list-style-type: none"> ► Resistors ► Terminations: SMT Chip Leaded & Flanged ► Attenuators ► Non-Magnetic Series CR, LR, FR 	<ul style="list-style-type: none"> ► WL Chip Inductors - EIA Sizes 0402 0603 0805 1008 1206

► Frequency Range 3: >800 MHz to 3.5 GHz				
Typical Applications	Capacitor Products	Advanced Substrate Packaging	Resistive Products	Inductor Products
Wireless Infrastructure (Cellular / PCS / DCS / GPS / MMDS), Bluetooth, Wireless LAN (802.11)	<ul style="list-style-type: none"> ► ATC 100 Series Porcelain MLCs ► ATC 700 Series NPO Porcelain and Ceramic MLCs ► ATC 600 Series ► ATC 800 Series NPO Ceramic MLCs ► ATC 200 Series BX Ceramic MLCs ► SLC ► ATC 500 / 520 / 545 Series ► General Purpose ► CDR / QPL Approved MIL-PRF-55681 ► COTS 	<ul style="list-style-type: none"> ► Thin Film Circuit Fabrication Services 	<ul style="list-style-type: none"> ► Resistors ► Terminations: SMT Chip Leaded & Flanged ► Attenuators ► Non-Magnetic Series CR, LR, FR 	<ul style="list-style-type: none"> ► WL Chip Inductors - EIA Sizes 0402 0603 0805 1008 1206

► Frequency Range 4: >3.5 GHz to 100 GHz				
Typical Applications	Capacitor Products	Advanced Substrate Packaging	Resistive Products	Inductor Products
Satellite Communications, LMDS, Radar, High Speed Data	<ul style="list-style-type: none"> ► ATC 100 Series Porcelain MLCs ► ATC 700 Series NPO Porcelain and Ceramic MLCs ► ATC 600 Series ► ATC 800 Series NPO Ceramic MLCs ► SLC ► ATC 500 / 520 / 545 Series ► CDR / QPL Approved MIL-PRF-55681 ► COTS 	<ul style="list-style-type: none"> ► Thin Film Circuit Fabrication Services 	<ul style="list-style-type: none"> ► Resistors ► Terminations: SMT, Chip Leaded & Flanged ► Attenuators ► Non-Magnetic Series CR, LR, FR 	<ul style="list-style-type: none"> ► WL Chip Inductors - EIA Sizes 0402 0603 0805 1008 1206

A M E R I C A N T E C H N I C A L C E R A M I C S

► Frequency Range 1: Up to 30 MHz

RESISTORS (page 10)



ATC HIGH POWER RF RESISTIVE PRODUCTS

ATC's complete line of high power resistive products are designed and manufactured in our ISO-9001 registered facility. These products are manufactured with non-toxic, cost effective, aluminum nitride based substrates and qualified to Mil-PRF-55342, MIL-STD 202, and ANSI J-STD-002 specifications.

ATC high power resistive products are suitable for many wireless and satellite communication applications including GSM, PCS, W-CDMA, 3G, WCS, ISM and Wireless LAN. Other applications include medical, industrial, military and aerospace. Typical circuit applications are splitter-combiner networks, power amplifiers, synthesizers, MRI coils, isolators and circulators.

DC and RF Specifications:

- Resistance value: 50 and 100 standard (10 to 200 available)
- Terminations: Typical VSWR from 1.05:1 to 1.20:1
- Resistors: Low parasitic capacitance (See catalog)
- Temperature Coefficient of Resistance (TCR) <150ppm/ °C typical
- Operating temperature range: -55°C to +150°C

Mechanical Specifications:

- Substrate – Aluminum Nitride; Resistive Film – Tantalum Nitride; Terminals – Silver
- Flangeless and Flanged tabs – 100% silver leads; Covers – Alumina
- Copper flanges – Nickel or Silver plated
- Lead-Free, RoHS compliant

Non-magnetic products available

ATC RESISTOR SERIES

ATC CR Chip Resistors

- Power handling: 5 watts to 250 watts

ATC CS and CW Surface Mount Resistors

- Power handling: 2 watts to 40 watts

ATC LR Leaded Chip Resistors

- Power handling: 30 watts to 250 watts

ATC FR Flanged Resistors

- Power handling: 15 watts to 250 watts

ATC TERMINATION SERIES

ATC CT Series Chip Terminations

- Power handling: 5 watts to 225 watts

ATC CZ Series Surface Mount Terminations

- Power handling: 10 watts to 40 watts


ATC LT Series Leaded Terminations

- Power handling: 12 watts to 225 watts

ATC FT Series Flanged Terminations

- Power handling: 15 watts to 225 watts

INDUCTORS (page 11)

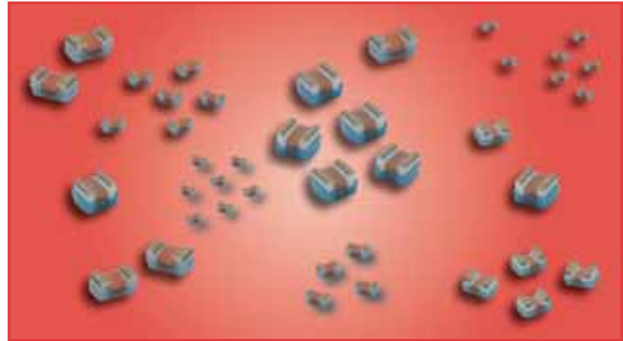

ATC WL SERIES INDUCTOR PRODUCTS

ATC introduces its new family of RF surface mount inductor components, intended to complement its high frequency ultra low ESR capacitor products. The WL Series wire wound chip inductor products have been designed to provide excellent performance at competitive prices.

This Series includes the most widely used traditional EIA case sizes – 0402, 0603, 0805, 1008, and 1206. With an inductance range of 1 nH to 15,000 nH, these products have an operating temperature of -40°C to +125°C and a temperature coefficient of inductance (TCL) of +25 to +125 ppm/°C typical from -40°C to +125°C.

The WL inductor product line is intended for RF and microwave applications and features high self-resonant frequencies (SRF), high Q, and low DC resistance. These products are manufactured on a rugged core made of high quality ceramic material that exhibits high Q at high operating frequencies.

The WL Series is especially attractive for all 800 MHz to 3.4 GHz wireless applications where cost and performance are major factors. These applications include but are not limited to: cellular base stations, broadband wireless services, point-to-point and point-to-multipoint radio as well as other RF and microwave telecommunications systems.

All WL Series inductor products are supplied in tape and reel (2000 to 4000 parts per reel depending on case size) as standard, making them ideal for automated pick and place manufacturing applications. The terminations consist of a barrier layer with a lead-free tin-plated finish that exhibits excellent solderability for trouble-free attachments.

ATC WL (size = 0402)

- Inductance Range: 1.0 nH @ 250 MHz to 56 nH @ 250 MHz
- Tolerances: J (±5%), K (±10%)

ATC WL (size = 0603)

- Inductance Range: 1.6 nH @ 250 MHz to 390 nH @ 100 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 0805)

- Inductance Range: 3.3 nH @ 250 MHz to 2700 nH @ 25 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1008)

- Inductance Range: 4.7 nH @ 50 MHz to 15,000 nH @ 7.9 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1206)

- Inductance Range: 6.8 nH @ 100 MHz to 1200 nH @ 35 MHz
- Tolerances: J (±5%), K (±10%)

ATC MILLIMETER-WAVE / BROADBAND / ULTRA-BROADBAND SURFACE MOUNT CAPACITORS

ATC 520 L Series Broadband Capacitors


- 160 KHz to 16 GHz

ATC 545 L Series UBC™ Ultra-Broadband Capacitors

- 16 KHz to 40+ GHz

► Frequency Range 1: Up to 30 MHz

CAPACITORS (page 12, 13,14)

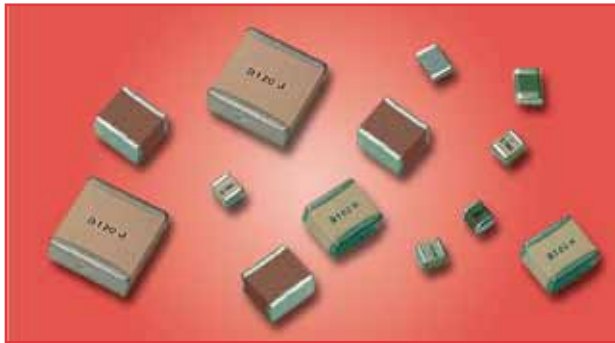

ATC 100 SERIES PORCELAIN SUPERCHIP® MLCS

These capacitors feature High Q, low ESR / ESL, ultra-stable performance, low noise, high self-resonance and established reliability (OPL).

Non-magnetic products available
RoHS compliant terminations are standard.
Refer to data sheets for other styles.

ATC 100 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 1000 pF
- Available with encapsulation option for leaded styles only

ATC 100 C (size = .250" x .250")

- Capacitance Range 1 pF to 2700 pF
- High RF Current/Voltage

ATC 100 E (size = .380" x .380")

- Capacitance Range 1 pF to 5100 pF
- High RF Power
- Extended WVDC up to 7200 VDC
- High RF Current/Voltage
- High Reliability

ATC 700 SERIES NPO PORCELAIN AND CERAMIC MLCS

This series features low ESR / ESL, low noise, ultra-stable NPO performance, high self-resonance and rugged construction. They meet established reliability standards. These capacitors are available with encapsulation option for leaded styles only.

ATC 700 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 5100 pF

ATC 700 C (size = .250" x .250")

- Capacitance Range 1 pF to 2700 pF

ATC 700 E (size = .380" x .380")

- Capacitance Range 1 pF to 2200 pF

ATC 200 SERIES BX CERAMIC MLCS

This series features low ESR / ESL, rugged construction and high reliability.

ATC 200 A (size = .055" x .055")

- Capacitance Range 510 pF to 0.01 μF

ATC 200 B (size = .110" x .110")

- Capacitance Range 5000 pF to 0.1 μF
- Available with encapsulation option for leaded styles only

ATC 900 SERIES X7R CERAMIC RF POWER MLCS

This series features low ESR/ESL, rugged construction, a mid-K, X7R dielectric, and high reliability.

ATC 900 C (size = .250" x .250")

- Capacitance Range 0.01 μF to 1 μF
- Available with encapsulation option for leaded styles only

ATC GENERAL PURPOSE MLC CAPACITORS FOR SURFACE MOUNT APPLICATIONS

ATC provides low cost general purpose capacitors which are not intended for precision designs but are suitable for many applications including DC blocking, coupling, bypassing, and filtering. Available in standard EIA case sizes.


ATC MILITARY (CDR) PRODUCTS

ATC is a QPL approved supplier for MIL-PRF-55681/4 and /5 fixed, multilayer, unencapsulated, monolithic porcelain and ceramic dielectric capacitors.

ATC COTS (COMMERCIAL OFF THE SHELF) PRODUCTS

Cost-effective upscreening of standard products for enhanced reliability applications.

POWER CAPACITOR ASSEMBLIES (page 15)

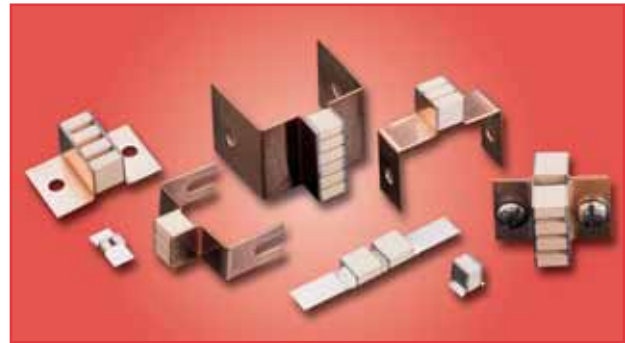

ATC POWER CAPACITOR ASSEMBLIES

ATC power capacitor assemblies are manufactured to customer specifications using ATC's proven standard products. Benefits include:

Reduced Assembly Steps / Handling Costs: Combinations of capacitors pre-packaged in manageable mechanical configurations for customer specific "drop-in" applications.

Enhanced Reliability: Overall elements and assemblies are 100% pre-tested to customer's electrical requirements: – Capacitance – Q – IR – DWV (to 10kV max). Elements are 100% ESR tested.

Reduced Purchasing Logistics: Reduced inventory requirements in matched assemblies. This eliminates excess, wasted parts.

Reduced Technical Labor: Alleviate need for engineering and technician resources in selecting electrically matched elements.

Guaranteed Performance: ATC guarantees electrical / mechanical performance on an assembly level every time.

Achieve Non-Standard Values and Ultra-Tight Tolerances:

ATC will "mix and match" values from our extensive inventory via computer matching programs to achieve any capacitor value specified by the designer.

Non-magnetic products available

ATC Parallel Assemblies: Extended capacitance

Standard Designs	B Case	C Case	E Case
No. of caps	2	2 - 6	2 - 8
Lead Type	L Bracket	L Bracket	L Bracket
Lead Material	Silver	Silver	Silver or Copper
Lead Thickness	.004 or .010 (0.10 or 0.25)*	.004 or .010 (0.10 or 0.25)*	.010 or .020 (0.25 or 0.51)*
Lead Length (max.)	0.5 (12.7)*	0.75 (19.1)*	2.0 (50.8)*
No. of holes (max.)	None	1 per lead	1 per lead
Mtg. Configuration	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical
Capacitor Spacer (typ.)	.050 or .070 (1.27 or 1.78)*	.050 or .070 (1.27 or 1.78)*	.090 (2.29)*

*inches (mm)

ATC Series Assemblies: Extended voltage

Standard Designs	C Case	E Case
No. of caps	2 - 3	2 - 3
Lead Type	L Bracket	L Bracket
Lead Material	Silver	Silver
Lead Thickness	.010*	.010*
Lead Length (max.)	0.75 (19.1)*	1.0 (25.4)*
No. of holes (max.)	1 per lead	1 per lead
Mtg. Configuration	Horizontal	Horizontal
Capacitor Spacer (typ.)	.050 (1.27)*	.050 (1.27)*

*inches (mm)

Matched Sets: Series or Parallel configurations for non-standard values or very close tolerance capacitance values.

Voltage Dividers: based on capacitive reactance, provided to customers' specific capacitance ratio.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

631-622-4700 • sales@atceramics.com

ATC Europe

+46 8 6800410 • sales@atceramics-europe.com

ATC Asia

+86-755-8366-4318 • sales@atceramics-asia.com

► Frequency Range 2: >30 MHz to 800 MHz

RESISTORS (page 10)



ATC HIGH POWER RF RESISTIVE PRODUCTS

ATC's complete line of high power resistive products are designed and manufactured in our ISO-9001 registered facility. These products are manufactured with non-toxic, cost effective, aluminum nitride base substrates and qualified to MIL-PRF-55342, MIL-STD 202, and ANSI J-STD-002 specifications.

ATC high power resistive products are suitable for many wireless and satellite communication applications including GSM, PCS, W-CDMA, 3G, WCS, ISM and Wireless LAN. Other applications include medical, industrial, military and aerospace. Typical circuit applications are splitter-combiner networks, power amplifiers, synthesizers, MRI coils, isolators and circulators.

DC and RF Specifications:

- Resistance value: 50 and 100 standard (10 to 200 available)
- Terminations: Typical VSWR from 1.05:1 to 1.20:1
- Resistors: Low parasitic capacitance (See catalog)
- Temperature Coefficient of Resistance (TCR) <150ppm/°C typical
- Operating temperature range: -55°C to +150°C

Mechanical Specifications:

- Substrate – Aluminum Nitride; Resistive Film – Tantalum Nitride; Terminals – Silver
- Flangeless and Flanged tabs – 100% silver leads; Covers – Alumina
- Copper flanges – Nickel or Silver plated
- Lead-Free, RoHS compliant

Non-magnetic products available

ATC RESISTOR SERIES

ATC CR Chip Resistors

- Power handling: 5 watts to 250 watts

ATC CS and CW Surface Mount Resistors

- Power handling: 2 watts to 40 watts

ATC LR Leaded Chip Resistors

- Power handling: 30 watts to 250 watts

ATC FR Flanged Resistors

- Power handling: 15 watts to 250 watts

ATC TERMINATION SERIES

ATC CT Series Chip Terminations

- Power handling: 5 watts to 225 watts

ATC CZ Series Surface Mount Terminations

- Power handling: 10 watts to 40 watts

ATC LT Series Leaded Terminations

- Power handling: 12 watts to 225 watts

ATC FT Series Flanged Terminations

- Power handling: 15 watts to 225 watts

ATC ATTENUATOR SERIES

ATC CA Series Chip Attenuators

- Power handling: up to 100 watts


ATC LA Series Leaded Attenuators

- Power handling: up to 100 watts

ATC FA Series Flanged Attenuators

- Power handling: up to 100 watts

INDUCTORS (page 11)

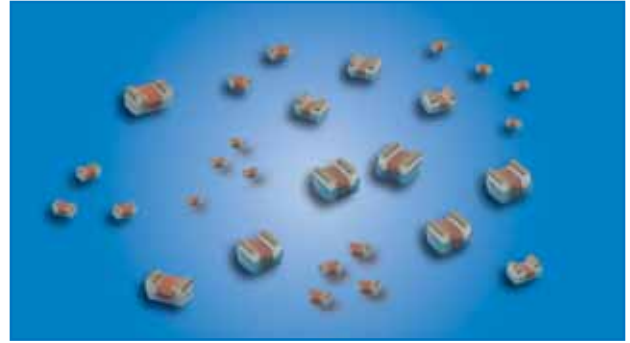

ATC WL SERIES INDUCTOR PRODUCTS

ATC introduces its new family of RF surface mount inductor components, intended to complement its high frequency ultra low ESR capacitors products. The WL Series wire wound chip inductor products have been designed to provide excellent performance at competitive prices.

This Series includes the most widely used traditional EIA case sizes – 0402, 0603, 0805, 1008, and 1206. With an inductance range of 1 nH to 15,000 nH, these products have an operating temperature of -40°C to +125°C and a temperature coefficient of inductance (TCL) of +25 to +125 ppm/°C typical from -40°C to +125°C.

The WL inductor product line is intended for RF and microwave applications and features high self-resonant frequencies (SRF), high Q, and low DC resistance. These products are manufactured on a rugged core made of high quality ceramic material that exhibits high Q at high operating frequencies.

The WL Series is especially attractive for all 800 MHz to 3.4 GHz wireless applications where cost and performance are major factors. These applications include but are not limited to: cellular base stations, broadband wireless services, point-to-point and point-to-multipoint radio as well as other RF and microwave telecommunications systems.

All WL Series inductor products are supplied in tape and reel (2000 to 4000 parts per reel depending on case size) as standard, making them ideal for automated pick and place manufacturing applications. The terminations consist of a barrier layer with a lead-free tin-plated finish that exhibits excellent solderability for trouble-free attachments.

ATC WL (size = 0402)

- Inductance Range: 1.0 nH @ 250 MHz to 56 nH @ 250 MHz
- Tolerances: J (±5%), K (±10%)

ATC WL (size = 0603)

- Inductance Range: 1.6 nH @ 250 MHz to 390 nH @ 100 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 0805)

- Inductance Range: 3.3 nH @ 250 MHz to 2700 nH @ 25 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1008)

- Inductance Range: 4.7 nH @ 50 MHz to 15,000 nH @ 7.9 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1206)

- Inductance Range: 6.8 nH @ 100 MHz to 1200 nH @ 35 MHz
- Tolerances: J (±5%), K (±10%)

ATC MILLIMETER-WAVE / BROADBAND / ULTRA-BROADBAND SURFACE MOUNT CAPACITORS

ATC 520 L Series Broadband Capacitors

- 160 KHz to 16 GHz

ATC 545 L Series UBC™ Ultra-Broadband Capacitors


- 16 KHz to 40+ GHz

ATC GENERAL PURPOSE MLC SURFACE MOUNT CAPACITORS

Low cost general purpose capacitors, not intended for precision designs but suitable for many applications including DC blocking, coupling, bypassing, and filtering. This offering consists of a variety of dielectric types from the most stable NPO to high K versions for maximum capacitance. Available in standard EIA case sizes.

► Frequency Range 2: >30 MHz to 800 MHz

CAPACITORS (page 12, 13,14)

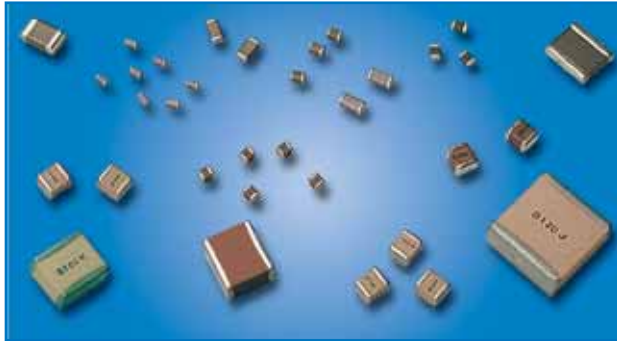

ATC 100 SERIES PORCELAIN SUPERCHIP® MLCs
 These capacitors feature High Q, low ESR / ESL and ultra-stable performance. They are available with an encapsulation option as noted below.

Non-magnetic products available
RoHS compliant terminations are standard.
Refer to data sheets for other styles.

ATC 100 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 1000 pF
- Available with encapsulation option for leaded styles only

ATC 100 C (size = .250" x .250")

- Capacitance Range 1 pF to 2700 pF • High RF Current/Voltage

ATC 100 E (size = .380" x .380")

- Capacitance Range 1 pF to 5100 pF • High RF Current/Voltage
- High RF Power • High Reliability

ATC 700 SERIES NPO PORCELAIN AND CERAMIC MLCs

This series features low ESR / ESL, low noise, ultra-stable NPO performance, high self-resonance and rugged construction. They meet established reliability standards. These capacitors are available with encapsulation option for leaded styles only.

ATC 700 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 5100 pF

ATC 700 C (size = .250" x .250")

- Capacitance Range 1 pF to 2700 pF

ATC 700 E (size = .380" x .380")

- Capacitance Range 1 pF to 2200 pF

ATC 800 SERIES NPO CERAMIC HIGH RF POWER MLCs

Advantages of these MLCs include optimized form factor, lowest ESR at wireless frequencies, highest self resonance and superior thermal performance.

ATC 800 A (size = .055" x .055")

- Capacitance Range 0.1 pF to 100 pF

ATC 800 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 1000 pF

ATC 200 SERIES BX CERAMIC MLCs

This series features low ESR / ESL, rugged construction and high reliability.

ATC 200 A (size = .055" x .055")

- Capacitance Range 510 pF to 0.01 μF

ATC 200 B (size = .110" x .110")

- Capacitance Range 5000 pF to 0.1 μF
- Available with encapsulation option for leaded styles only

ATC 900 SERIES X7R CERAMIC RF POWER MLCs

This series features low ESR/ESL, rugged construction, a mid-K, X7R dielectric, and high reliability.

ATC 900 C (size = .250" x .250")

- Capacitance Range 0.01 μF to 1 μF
- Available with encapsulation option for leaded styles only


ATC MILITARY (CDR) PRODUCTS

ATC is a QPL approved supplier for MIL-PRF-55681/4 and /5 fixed, multilayer, unencapsulated, monolithic porcelain and ceramic dielectric capacitors.

ATC COTS (COMMERCIAL OFF THE SHELF) PRODUCTS

Cost-effective upscreening of standard products for enhanced reliability applications.

POWER CAPACITOR ASSEMBLIES (page 15)

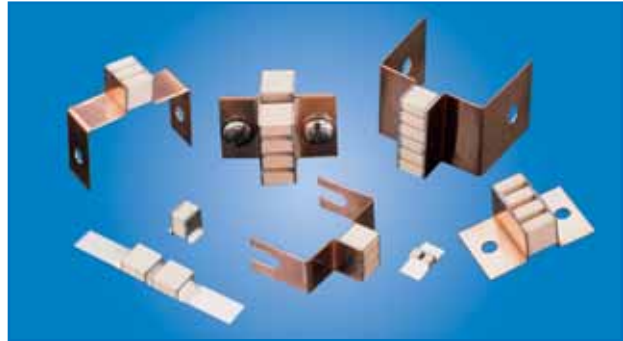

ATC POWER CAPACITOR ASSEMBLIES

ATC power capacitor assemblies are manufactured to customer specifications using ATC's proven standard products. Benefits include:

Reduced Assembly Steps / Handling Costs: Combinations of capacitors pre-packaged in manageable mechanical configurations for customer specific "drop-in" applications.

Enhanced Reliability: Overall elements and assemblies are 100% pre-tested to customer's electrical requirements: – Capacitance – Q – IR – DWV (to 10kV max). Elements are 100% ESR tested.

Reduced Purchasing Logistics: Reduced inventory requirements in matched assemblies. This eliminates excess, wasted parts.

Reduced Technical Labor: Alleviate need for engineering and technician resources in selecting electrically matched elements.

Guaranteed Performance: ATC guarantees electrical / mechanical performance on an assembly level every time.

Achieve Non-Standard Values and Ultra-Tight Tolerances:

ATC will "mix and match" values from our extensive inventory via computer matching programs to achieve any capacitor value specified by the designer.

Non-magnetic products available

ATC Parallel Assemblies: Extended capacitance

Standard Designs	B Case	C Case	E Case
No. of caps	2	2 - 6	2 - 8
Lead Type	L Bracket	L Bracket	L Bracket
Lead Material	Silver	Silver	Silver or Copper
Lead Thickness	.004 or .010 (0.10 or 0.25)*	.004 or .010 (0.10 or 0.25)*	.010 or .020 (0.25 or 0.51)*
Lead Length (max.)	0.5 (12.7)*	0.75 (19.1)*	2.0 (50.8)*
No. of holes (max.)	None	1 per lead	1 per lead
Mtg. Configuration	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical
Capacitor Spacer (typ.)	.050 or .070 (1.27 or 1.78)*	.050 or .070 (1.27 or 1.78)*	.090 (2.29)*

*inches (mm)

ATC Series Assemblies: Extended voltage

Standard Designs	C Case	E Case
No. of caps	2 - 3	2 - 3
Lead Type	L Bracket	L Bracket
Lead Material	Silver	Silver
Lead Thickness	.010*	.010*
Lead Length (max.)	0.75 (19.1)*	1.0 (25.4)*
No. of holes (max.)	1 per lead	1 per lead
Mtg. Configuration	Horizontal	Horizontal
Capacitor Spacer (typ.)	.050 (1.27)*	.050 (1.27)*

*inches (mm)

Matched Sets: Series or Parallel configurations for non-standard values or very close tolerance capacitance values.

Voltage Dividers: based on capacitive reactance, provided to customers' specific capacitance ratio.

Frequency Range 2:
>30 MHz to 800 MHz

► Frequency Range 3: >800 MHz to 3.5 GHz

RESISTORS (page 10)



ATC HIGH POWER RF RESISTIVE PRODUCTS

ATC's complete line of high power resistive products are designed and manufactured in our ISO-9001 registered facility. These products are manufactured with non-toxic, cost effective, aluminum nitride base substrates and qualified to Mil-PRF-55342, MIL-STD 202, and ANSI J-STD-002 specifications.

ATC high power resistive products are suitable for many wireless and satellite communication applications including GSM, PCS, W-CDMA, 3G, WCS, ISM and Wireless LAN. Other applications include medical, industrial, military and aerospace. Typical circuit applications are splitter-combiner networks, power amplifiers, synthesizers, MRI coils, isolators and circulators.

DC and RF Specifications:

- Resistance value: 50 and 100 standard (10 to 200 available)
- Terminations: Typical VSWR from 1.05:1 to 1.20:1
- Resistors: Low parasitic capacitance (See catalog)
- Temperature Coefficient of Resistance (TCR) <150ppm/°C typical
- Operating temperature range: -55°C to +150°C

Mechanical Specifications:

- Substrate – Aluminum Nitride; Resistive Film – Tantalum Nitride; Terminals – Silver
- Flangeless and Flanged tabs – 100% silver leads; Covers – Alumina
- Copper flanges – Nickel or Silver plated
- Lead-Free, RoHS compliant

Non-magnetic products available

ATC RESISTOR SERIES

ATC CR Chip Resistors

- Power handling: 5 watts to 250 watts

ATC CS and CW Surface Mount Resistors

- Power handling: 2 watts to 40 watts

ATC LR Leaded Chip Resistors

- Power handling: 30 watts to 250 watts

ATC FR Flanged Resistors

- Power handling: 15 watts to 250 watts

ATC TERMINATION SERIES

ATC CT Series Chip Terminations

- Power handling: 5 watts to 225 watts

ATC CZ Series Surface Mount Terminations

- Power handling: 10 watts to 40 watts

ATC LT Series Leaded Terminations

- Power handling: 12 watts to 225 watts

ATC FT Series Flanged Terminations

- Power handling: 15 watts to 225 watts

ATC ATTENUATOR SERIES

ATC CA Series Chip Attenuators

- Power handling: up to 100 watts


ATC LA Series Leaded Attenuators

- Power handling: up to 100 watts

ATC FA Series Flanged Attenuators

- Power handling: up to 100 watts

INDUCTORS (page 11)

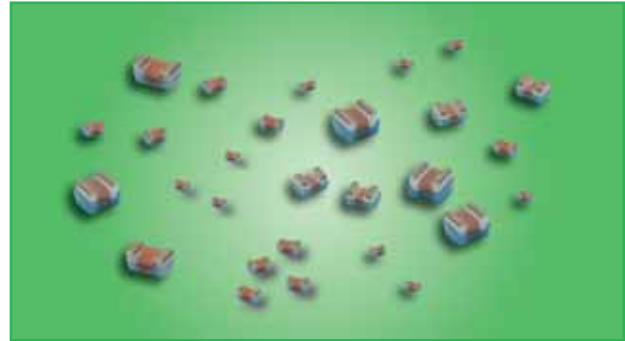

ATC WL SERIES INDUCTOR PRODUCTS

ATC introduces its new family of RF surface mount inductor components, intended to complement its high frequency ultra low ESR capacitor products. The WL Series wire wound chip inductor products have been designed to provide excellent performance at competitive prices.

This Series includes the most widely used traditional EIA case sizes – 0402, 0603, 0805, 1008, and 1206. With an inductance range of 1 nH to 15,000 nH, these products have an operating temperature of -40°C to +125°C and a temperature coefficient of inductance (TCL) of +25 to +125 ppm/°C typical from -40°C to +125°C.

The WL inductor product line is intended for RF and microwave applications and features high self-resonant frequencies (SRF), high Q, and low DC resistance. These products are manufactured on a rugged core made of high quality ceramic material that exhibits high Q at high operating frequencies.

The WL Series is especially attractive for all 800 MHz to 3.4 GHz wireless applications where cost and performance are major factors. These applications include but are not limited to: cellular base stations, broadband wireless services, point-to-point and point-to-multipoint radio as well as other RF and microwave telecommunications systems.

All WL Series inductor products are supplied in tape and reel (2000 to 4000 parts per reel depending on case size) as standard, making them ideal for automated pick and place manufacturing applications. The terminations consist of a barrier layer with a lead-free tin-plated finish that exhibits excellent solderability for trouble-free attachments.

ATC WL (size = 0402)

- Inductance Range: 1.0 nH @ 250 MHz to 56 nH @ 250 MHz
- Tolerances: J (±5%), K (±10%)

ATC WL (size = 0603)

- Inductance Range: 1.6 nH @ 250 MHz to 390 nH @ 100 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 0805)

- Inductance Range: 3.3 nH @ 250 MHz to 2700 nH @ 25 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1008)

- Inductance Range: 4.7 nH @ 50 MHz to 15,000 nH @ 7.9 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1206)

- Inductance Range: 6.8 nH @ 100 MHz to 1200 nH @ 35 MHz
- Tolerances: J (±5%), K (±10%)

ATC MILLIMETER-WAVE / BROADBAND / ULTRA-BROADBAND SURFACE MOUNT CAPACITORS

ATC 500 S Series Millimeter-Wave Capacitors

- Low insertion loss and ultra-high self resonance surface mount millimeter-wave capacitors

ATC 520 L Series Broadband Capacitors

- 160 KHz to 16 GHz

ATC 545 L Series UBC™ Ultra-Broadband Capacitors


- 16 KHz to 40+ GHz

ATC GENERAL PURPOSE MLC SURFACE MOUNT CAPACITORS

Low cost general purpose capacitors, not intended for precision designs but suitable for many applications including DC blocking, coupling, bypassing, and filtering. This offering consists of a variety of dielectric types from the most stable NPO to high K versions for maximum capacitance. Available in standard EIA case sizes.

► Frequency Range 3: >800 MHz to 3.5 GHz

CAPACITORS (page 12, 13, 14)

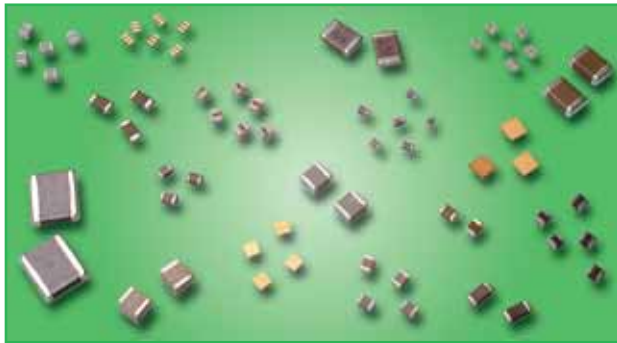

ATC 100 SERIES PORCELAIN SUPERCHIP® MLCS

These capacitors feature High Q, low ESR / ESL, ultra-stable performance, low noise, high self-resonance and established reliability (QPL).

Non-magnetic products available
RoHS compliant terminations are standard.
Refer to data sheets for other styles.

ATC 100 A (size = .055" x .055")

- Capacitance Range 0.1 pF to 100 pF

ATC 100 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 1000 pF
- Available with encapsulation option for leaded styles only

ATC 700 SERIES NPO PORCELAIN AND CERAMIC MLCS

This series features low ESR / ESL, low noise, ultra-stable NPO performance, high self-resonance and rugged construction. They meet established reliability standards.

ATC 700 A (size = .055" X .055")

- Capacitance Range 0.1 pF to 1000 pF

ATC 700 B (size = .110" X .110")

- Capacitance Range 0.1 pF to 5100 pF
- Available with encapsulation option for leaded styles only

ATC 600 SERIES ULTRA-LOW ESR HIGH Q MICROWAVE CAPACITORS

Feature ultra-low ESR and high self-resonance. Environmentally safe terminations meet or exceed MIL-PRF-55681. Operating temperature is -55°C to +125°C

ATC 600 L (size = 0402)

- Capacitance Range 0.1 pF to 27 pF
- Voltage Rating: 200 WVDC

ATC 600 S (size = 0603)

- Capacitance Range 0.1 pF to 100 pF
- Voltage Rating: 250 WVDC

ATC 600 F (size = 0805)

- Capacitance Range 0.1 pF to 240 pF
- Voltage Rating: 250 WVDC

ATC 800 SERIES NPO CERAMIC HIGH RF POWER MLCS

Advantages of these MLCs include optimized form factor, lowest ESR at wireless frequencies, highest self resonance and superior thermal performance.

ATC 800 A (size = .055" x .055")

- Capacitance Range 0.1 pF to 100 pF

ATC 800 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 1000 pF

ATC SINGLE LAYER CAPACITORS

For applications with operating frequencies up to 100 GHz. Capacitance range 0.04 pF to 10,000 pF, case sizes from 10 mils to 90 mils. "Design your own" option (custom sizes.)


ATC MILITARY (CDR) PRODUCTS

ATC is a QPL approved supplier for MIL-PRF-55681/4 and /5 fixed, multilayer, unencapsulated, monolithic porcelain and ceramic dielectric capacitors.

ATC COTS (COMMERCIAL OFF THE SHELF) PRODUCTS

Cost-effective upscreening of standard products for enhanced reliability applications.

THIN FILM (page 16, 17)

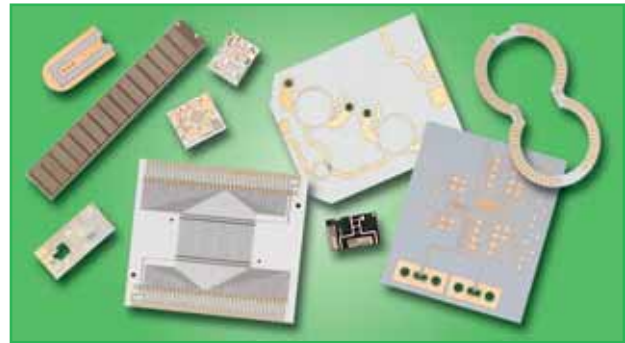

ATC CUSTOM THIN FILM PRODUCTS

ATC Custom Thin Film Products are manufactured to customer requirements for applications that include microwave/millimeter-wave, fiber optics and high-rel.

ATC brings a new standard of responsiveness and quality to thin film technology products. Custom metalization and patterned substrates are offered to address a broad spectrum of deposition and hybrid circuit fabrication requirements.

Custom metalization consists of sputtered and electroplated coatings made to specifications. Products may include via holes and odd shaped substrates in a wide choice of ceramics and dielectric materials. Three target, batch sputtering systems with load-locks are utilized for producing the most consistent film quality.

- Full in-house capability to support prototyping to large scale production
- Photolithography Sputtering, Electroplating, Laser Trimming, Laser Machining
- Custom metalization and patterned substrates
- Conductors, Resistors, Via Holes, Air Bridges, Crossovers, Wraparounds, Solder Dams

Typical Hybrid Circuit Applications

CIRCUIT TYPE	APPLICATION	SUBSTRATE
Conductor	High Density Interconnection Laser Diode Mount Power Supply	Alumina Beryllia
Resistor	D/A-A/D Converter Power Supply Resistor Network	Alumina Beryllia
Microwave	Attenuator Filter Amplifier Power Divider Capacitor Antenna	Alumina Beryllia Ferrite Quartz Other Dielectrics

Frequency Range 3:
>800 MHz to 3.5 GHz

► Frequency Range 4: >3.5 GHz to 100 GHz

RESISTORS (page 10)



ATC HIGH POWER RF RESISTIVE PRODUCTS

ATC's complete line of high power resistive products are designed and manufactured in our ISO-9001 registered facility. These products are manufactured with non-toxic, cost effective, aluminum nitride base substrates and qualified to Mil-PRF-55342, MIL-STD 202, and ANSI J-STD-002 specifications.

ATC high power resistive products are suitable for many wireless and satellite communication applications including GSM, PCS, W-CDMA, 3G, WCS, ISM and Wireless LAN. Other applications include medical, industrial, military and aerospace applications. Typical circuit applications are splitter-combiner networks, power amplifiers, synthesizers, MRI coils, isolators and circulators.

DC and RF Specifications:

- Resistance value: 50 and 100 standard (10 to 200 available)
- Terminations: Typical VSWR from 1.05:1 to 1.20:1
- Resistors: Low parasitic capacitance (See catalog)
- Temperature Coefficient of Resistance (TCR) <150ppm/°C typical
- Operating temperature range: -55°C to +150°C

Mechanical Specifications:

- Substrate – Aluminum Nitride; Resistive Film – Tantalum Nitride; Terminals – Silver
- Flangeless and Flanged tabs – 100% silver leads; Covers – Alumina
- Copper flanges – Nickel or Silver plated
- Lead-Free, RoHS compliant

Non-magnetic products available

ATC RESISTOR SERIES

ATC CR Chip Resistors

- Power handling: 5 watts to 250 watts

ATC CS and CW Surface Mount Resistors

- Power handling: 2 watts to 40 watts

ATC LR Leaded Chip Resistors

- Power handling: 30 watts to 250 watts

ATC FR Flanged Resistors

- Power handling: 15 watts to 250 watts

ATC TERMINATION SERIES

ATC CT Series Chip Terminations

- Power handling: 5 watts to 225 watts

ATC CZ Series Surface Mount Terminations

- Power handling: 10 watts to 40 watts

ATC LT Series Leaded Terminations

- Power handling: 12 watts to 225 watts

ATC FT Series Flanged Terminations

- Power handling: 15 watts to 225 watts

ATC ATTENUATOR SERIES

ATC CA Series Chip Attenuators

- Power handling: up to 100 watts

ATC LA Series Leaded Attenuators

- Power handling: up to 100 watts

ATC FA Series Flanged Attenuators

- Power handling: up to 100 watts

INDUCTORS (page 11)



ATC WL SERIES INDUCTOR PRODUCTS

ATC introduces its new family of RF surface mount inductor components, ATC introduces its new family of RF surface mount inductor components, intended to complement its high frequency ultra low ESR capacitor products. The WL Series wire wound chip inductor products have been designed to provide excellent performance at competitive prices.

his Series includes the most widely used traditional EIA case sizes – 0402, 0603, 0805, 1008, and 1206. With an inductance range of 1 nH to 15,000 nH, these products have an operating temperature of -40°C to +125°C and a temperature coefficient of inductance (TCL) of +25 to +125 ppm/°C typical from -40°C to +125°C.

The WL inductor product line is intended for RF and microwave applications and features high self-resonant frequencies (SRF), high Q, and low DC resistance. These products are manufactured on a rugged core made of high quality ceramic material that exhibits high Q at high operating frequencies.

The WL Series is especially attractive for all 800 MHz to 3.4 GHz wireless applications where cost and performance are major factors. These applications include but are not limited to: cellular base stations, broadband wireless services, point-to-point and point-to-multipoint radio as well as other RF and microwave telecommunications systems.

All WL Series inductor products are supplied in tape and reel (2000 to 4000 parts per reel depending on case size) as standard, making them ideal for automated pick and place manufacturing applications. The terminations consist of a barrier layer with a lead-free tin-plated finish that exhibits excellent solderability for trouble-free attachments.

ATC WL (size = 0402)

- Inductance Range: 1.0 nH @ 250 MHz to 56 nH @ 250 MHz
- Tolerances: J (±5%), K (±10%)

ATC WL (size = 0603)

- Inductance Range: 1.6 nH @ 250 MHz to 390 nH @ 100 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 0805)

- Inductance Range: 3.3 nH @ 250 MHz to 2700 nH @ 25 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1008)

- Inductance Range: 4.7 nH @ 50 MHz to 15,000 nH @ 7.9 MHz
- Tolerances: G (±2%), J (±5%), K (±10%)

ATC WL (size = 1206)

- Inductance Range: 6.8 nH @ 100 MHz to 1200 nH @ 35 MHz
- Tolerances: J (±5%), K (±10%)

ATC MILLIMETER-WAVE / BROADBAND / ULTRA-BROADBAND SURFACE MOUNT CAPACITORS

ATC 500 S Series Millimeter-Wave Capacitors

- Low insertion loss and ultra-high self resonance surface mount millimeter-wave capacitors

ATC 520 L Series Broadband Capacitors

- 160 KHz to 16 GHz

ATC 545 L Series UBC™ Ultra-Broadband Capacitors

- 16 KHz to 40+ GHz

► Frequency Range 4: >3.5 GHz to 100 GHz

CAPACITORS (page 12, 13, 14)



ATC 100 SERIES PORCELAIN SUPERCHIP® MLCS

These capacitors feature High Q, low ESR / ESL and ultra-stable performance. They are available with an encapsulation option as noted below.

ATC 100 A (size = .055" x .055")

- Capacitance Range 0.1 pF to 100 pF

Non-magnetic products available

RoHS compliant terminations are standard.

Refer to data sheets for other styles.

ATC 700 SERIES NPO PORCELAIN AND CERAMIC MLCS

This series features low ESR / ESL, low noise, ultra-stable NPO performance, high self-resonance and rugged construction. Meets established reliability standards.

ATC 700 A (size = .055" X .055")

- Capacitance Range 0.1 pF to 1000 pF

ATC 600 SERIES ULTRA-LOW ESR HIGH Q MICROWAVE CAPACITORS

Feature ultra-low ESR and high self-resonance. Environmentally safe terminations meet or exceed MIL-PRF-55681. Operating temperature is -55°C to +125°C

ATC 600 L (size = 0402)

- Capacitance Range 0.1 pF to 27 pF

ATC 600 S (size = 0603)

- Capacitance Range 0.1 pF to 100 pF
- Voltage Rating: 250 WVDC

ATC 600 F (size = 0805)

- Capacitance Range 0.1 pF to 240 pF
- Voltage Rating: 250 WVDC

ATC 800 SERIES NPO CERAMIC HIGH RF POWER MLCS

Advantages of these MLCs include optimized form factor, lowest ESR at wireless frequencies, highest self resonance and superior thermal performance.

ATC 800 A (size = .055" x .055")

- Capacitance Range 0.1 pF to 100 pF

ATC 800 B (size = .110" x .110")

- Capacitance Range 0.1 pF to 1000 pF

ATC SINGLE LAYER CAPACITORS

For applications with operating frequencies up to 100 GHz Capacitance range 0.03 pF to 6200 pF, case sizes from 10 mils to 90 mils. "Design your own" option (custom sizes.)


ATC MILITARY (CDR) PRODUCTS

ATC is a QPL approved supplier for MIL-PRF-55681/4 and /5 fixed, multilayer, unencapsulated, monolithic porcelain and ceramic dielectric capacitors.

ATC COTS (COMMERCIAL OFF THE SHELF) PRODUCTS

Cost-effective upscreening of standard products for enhanced reliability applications.

THIN FILM (PAGE 16, 17)

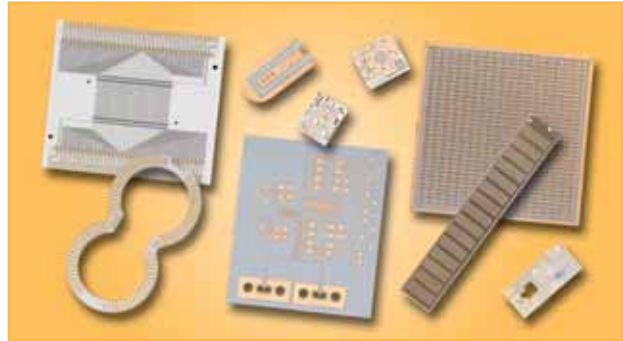

ATC CUSTOM THIN FILM PRODUCTS

ATC Custom Thin Film Products are manufactured to customer requirements for applications that include microwave/millimeter-wave, fiber optics and high-rel.

ATC brings a new standard of responsiveness and quality to thin film technology products. Custom metalization and patterned substrates are offered to address a broad spectrum of deposition and hybrid circuit fabrication requirements.

Custom metalization consists of sputtered and electroplated coatings made to specifications. Products may include via holes and odd shaped substrates in a wide choice of ceramics and dielectric materials. Three target, batch sputtering systems with load-locks are utilized for producing the most consistent film quality.

- Full in-house capability to support prototyping to large scale production
- Photolithography Sputtering, Electroplating, Laser Trimming, Laser Machining
- Custom metalization and patterned substrates
- Conductors, Resistors, Via Holes, Air Bridges, Crossovers, Wraparounds, Solder Dams

Typical Hybrid Circuit Applications

CIRCUIT TYPE	APPLICATION	SUBSTRATE
Conductor	High Density Interconnection	Alumina
	Laser Diode Mount	Beryllia
	Power Supply	
Resistor	D/A-A/D Converter	Alumina
	Power Supply	Beryllia
	Resistor Network	
Microwave	Attenuator	Alumina
	Filter	Beryllia
	Amplifier	Ferrite
	Power Divider	Quartz
	Capacitor	Other Dielectrics
	Antenna	

Frequency Range 4:
>3.5 GHz to 100 GHz



ATC High Power RF Resistive Products

ATC's complete line of high powered resistive products are designed and manufactured in our ISO-9001 facility using non-toxic, cost effective, Aluminum Nitride base substrates. All products are manufactured and qualified to Mil-PRF-55342, MIL-STD 202, and ANSI J-STD-002 specifications. Leaded and flanged devices are available. Non-Magnetic styles are available in CR, LR and FR Series. Please consult factory.

ATC High powered resistive products are used in all wireless & satellite communication applications. Communication bands include GSM, PCS, W-CDMA, 3G, WCS, ISM Wireless LAN. They are also used in medical, industrial, military and aerospace applications. Typical applications include splitter/combiner networks, power amplifiers, feed forward amplifiers, RF Generators, MRI devices, isolators & circulators.



DC and RF Specifications:

- Resistance value: 50 Ω and 100 Ω standard (10 Ω to 200 Ω available)
- Terminations: Typical VSWR (Voltage Standard Wave Ratio) 1.05:1 to 1.20:1
- Resistors: Low parasitic capacitance
- Temperature Coefficient of Resistance TCR Typical <150 ppm/°C
- Operating temperature range: -55° to +150°C
- Frequency Range: DC to 18 GHz

Mechanical Specifications:

- Substrate – Aluminum Nitride
- Resistive Film – Tantalum Nitride
- Terminals – Silver
- Flangeless and Flanged tabs – 100% silver leads Covers – Alumina
- Copper flanges – Nickel or Silver plated
- **Lead-Free, RoHS compliant**


Visit ATC's website for Leaded and Flanged devices.

Order Resistive Product Design Kits Online at www.atceramics.com

ATC CR Chip Resistors


ATC Part Number*	W ±.010	L ±.010	T ±.005	A ±.005	B (Typ.)	Capacitance (pF)	Power Max (Watts)
CR11005TxxxxJ	.050	.100	.025	.045	.020	.75	5
CR11206TxxxxJ	.060	.120	.025	.055	.020	.90	15
CR12010TxxxxJ	.100	.200	.040	.090	.020	1.0	30
CR12525TxxxxJ	.245	.245	.040	.130	.020	2.0	60
CR12525TxxxxJ01	.245	.245	.040	.130	.020	2.0	100
CR13725TxxxxJ	.250	.375	.040	.198	.025	4.15	150
CR13737TxxxxJ	.370	.370	.040	.330	.025	6.0	250

*xxxx denotes Ohm value

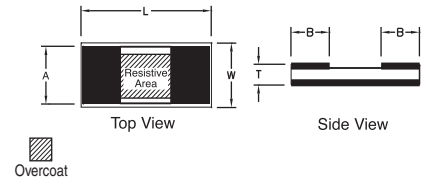

ATC CT Chip Terminations


ATC Part Number	W ±.010	L ±.010	T ±.005	A ±.010	B (Typ.)	Frequency Range (GHz)	VSWR (Typ.)	Power Max (W)
CT11020T0050J	.200	.100	.025	.034	.020	DC to 18.0	1.25:1	20
CT12010T0050J	.100	.200	.040	.050	.020	DC to 4.0	1.20:1	30
CT12525T0050J	.245	.245	.040	.090	.020	DC to 4.0	1.15:1	60
CT12525T0050J01	.245	.245	.040	.050	.020	DC to 2.5	1.15:1	100
CT12525T0050J02	.245	.245	.040	.090	.020	DC to 4.0	1.20:1	100
CT12335T0050J	.350	.230	.040	.100	.020	DC to 4.0	1.15:1	100
CT13725T0050J	.250	.375	.040	.090	.025	DC to 4.0	1.20:1	125
CT13725T0050J01	.250	.375	.040	.050	.025	DC to 1.1	1.20:1	150
CT13725T0050J02	.250	.375	.040	.090	.025	DC to 4.0	1.25:1	150
CT13737T0050J	.370	.370	.040	.120	.025	DC to 2.0	1.25:1	150
CT13737T0050J01	.370	.370	.040	.130	.025	DC to 1.0	1.20:1	250
CT13737T0050J02	.370	.370	.040	.120	.025	DC to 2.0	1.25:1	250

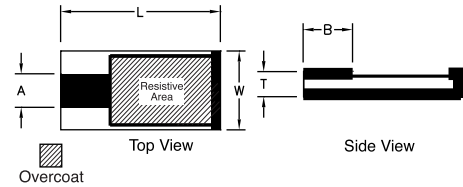

ATC CS Surface Mount Chip Resistors

ATC Part Number*	W ±.010	L ±.010	T ±.005	WT ±.005	LT ±.005	LA ±.005	Capacitance (pF)	Power Max (Watts)
CS12010TxxxxG	.100	.200	.040	.090	.030	.095	.95 pF	10
CS12525TxxxxG	.245	.245	.040	.120	.040	.110	1.85 pF	20
CS13725TxxxxG	.250	.375	.040	.120	.050	.195	3.0 pF	30
CS13737TxxxxG	.370	.370	.040	.360	.050	.195	3.5 pF	40


*xxxx denotes Ohm value



ATC CW Surface Mount Chip Resistors


ATC Part Number*	W ±.010	L ±.010	T ±.005	WT ±.005	LT ±.005	Power Max (Watts)
CW12010TxxxxG	.100	.200	.040	.090	.030	4
CW12525TxxxxG	.245	.245	.040	.120	.040	6
CW13725TxxxxG	.250	.375	.040	.120	.050	8
CW13737TxxxxG	.370	.370	.040	.360	.050	10

*xxxx denotes Ohm value

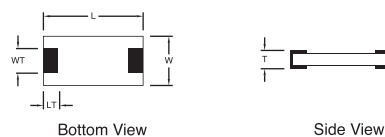

ATC CZ Surface Mount Chip Terminations

ATC Part Number	W ±.010	L ±.010	T ±.005	LT ±.005	WT ±.005	LA ±.005	Frequency Range (GHz)	VSWR (Typ.)	Power Max (W)
CZ12010T0050G	.100	.200	.040	.040	.090	.115	DC to 3.0	1.20:1	10
CZ12010T0050G02	.100	.200	.040	.020	.090	.140	DC to 3.0	1.20:1	10
CZ12525T0050G	.245	.245	.040	.030	.125	.170	DC to 4.0	1.25:1	20
CZ13725T0050G	.250	.375	.040	.050	.125	.260	DC to 2.2	1.20:1	30
CZ13737T0050G	.370	.370	.040	.050	.125	.275	DC to 3.0	1.25:1	40

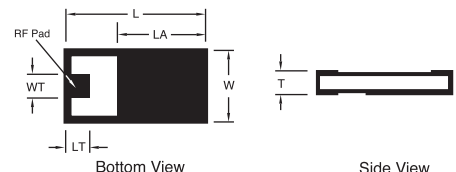

AMERICAN TECHNICAL CERAMICS

ATC North America

631-622-4700 • sales@atceramics.com

ATC Europe

+46 8 6800410 • sales@atceramics-europe.com

ATC Asia

+86-755-8366-4318 • sales@atceramics-asia.com



ATC WL Series Wire Wound Chip Inductors

ATC's family of RF surface mount inductor components is intended to complement their high frequency ultra-low ESR capacitor products. The WL Series wire wound chip inductor products have been designed to provide excellent performance at competitive prices.

This Series includes the most widely used traditional EIA case sizes – 0402, 0603, 0805, 1008 and 1206. With an inductance range of 1 nH to 15,000 nH, these products have an operating temperature of -40°C to +125°C and a temperature coefficient of inductance (TCL) of +25 to +125 ppm/°C typical from -40°C to +125°C.



The WL inductor product line is intended for RF and microwave applications and features high self-resonant frequencies (SRF), high Q, and low DC resistance. These products are manufactured on a rugged core made of high quality ceramic material that exhibits high Q at high operating frequencies.

The WL Series is especially attractive for all 800 MHz to 3.4 GHz wireless applications where cost and performance are major factors. These applications include but are not limited to: cellular base stations, broadband wireless services, point-to-point and point-to-multipoint radio as well as other RF and microwave telecommunications systems.

All WL Series inductor products are supplied in tape and reel (2000 to 4000 parts per reel depending on case size) as standard, making them ideal for automated pick and place manufacturing applications. The terminations consist of a barrier layer with a lead-free, tin-plated finish that exhibits excellent solderability for trouble-free attachments.

Inductor Product Overview

Case Size Code	Inductance Value Range (nH)	Tolerance Code	Q min. Range	SRF (MHz) typ.	RDC (Ohms) max.	IDC (mA)
0402	1.0 @ 250 MHz to 56 @ 250 MHz	J, K	16 to 25	>6000	0.045	1360
				1760	0.097	100
0603	1.6 @ 250 MHz to 5.6 @ 250 MHz	J, K	16 to 40	12,500	0.040	700
				5800	0.170	700
	6.8 @ 250 MHz to 390 @ 100 MHz	G, J, K		5800	0.110	700
				900	4.350	100
0805	2.8 @ 250 MHz to 8.2 @ 250 MHz	J, K	16 to 80	7900	0.060	800
				4700	0.120	600
	10 @ 250 MHz to 2700 @ 25 MHz	G, J, K		4200	0.100	600
				50	2.950	150
1008	10 @ 50 MHz to 27 @ 50 MHz	G, J, K	15 to 65	4100	0.08	1000
				1600	0.13	1000
	33 @ 50 MHz to 15,000 @ 2.52 MHz			1600	0.14	1000
				15	11.5	120

Visit our website for individual values and specifications.



Order Inductor Design Kits Online at
www.atceramics.com

AMERICAN TECHNICAL CERAMICS

ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com



ATC Multilayer High Q RF Capacitors

ATC 100 Series Porcelain Superchip® Multilayer Capacitors have been the industry standard for over 35 years, featuring one of the highest Qs in the industry, rugged porcelain construction, TCC of ± 90 ppm / °C, and solderable SMT chip and leaded style terminations. **RoHS compliant terminations are standard. Refer to data sheets for other styles.** Order Design Kits online at www.atceramics.com

ATC Series	Case Size Footprint in. (mm)	Cap Value Range (pF)*	Working Voltage WVDC (volts) max.	Dielectric Material	TCC -55°/+125°C (ppm/°C)
100A	.055 x .055 (1.40 x 1.40)	0.1 to 100	250	Porcelain (P90)	+90 ± 20
100B	.110 x .110 (2.79 x 2.79)	0.1 to 1000	1500	Porcelain (P90)	+90 ± 20
100C	.230 x .250 (5.84 x 6.35)	1 to 2700	2500	Porcelain (P90)	+90 ± 30
100E	.380 x .380 (9.65 x 9.65)	1 to 5100	7200	Porcelain (P90)	+90 ± 30
700A	.055 x .055 (1.40 x 1.40)	0.1 to 1000	250	Porcelain and Ceramic (NPO)	0 ± 30
700B	.110 x .110 (2.79 x 2.79)	0.1 to 5100	1500	Porcelain and Ceramic (NPO)	0 ± 30
700C	.230 x .250 (5.84 x 6.35)	1 to 2700	2500	Porcelain (NPO)	0 ± 30
700E	.380 x .380 (9.65 x 9.65)	1 to 2200	7200	Porcelain (NPO)	0 ± 30
600L	.040 x .020 (1.02 x .51)	0.1 to 27	200	Ultra-Low ESR, High Q (NPO)	0 ± 30
600S	.063 x .032 (1.60 x .81)	0.1 to 100	250	Ultra-Low ESR, High Q (NPO)	0 ± 30
600F	.079 x .049 (2.00 x 1.25)	0.1 to 240	250	Ultra-Low ESR, High Q (NPO)	0 ± 30
800A	.055 x .055 (1.40 x 1.40)	0.1 to 100	250	NPO Ceramic	0 ± 30
800B	.110 x .110 (2.79 x 2.79)	0.1 to 1000	500	NPO Ceramic	0 ± 30
200A	.055 x .055 (1.40 x 1.40)	510 to 10,000	50	BX Ceramic	±15%
200B	.110 x .110 (2.79 x 2.79)	5000 to 100,000	50	BX Ceramic	±15%
900C	.230 x .250 (5.84 x 6.35)	.01 µF to 1 µF	300	X7R Ceramic	±15%

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

631-622-4700 • sales@atceramics.com

ATC Europe

+46 8 6800410 • sales@atceramics-europe.com

ATC Asia

+86-755-8366-4318 • sales@atceramics-asia.com



ATC Series	Typical ESR (Ohms) Cap (pF)					Series Resonance (MHz)
	Cap (pF)	30 MHz	150 MHz	500 MHz	1000 MHz	
100A	1	-	0.170	0.280	0.390	9110
	10	-	0.067	0.119	0.168	3020
	100	-	0.028	0.051	0.072	1000
100B	10	-	0.047	0.082	0.115	2030
	100	-	0.033	0.060	0.085	680
	1000	-	0.015	0.027	-	230
100C	10	0.072	0.139	0.251	0.355	1457
	100	0.026	0.057	0.103	-	475
	1000	0.010	0.023	-	-	155
	2700	0.007	0.016	-	-	95
100E	10	0.076	0.147	0.266	0.376	1110
	100	0.030	0.065	0.119	-	365
	1000	0.018	0.040	-	-	120
	5100	0.010	0.022	-	-	55
700A	1	-	0.186	0.308	0.429	9110
	10	-	0.073	0.130	0.184	3020
	100	-	0.031	0.056	0.080	1000
	1000	-	0.035	0.064	-	330
700B	10	-	0.051	0.090	0.126	1840
	100	-	0.036	0.066	0.093	620
	1000	-	0.038	0.069	-	210
	5100	0.011	0.025	-	-	100
700C	10	0.072	0.139	0.251	0.355	1457
	100	0.026	0.057	0.103	-	475
	1000	0.010	0.023	-	-	155
	2700	0.007	0.016	-	-	95
700E	10	0.076	0.147	0.266	0.376	1110
	100	0.030	0.065	0.119	-	365
	1000	0.018	0.040	0.073	-	120
	2200	0.014	0.030	0.055	-	82
600L	1	-	-	0.074	0.074	11,310
	10	-	-	0.054	0.072	4230
	27	-	-	0.063	0.086	2780
600S	1	-	-	0.120	0.117	10,500
	10	-	-	0.058	0.070	5150
	100	-	0.034	0.043	0.070	1200
600F	1	-	-	0.070	0.084	9050
	10	-	-	0.062	0.078	3910
	100	-	-	0.055	0.078	2010
	240	-	-	-	-	-
800A	1	-	0.072	0.078	0.081	10,000
	10	-	0.040	0.048	0.064	4000
	100	-	0.032	0.048	0.071	1200
800B	10	-	0.038	0.047	0.064	5300
	100	-	0.027	0.041	0.060	2000
	1000	-	0.024	0.051	-	700
200A	510	1.010	2.238	-	-	341
	1000	0.553	1.226	-	-	247
	10,000	0.071	0.157	-	-	82
200B	5000	0.202	0.450	-	-	89
	10,000	0.133	0.296	-	-	63
	100,000	0.033	-	-	-	20
900C	10,000	0.059	-	-	-	50
	100,000	0.034	-	-	-	16
	1 µF	0.020	-	-	-	5

ATC's products are supported by fully certified in-house RF and QA Labs with test capability from DC to Millimeter-wave Frequencies

Standard Electrical Testing:

- ▶ Capacitors: Capacitance, Dissipation Factor, Dielectric Withstanding Voltage, Insulation Resistance
- ▶ Inductors: Inductance, Q, SRF, RDC, IDC
- ▶ Resistors: Resistance, RF Power, VSWR, Shunt Capacitance

Hi-Reliability Testing (MIL-PRF-55681, MIL-PRF-123) and COTS Upscreening Program:

- ▶ Full Burn In and Life Test Capability
- ▶ Electrical, Environmental and Mechanical (MIL-STD-202, MIL-STD-883)

Specialized RF Power Testing:

- ▶ High RF Power: CW and pulsed
- ▶ Thermal Characterization
- ▶ High RF Voltage: Corona, Internal and external breakdown, Partial discharge
- ▶ Specialized test fixtures designed in-house to support a full range of customer requirements

Frequency Range: 2 MHz to 1 GHz

POPULAR TEST FREQUENCIES: APPLICATIONS:

13.56 MHz	Semiconductor Manufacturing
64 MHz	1.5 Tesla MRI Systems
128 MHz	3 Tesla MRI Systems
1 GHz	Telecommunications & Cellular Systems
ISM	Unlicensed Wireless Devices

Small Signal RF Testing:

- ▶ Equivalent Series Resistance (ESR) from 10 MHz to 2 GHz
- ▶ Impedance vs. Frequency: 1 MHz to 1.8 GHz
- ▶ S-Parameters: Four-receiver architecture, full two-port TRL calibration to 40 GHz

Design Support For Capacitor, Inductor, & Resistive Products:

- ▶ Comprehensive electrical, mechanical and environmental data available
- ▶ S-Parameters
- ▶ Tech-Select™ RF Design Software
- ▶ Applications Support Team of Experienced RF Engineers



ATC Single Layer Capacitor Products

ATC's extensive line of Single Layer Capacitor (SLC) products offers solutions to the most demanding microwave and millimeter wave requirements. Broadband applications with operating frequencies up to 100 GHz are achievable with ATC's SLC products.

- Capacitance Range: 0.04 to 10,000 pF
- Wide selection of dielectrics with K's of 14 to 25,000
- Ultra-high Q
- Up to 100 WVDC rating
- Standard case sizes from 10 mils.
- "Design Your Own" option
- Manufacturing facilities certified to ISO 9001
- Custom Design Kits available online at www.atceramics.com




Stable K Dielectrics	Dielectric Code	Dielectric Const. (K)	TCC (-55°C to +125°C)	Cap. Range (pF)	Max. DF @ 1 MHz (%)		Q
					@ 1 MHz	@ 1 KHz	
	A	14	+90 ±30 PPM/°C	0.04 to 5.6	0.01	-	11,000 @ 6.4 GHz
	BB	31	0 ±30 PPM/°C	0.06 to 13	0.15	-	950 @ 4.5 GHz
	CA	60	0 ±30 PPM/°C	0.1 to 27	0.15	-	770 @ 5 GHz

Mid-K Dielectrics	Dielectric Code	Dielectric Const. (K)	TCC (-55°C to +125°C)	Cap. Range (pF)	Max. DF (%)*		Q @ Freq.
					@ 1 MHz	@ 1 KHz	
	CC	130	-750 ±220 PPM/°C	0.3 to 56	0.15	-	2310 @ 5 GHz
	DA	165	-1500 ±500 PPM/°C	0.4 to 68	0.25	-	500 @ 1.8 GHz
	DB	200	±7.5% max. change (non-linear)	0.5 to 82	0.25	-	29 @ 5 GHz
	HC	420	-2000 ±500 PPM/°C	1.1 to 180	0.7	0.3	-
	EA	650	-4700 ±1500 PPM/°C	1.5 to 270	0.3	0.3	-

High-K Dielectrics	Dielectric Code	Dielectric Const. (K)	TCC (-55°C to +125°C)	Cap. Range (pF)	Max. DF (%)*	
					@ 1 MHz	@ 1 KHz
	EC	650	±10% max. change (non-linear)	1.5 to 270	1.5	1.5
	J	1100	+5% to -15% max. change (non-linear)	2.4 to 470	2.5	2.0
	F	2000	±15% max. change (non-linear)	4.3 to 820	2.5	2.0
	GA	4000	±15%	10 to 1800	3.0	2.0

Ultra High-K Dielectrics	Dielectric Code	Dielectric Const. (K)	TCC (+10°C to +85°C)	Cap. Range (pF)	Max. DF (%)*	
					@ 1 MHz	@ 1 KHz
	G	6000	±10% to -75% max. change (non-linear)	13 to 2400	2.5	2.0
	K	9000	0% to -92% max. change (non-linear)	20 to 3300	4.0	2.0
	L	16,000	+0/-92%	33 to 6200	3.5	2.0

*Capacitance and DF are measured at 1MHz for capacitance values ≤ 1,000 pF and 1 KHz for capacitance values > 1,000 pF.



ATC 545 L, 530 L, 520 L, and 500 S Broadband SMT Capacitors

Best Broadband and Ultra-Broadband Options for Reliability and Widest Frequency Coverage.

Attributes

- SMT Broadband Devices
- Optoelectronics
- Low Insertion Loss
- High speed data
- Flat Frequency Response
- Sonet
- One Piece Construction

- Broadband Wireless Communications
- Orientation Insensitive
- Microwave/Millimeter-Wave
- Tape and Reel, Surface Mountable
- Rugged Ceramic Construction
- RoHS Compliant
- Unit-to-Unit Performance Repeatability

Applications/Markets

- Optoelectronics
- High speed data
- Sonet
- Broadband Wireless Communications
- Microwave/Millimeter-Wave



ATC Series	Frequency Response	Insertion Loss	Capacitance	Voltage Ratings	Termination Options
545	16 KHz to 40+ GHz	< 0.5dB	100 mF	16 V	RoHS/Tin-Lead/Gold
530	16 KHz to 18 GHz	1dB max.	100 mF	16 V	RoHS compatible
520	160 KHz to 16 GHz	1dB max.	10 mF	16 V	RoHS compatible
500	1 GHz to 40 GHz	1dB typ.	0.1 pF to 10 pF	100 V	Gold

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

631-622-4700 • sales@atceramics.com

ATC Europe

+46 8 6800410 • sales@atceramics-europe.com

ATC Asia

+86-755-8366-4318 • sales@atceramics-asia.com

w w w . a t c e r a m i c s . c o m



ATC Power Capacitor Assemblies

ATC standard & custom Power Assemblies are fabricated from PARALLEL and SERIES combinations of industry-respected ATC catalog products.

Customer requirements are addressed by a variety of computer matching and assembly techniques which have enabled ATC to extend voltage, current, ESR, Q, and tolerance parameters beyond what is normally available in the industry.


ATC Power Assemblies offer distinct advantages over purchasing standard components "in the general ballpark" and trying "hit & miss" approaches to configure & match these in a circuit environment. ATC's strong tradition of quality and customer service enables us to work closely with design engineers to meet critical specifications.

Assemblies of parallel grouped capacitors not only increase the capacitance but will exhibit ultra-low ESR. Assemblies of series grouped capacitors will allow both tighter tolerances and higher working voltages. Combinations of Parallel and Series assemblies can realize an increase in both capacitance and voltage rating. Assemblies can be composed of multiple capacitors in horizontal, vertical or multi-level mounting configurations.

MATCHED SETS: SERIES OR PARALLEL CONFIGURATIONS

For customers requiring non-standard values or very close tolerance capacitance values, ATC can select a set of capacitors (2 or more) to achieve the desired results. Available tolerances appear in table at right.


VOLTAGE DIVIDERS: Voltage dividers based on capacitive reactance can be provided to customers' specific capacitance ratio. Ratios can be provided within 1.0%.

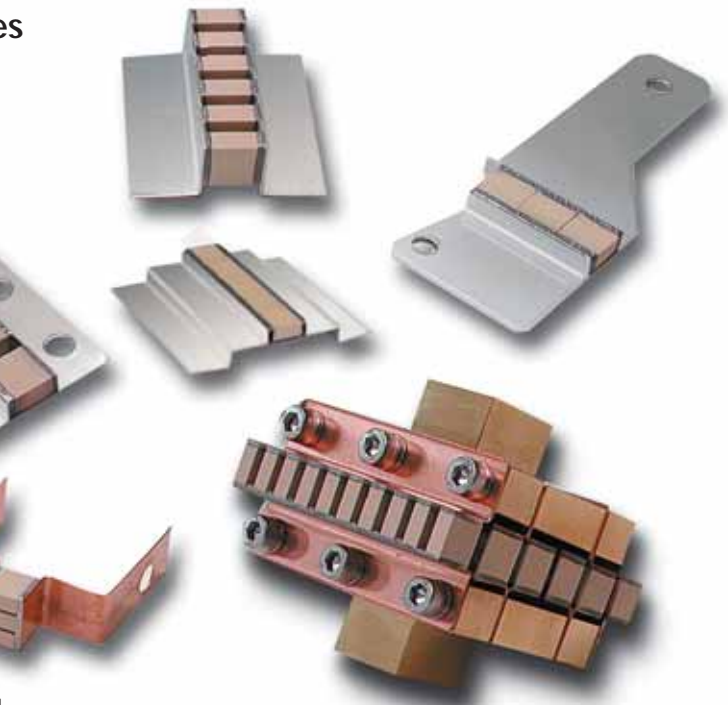

Series	Capacitance Range	Tolerance
100A/700A	1 pF to 6.2 pF 6.8 pF to 1000 pF	0.1 pF 0.5%
100B/700B	0.1 pF to 6.2 pF 6.8 pF to 5100 pF	0.1 pF 0.5%
100C	1 pF to 2700 pF	0.5%
100E	1 pF to 5100 pF	0.5%

ASSEMBLIES ARE DESIGNED TO MEET CUSTOMER NEEDS. ATC OFFERS THE FOLLOWING OPTIONS:

- Lead designs to customer specifications
- Non-magnetic assemblies for MRI applications
- Coatings to enhance high voltage operation
- Marking: Assemblies can be marked with ATC or customer part numbers
- Special Test Options (enhanced screening) for high reliability requirements: (a) Accelerated Life Testing and Voltage Conditioning: Individual parts are tested for 100 hours at elevated voltages and at 125° C. (b) Burn-in at elevated temperatures and voltages to insure reliability

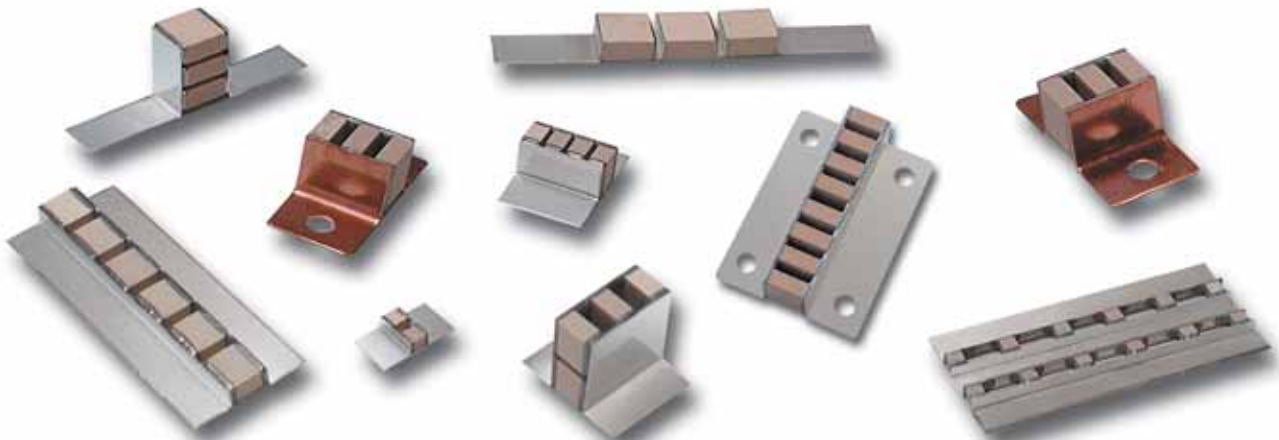

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com



ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com



ATC Custom Thin Film Circuits and Components

ATC brings a new standard of responsiveness and quality to thin film technology products. Custom metalization and patterned substrates are offered to address a broad spectrum of deposition and hybrid circuit fabrication requirements.

Custom metalization consists of sputtered and electroplated coatings made to specifications. Products may include via holes and odd shaped substrates in a wide choice of ceramics and dielectric materials. Three target, batch sputtering systems with load-locks are utilized for producing the most consistent film quality.

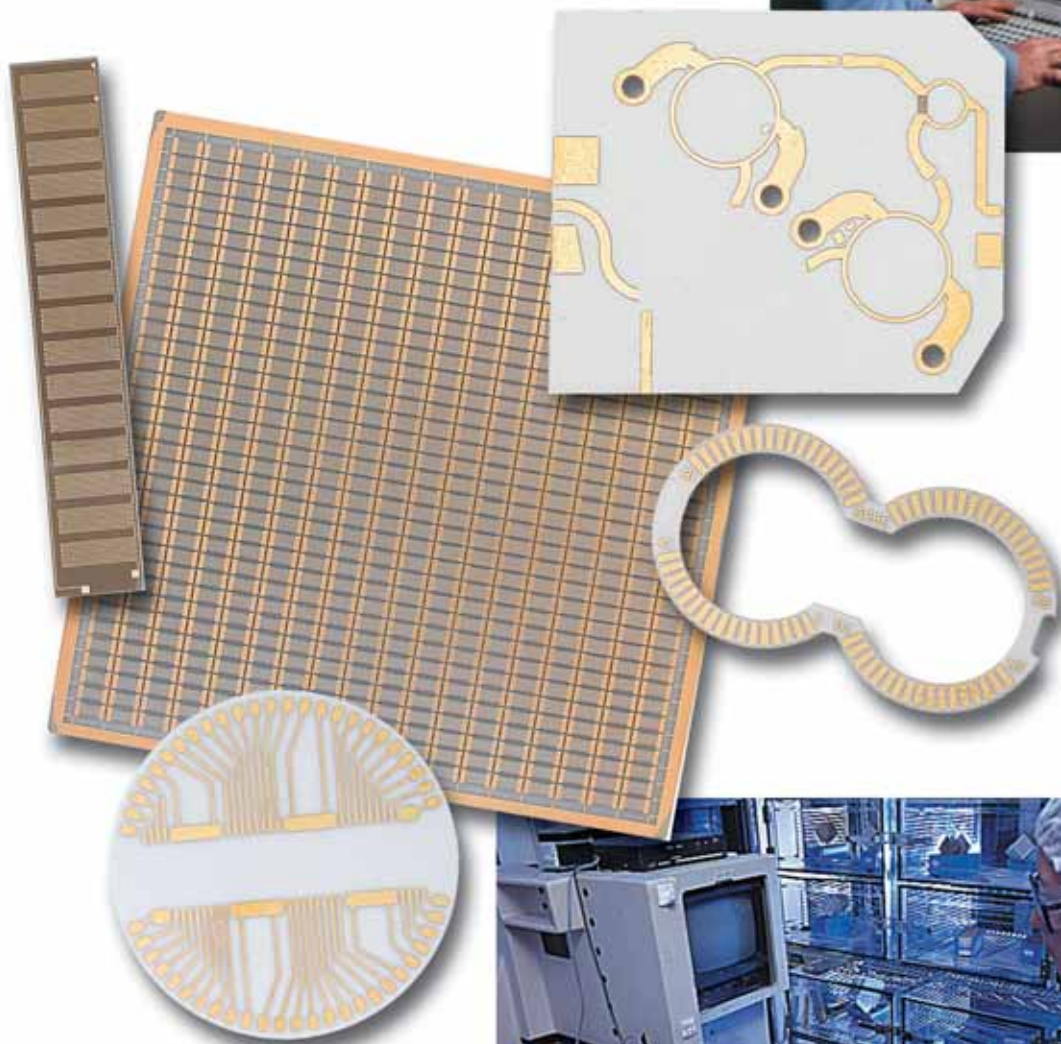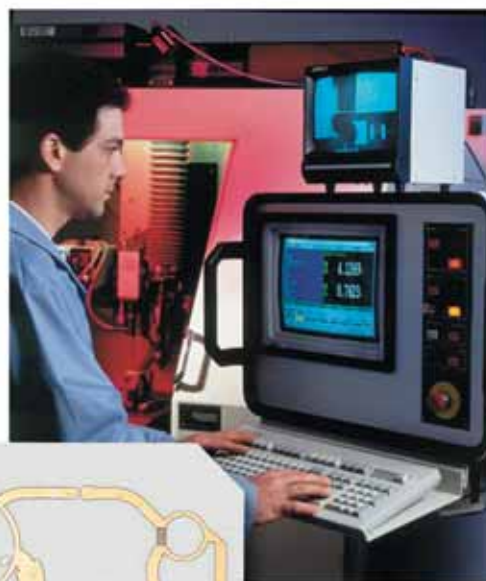

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

631-622-4700 • sales@atceramics.com

ATC Europe

+46 8 6800410 • sales@atceramics-europe.com

ATC Asia

+86-755-8366-4318 • sales@atceramics-asia.com

Typical Metalizations	Application	Attachment Method	Metalization/ Resistor Layers	Typical value
1. TaN – TiW – Au	RF/Microwave circuits: attenuators, loads and DC biasing networks. Hybrids with resistors and spiral inductors. End products: Power supplies, couplers, splitters, filters, amplifiers, SAW devices, laser diode mounts and others.	Pb/In, Au/Si, Au/Ge – Eutectic Epoxy Wire Bonding	TaN 25 to 100 ohms/sq. TiW 300 to 500 Å Au 20 to 300 μ"	50 300 150
2. TiW – Au	Same as 1. – without resistors		TiW 300 to 500 Å Au 20 to 300 μ"	300 150
3. TaN – TiW – Au – Ni – Au	Same as 1. – When repeated soldering is required for repairs	Pb/Sn, Au/Sn soldering Pb/Sn Eutectic Epoxy Wire Bonding	TaN 25 to 100 ohms/sq. TiW 300 to 500 Å Au 20 to 300 μ" Ni 35 to 75 μ" Au 20 to 100 μ"	50 300 20 min. 35 min. 150
4. TiW – Cu – Ni* – Au	High Power/Low Loss RF and Power Supply	Pb/Sn, Au/Sn soldering Epoxy Wire Bonding	TiW 300 to 500 Å Cu 50 to 2000 μ" Ni 35 to 75 μ" Au 20 to 100 μ"	300 500 35 min. 40 min.
5. TaN – TiW – Au Cu – Ni* – Au	High Power/Low Loss RF and Power Supply with Resistors	Pb/Sn soldering Epoxy Wire Bonding	TaN 25 to 100 ohms/sq. TiW 300 to 500 Å Au 3000 to 5000 Å Cu 50 to 2000 μ" Ni 40 to 120 μ" Au 20 to 100 μ"	50 300 3000 min. 500 35 min. 40 min.

* *Optional*

For direct inquiries, technical information and quotations, please contact ATC's Custom Thin Film Product Group at 904-726-3426, or tfsales@atceramics.com



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com



NEW! ATC 100 A/B and 700 A/B MLCs Extended Voltage Ratings to 1500 WVDC

ATC now offers 100A/B Porcelain Superchips® and 700A/B Porcelain and NPO Multilayer Capacitors with extended voltage ratings, providing the widest range of capacitance values with extended voltage ratings available

100A / 700A

Capacitance Range	Standard WVDC	Extended WVDC
0.1 to 56 pF	150 WVDC	250 WVDC
62 to 100 pF	150 WVDC	200 WVDC

100B/ 700B


Capacitance Range	Standard WVDC	Extended WVDC
0.1 to 47 pF	500 WVDC	1500 WVDC
51 to 100 pF	500 WVDC	1000 WVDC
110 to 200 pF	300 WVDC	1000 WVDC



NEW! ATC 800 Series High RF Power Multilayer Capacitors

- Optimized Form Factor
- Lowest ESR @ Wireless Frequencies
- Highest Self Resonance
- Rugged, Reliable NPO Dielectric
- High RF Power Applications
- Superior Thermal Performance
- Ideal for Large and Small Signal Applications

800 SERIES Case A	Capacitance Range	Electrical Specifications
• .055" x .055" (1.4 mm x 1.4 mm)	• 0.1 pF to 100 pF	• Voltage Rating: Up to 250 WVDC • IR: 10 ⁵ MΩ @ 25°C • TCC: 0 ±30 PPM/°C
800 SERIES Case B	Capacitance Range	Electrical Specifications
• .110" x .110" (2.79 mm x 2.79 mm)	• 0.1 pF to 1000 pF	• Voltage Rating: Up to 500 WVDC • IR: 10 ⁵ MΩ @ 25°C • TCC: 0 ±30 PPM/°C

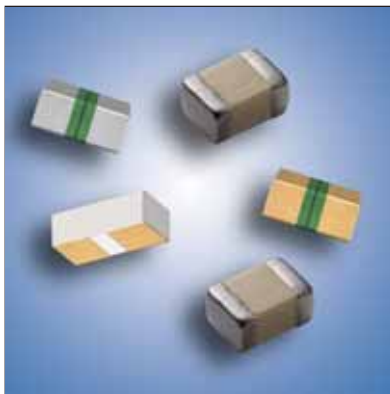

ATC 545 L, 530 L, 520 L, and 500 S Broadband SMT Capacitors

Your best broadband and ultra-broadband options for reliability.

- Widest Frequency Coverage
- SMT Broadband Capacitors
- Ultra-Low Insertion Loss
- Flat Frequency Response
- One Piece Construction
- Orientation insensitive*
- Tape & Reel, Surface Mountable
- Rugged Ceramic Construction
- RoHS Compliant
- Unit to Unit Performance Repeatability

ATC Series	Operating Frequency	Insertion Loss	Capacitance	Voltage Rating (WVDC)	Termination Options
545 L	16 KHz to 40+ GHz	<0.5db	100 nF	16 V	Tin, Solder, Gold
530 L	16 KHz to 18 GHz	1db max.	100 nF	16 V	Tin
520 L	160 KHz to 16 GHz	1db max.	10 nF	16 V	Tin
500 S	1 GHz to 40 GHz	1db max.	0.1 pF to 10 pF	0.1 to 4.7 pF: 100 V 5.1 to 10 pF: 50 V	Platinum/Gold



ATC 600 Series Ultra-Low ESR, NPO, EIA MLCs

Excellent for RF and Microwave Transmit and Receive Wireless Applications

- Lowest ESR in Class
- Higher power handling capability
- Highest voltage rating in class for greater design margin
- High Self Resonance
- Reduces thermal noise (KTB) and improves signal to noiseratio (SNR) in receiver applications
- Improves PA reliability by operating cooler
- Wireless / Telecom Base Stations
- Satellite Systems
- Wireless Communications
- Microwave Communications Systems
- WiMAX
- Approved Supplier to DSCC Drawings

*Horizontal Mount for 500 S

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

631-622-4700 • sales@atceramics.com

ATC Europe

+46 8 6800410 • sales@atceramics-europe.com

ATC Asia

+86-755-8366-4318 • sales@atceramics-asia.com



**ATC's Design Support Software –
New Enhanced 2008 Version**

Tech Select is a design support tool that provides access to all electrical and mechanical parameters for ATC products. Included are Smith charts, S-Parameters, RF current and voltage, ESR, Q, impedances and more. RF parameters can be achieved at frequencies entered by the user.

By selecting and sorting on the most critical parameters this program generates a complete list of product options with part numbers. View and print datasheets for the selected products. Download size is 5.2 MB.

Tech-Select is compatible with the following operating systems: Windows 2000, XP and Vista.



These measurement-based models, available for selected ATC components, are both substrate and part-value scalable, and represent high-order resonant effects and accurate effective series resistance. Each model includes complete documentation detailing the test fixtures used, measurement conditions, range of validity, and model-to-measurement data comparisons.



100 A and 100 B Series S-Parameter Data

Scattering parameters of ATC Series A / B as well as 180 R Series Capacitors measured in vertical orientation on alumina. 'Readme' file provides details of measurement conditions

700 A and 700 B Series S-Parameter Data

Scattering parameters of ATC 700 Series A / B Series Capacitors measured in vertical orientation on alumina. 'Readme' file provides details of measurement conditions

600 L, 600 S and 600 F Series S-Parameter Data

Scattering parameters of ATC 600 Series Ultra-Low ESR Capacitors measured on Rogers R04350 softboard. 'Readme' file provides details of measurement conditions

NEW! 545 L Series UBC™ Ultra-Broadband and 530 L, 520 L and 500 S Series Broadband Capacitor S-Parameter Data

Measured on 10-mil thick Rogers R04350 microstrip board, with the exception of 500 S Capacitors which are measured on 25 mil alumina 'Readme' file provides details of measurement conditions

NEW! 800 A and 800 B Series S-Parameter Data

Scattering parameters of ATC 800 A / B Series Ultra-Low ESR Capacitors, measured on Rogers R04350 softboard. 800 A measured in horizontal and vertical orientation; 800 B measured in vertical orientation. 'Readme' file provides details of measurement conditions

WL Series Inductors S-Parameter Data

Scattering parameters of ATC WL Series Chip Inductors measured in horizontal orientation on Rogers R04350 softboard. 'Readme' file provides details of measurement conditions

CONTACT INFORMATION

ATC NORTH AMERICA

AMERICAN TECHNICAL CERAMICS

One Norden Lane, Huntington Station, NY 11746-2142
Phone: 631-622-4700 • Fax: 631-622-4748
email: sales@atceramics.com • website: www.atceramics.com

ATC EUROPE

For technical support in your region, please contact the local office in Germany or the UK. For sales orders and all other transactions in Europe, Africa and the Middle East, please contact the ATC Sales, Applications Support and Distribution Center in Stockholm, Sweden.

SALES, APPLICATIONS SUPPORT & DISTRIBUTION CENTER

Serving Europe, Africa and the Middle East
AMERICAN TECHNICAL CERAMICS AB
Ellipsvaegen 5
SE-141 75 Kungens Kurva, Sweden
Phone: +46 8 6800410 • Fax: +46 8 6800415 (main) • Mobile: +46 805901399
email: sales@atceramics-europe.com • website: www.atceramics-europe.com

ATC EUROPE - REGIONAL SATELLITE OFFICE, GERMANY

AMERICAN TECHNICAL CERAMICS
Raiffeisenstrasse 12
D-83607 Holzkirchen, Germany
Phone: +49 8024 6083978 • Fax: +49 8024 6083979 Mobile: +49 1515 4106982
email: twiesner@atceramics-europe.com

ATC EUROPE - REGIONAL SATELLITE OFFICE, RUSSIA

AMERICAN TECHNICAL CERAMICS
Komsomolsky Prospect., 42 Bldg. 3, Office 9
Moscow, 119048, Russia
Phone: +7 495 247 0747 • Fax: +7 495 245 9115 • Mobile: +7 495 774 7888
Email: dburmistrov@atceramics-europe.com

ATC EUROPE - REGIONAL SATELLITE OFFICE, UK

AMERICAN TECHNICAL CERAMICS
34 Pewley Way
Guildford, Surrey England GU1 3QA
Phone: +44 1483207402 • Fax: +46 8 6800415 • Mobile: +44 7817221903
email: mchapman@atceramics-europe.com • website: www.atceramics-europe.com

ATC ASIA SALES AND TECHNICAL SUPPORT OFFICE

AMERICAN TECHNICAL CERAMICS (CHINA) LIMITED

Room 621-623, International Culture Building,
No. 3039 Shennan Centre Road, Futian Dist. Shenzhen,
Guangdong Province, 518031 P. R. China
Phone: +86 755 8366 4318 • Fax: +86 755 8375 2024
e-mail: sales@atceramics-asia.com • website: www.atceramics-asia.com

REGIONAL SATELLITE OFFICE, HYDERABAD - INDIA

Flat No. 303, Sai Teja Towers
Plot No. 18, Engineers Colony
Yellareddy Guda, Hyderabad - 500 073
Phone: +91 40 55 620064 • Fax: +91 40 23 733984
email: mvrao@atceramics.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. A 10/03). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2001 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-908; Rev Q, 8/08

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

631-622-4700 • sales@atceramics.com


ATC Europe

+46 8 6800410 • sales@atceramics-europe.com


ATC Asia

+86-755-8366-4318 • sales@atceramics-asia.com


Other ATC Product Catalogs

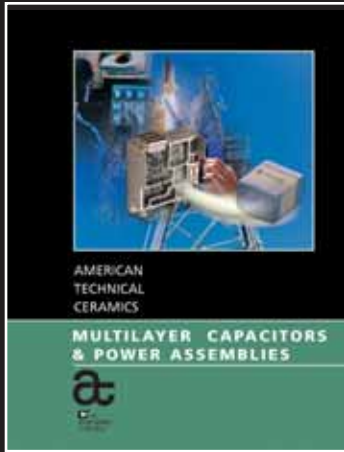

Multilayer Capacitors
& Power Assemblies

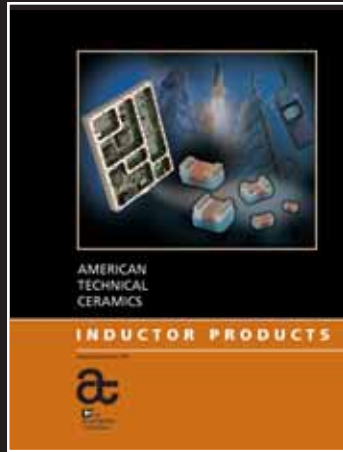

Inductor
Products

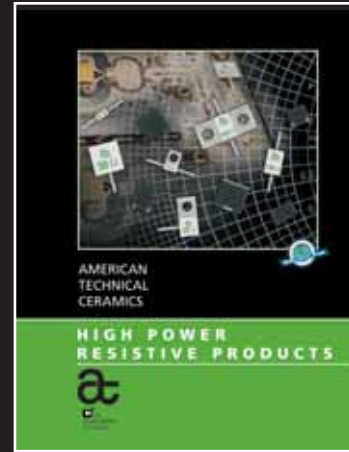

High Power
Resistive Products



Custom Thin Film
Products



Single Layer
Capacitors

www.atceramics.com



AMERICAN

TECHNICAL

CERAMICS

ATC North America
631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318
sales@atceramics-asia.com

 THE
ENGINEERS'
CHOICE™
ISO 9001 REGISTERED

www.atceramics.com