

## Standard Microcircuit Drawing Product Offering



### Introduction to the SMD Product Listing

Each Standard Microcircuit Drawing (SMD) part number that Atmel supplies corresponds to an Atmel /883 part number. SMD products are compliant to MIL-STD-883, paragraph 1.2.1 and to the requirements of the applicable standard microcircuit drawing. The tables in this section list the currently approved Atmel SMD parts by Atmel part number (Table 1) and by SMD part number (Table 2). They define and cross reference the Atmel /883 part number with the SMD part number for your ordering convenience.

Figure 1 (below) shows how an Atmel SMD order number defines a part, compared to the components of the Atmel similar part number.

Please note that some SMD part numbers contain the letter "M" between the device type and the case outline designator. The "M" is part of the one part-one number system, set up by DESC. It is a device class designator which indicates the part is an SMD part number as opposed to being a JAN part number.

**Figure 1.** Components of an SMD number (top) compared to the Atmel similar part number (bottom).

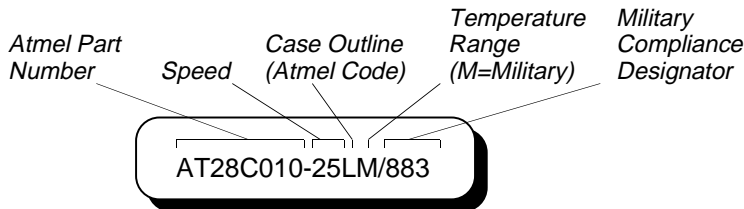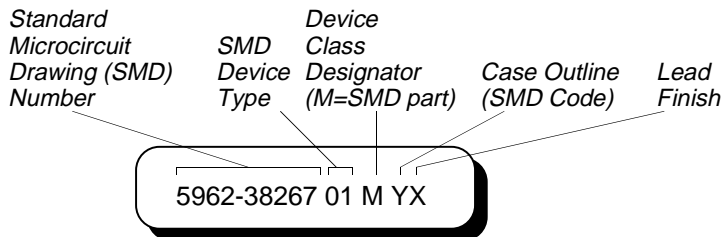

## How to Use the Atmel Part Type Reference Table

The organization of Table 1 enables the purchaser to order a standardized military part by using the Atmel generic part type to locate the correct SMD drawing number. The SMD part number is the order number for SMD devices. The Atmel generic part type, which begins with the prefix "AT," heads Table 1. There are four sections in this table (see sample table below):

### SMD Options

The first section lists the SMD options available at Atmel. It includes the industry generic part type, the SMD drawing number, and the SMD device type. The SMD case outline options, the lead finish options, the circuit description, and the access time that correspond to that device type are also included. The tables for the E<sup>2</sup>PROM in this

section include the end write indicator in the circuit description column and the write mode for the specific device type.

### Order Code Cross-Reference

The next section of the table cross-references each optionally complete SMD part number (see ❶ below) with the Atmel similar /883 part number (see ❷ below).

### Case Outline Legend

The third section gives the SMD case outline options available for the device.

### Lead Finish Legend

The last section lists the SMD lead finish options available for the device.

AT28C64B										
SMD Options with Part Description and Specifications	Generic Number		Standard Microcircuit Drawing Number				Description			
	28C64B	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time (ns)	Write Speed (ns)	Endurance (Cycles)
		5962-87514	08	X	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-87514	09	X	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K		
Order Code Cross-Reference	Atmel Case No. 1FN41		Example: Atmel Order Number				Atmel Similar Part Number			
			❶	5962-87514 08 XX	❷	AT28C64B-25DM/883				
				5962-87514 09 XX		AT28C64B-20DM/883				
Case Outline Legend	Case Outline									
	X	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual In-line Package (CerDip)								
	Lead Finish									
Lead Finish Legend	X	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MLL-38535B Appendix A)								
	A	Hot Solder Dip								

Note: Finish letter "X" shall not be marked on the microcircuit or its packaging. This designation is provided for use in drawings, part lists, purchase orders, or other documentation where lead finishes A, B or C are all considered acceptable and interchangeable without preference. For Government logistic support, the A lead finish will be acquired and supplied

to the end user when the X is included in the PIN for lead finish. If the PIN is not available with the A lead finish, the same PIN will be acquired except with the B or C lead finish designator as determined by availability. Type C terminal material is a fired on metallization used with leadless chip carriers.

## How to Use the Atmel SMD Number Reference Table

Table 2 allows quick reference to the Atmel /883 similar part number when the SMD part number is known by the purchaser. The head for Table 2 is the SMD drawing number (see the example table below). The only section in this table is a cross-reference between the optionally complete SMD drawing number (see ❶ below) and the

corresponding Atmel similar /883 part number (see ❷ below). It also includes the circuit description and access time for that part number. The E<sup>2</sup>PROM tables include the end write indicator (which is in the circuit description column) the write mode, the write speed, and the endurance cycles for the specific part number.

Order Codes		Part Description and Specifications					
5962-87514							
Order Code Cross-Reference	❶ Atmel Order Number	❷ Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time (ns)	Write Spd. (ns)	Endur. (Cycles)
	5962-87514 08 XX	AT28C64B-25DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
	5962-87514 09 XX	AT28C64B-20DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
	5962-87514 10 XX	AT28HC64B-12DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	2	10K

**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C64</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C64	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-87514	13	X, Y, Z	X, A	8K x 8 E <sup>2</sup> PROM Rdy/Busy	Byte	350	1	10K
	5962-87514	14	X, Y	X, A	8K x 8 E <sup>2</sup> PROM Rdy/Busy	Byte	300	1	10K
	5962-87514	15	X, Y, Z	X, A	8K x 8 E <sup>2</sup> PROM Rdy/Busy	Byte	250	1	10K
	5962-87514	16	X, Y	X, A	8K x 8 E <sup>2</sup> PROM Rdy/Busy	Byte	200	1	10K
	5962-87514	17	X, Y	X, A	8K x 8 E <sup>2</sup> PROM Rdy/Busy	Byte	150	1	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-87514 <b>13 XX</b>				AT28C64-35DM/883				
	5962-87514 <b>13 YX</b>				AT28C64-35LM/883				
	5962-87514 <b>13 ZX</b>				AT28C64-35FM/883				
	5962-87514 <b>14 XX</b>				AT28C64-30DM/883				
	5962-87514 <b>14 YX</b>				AT28C64-30LM/883				
	5962-87514 <b>15 XX</b>				AT28C64-25DM/883				
	5962-87514 <b>15 YX</b>				AT28C64-25LM/883				
	5962-87514 <b>15 ZX</b>				AT28C64-25FM/883				
	5962-87514 <b>16 XX</b>				AT28C64-20DM/883				
	5962-87514 <b>16 YX</b>				AT28C64-20LM/883				
	5962-87514 <b>17 XX</b>				AT28C64-15DM/883				
	5962-87514 <b>17 YX</b>				AT28C64-15LM/883				
<b>Case Outline</b>									
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)								
<b>Y</b>	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
<b>Z</b>	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)								
<b>Lead Finish</b>									
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)								
<b>A</b>	Hot Solder Dip								

Note: New designs to use AT28C256 product SMD 5962-88525.





**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C64F</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C64F	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
		5962-87514	28	X, Y, Z	X, A	8K x 8 E <sup>2</sup> PROM Rdy/Busy	Byte	200	0.2
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
		5962-87514	<b>28 XX</b>		AT28C64F-20DM/883				
		5962-87514	<b>28 YX</b>		AT28C64F-20LM/883				
		5962-87514	<b>28 ZX</b>		AT28C64F-20FM/883				
<b>Case Outline</b>									
X	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)								
Y	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
Z	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)								
<b>Lead Finish</b>									
X	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)								
A	Hot Solder Dip								

Note: New designs to use AT28C256 product SMD 5962-88525.

**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C64X</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C64X	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-87514	18	X, Y	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	350	1	10K
	5962-87514	19	X, Y	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	300	1	10K
	5962-87514	20	X, Y, Z	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	250	1	10K
	5962-87514	21	X, Y	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	200	1	10K
	5962-87514	22	X, Y	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	150	1	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-87514 <b>18 XX</b>				AT28C64X-35DM/883				
	5962-87514 <b>18 YX</b>				AT28C64X-35LM/883				
	5962-87514 <b>19 XX</b>				AT28C64X-30DM/883				
	5962-87514 <b>19 YX</b>				AT28C64X-30LM/883				
	5962-87514 <b>20 XX</b>				AT28C64X-25DM/883				
	5962-87514 <b>20 YX</b>				AT28C64X-25LM/883				
	5962-87514 <b>20 ZX</b>				AT28C64X-25FM/883				
	5962-87514 <b>21 XX</b>				AT28C64X-20DM/883				
	5962-87514 <b>21 YX</b>				AT28C64X-20LM/883				
	5962-87514 <b>22 XX</b>				AT28C64X-15DM/883				
5962-87514 <b>22 YX</b>				AT28C64X-15LM/883					
<b>Case Outline</b>									
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)								
<b>Y</b>	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
<b>Z</b>	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)								
<b>Lead Finish</b>									
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)								
<b>A</b>	Hot Solder Dip								

Note: New designs to use AT28C256 product SMD 5962-88525.





**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C64B</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C64B	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-87514	08	X	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
	5962-87514	09	X	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-87514 <b>08 XX</b>				AT28C64B-25DM/883				
	5962-87514 <b>09 XX</b>				AT28C64B-20DM/883				

<b>Case Outline</b>	
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)
<b>Lead Finish</b>	
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)
<b>A</b>	Hot Solder Dip

Note: New designs to use AT28C256 product SMD 5962-88525.

<b>AT28HC64B</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28HC64B	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-87514	10	X	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	10	10K
	5962-87514	11	X	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	10	10K
	5962-87514	12	X	X, A	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	70	10	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-87514 <b>10 XX</b>				AT28HC64B-12DM/883				
	5962-87514 <b>11 XX</b>				AT28HC64B-90DM/883				
	5962-87514 <b>12 XX</b>				AT28HC64B-70DM/883				

<b>Case Outline</b>	
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)
<b>Lead Finish</b>	
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)
<b>A</b>	Hot Solder Dip

Note: New designs to use AT28C256 product SMD 5962-88634.

**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C256</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C256	Drawing Number	Device Type	Case Outline	Lead Finish	Circui Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-88525	01	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
	5962-88525	02	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
	5962-88525	03	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
	5962-88525	04	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
	5962-88525	06	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
	5962-88525	09 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
	5962-88525	10 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
	5962-88525	11 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
	5962-88525	12 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
	5962-88525	14 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-88525 <b>01 UX</b>				AT28C256-35UM/883				
	5962-88525 <b>01 XX</b>				AT28C256-35DM/883				
	5962-88525 <b>01 YX</b>				AT28C256-35LM/883				
	5962-88525 <b>01 ZX</b>				AT28C256-35FM/883				
	5962-88525 <b>02 UX</b>				AT28C256-30UM/883				
	5962-88525 <b>02 XX</b>				AT28C256-30DM/883				
	5962-88525 <b>02 YX</b>				AT28C256-30LM/883				
	5962-88525 <b>02 ZX</b>				AT28C256-30FM/883				
	5962-88525 <b>03 UX</b>				AT28C256-25UM/883				
	5962-88525 <b>03 XX</b>				AT28C256-25DM/883				
	5962-88525 <b>03 YX</b>				AT28C256-25LM/883				
	5962-88525 <b>03 ZX</b>				AT28C256-25FM/883				
	5962-88525 <b>04 UX</b>				AT28C256-20UM/883				
	5962-88525 <b>04 XX</b>				AT28C256-20DM/883				
	5962-88525 <b>04 YX</b>				AT28C256-20LM/883				
5962-88525 <b>04 ZX</b>				AT28C256-20FM/883					

Note: 1. SMD specifies Software Data Protection feature for device type, although Atmel product supplied to every device type on the SMD is 100% tested for this feature.

(continued)





**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C256 (Continued)</b>		
<b>Atmel Cage No. 1FN41</b>	<b>Example: Atmel Order Number</b>	<b>Atmel Similar Part Number</b>
	5962-88525 <b>06 UX</b>	AT28C256-15UM/883
	5962-88525 <b>06 XX</b>	AT28C256-15DM/883
	5962-88525 <b>06 YX</b>	AT28C256-15LM/883
	5962-88525 <b>06 ZX</b>	AT28C256-15FM/883
	5962-88525 <b>09 UX</b>	AT28C256-35UM/883
	5962-88525 <b>09 XX</b>	AT28C256-35DM/883
	5962-88525 <b>09 YX</b>	AT28C256-35LM/883
	5962-88525 <b>09 ZX</b>	AT28C256-35FM/883
	5962-88525 <b>10 UX</b>	AT28C256-30UM/883
	5962-88525 <b>10 XX</b>	AT28C256-30DM/883
	5962-88525 <b>10 YX</b>	AT28C256-30LM/883
	5962-88525 <b>10 ZX</b>	AT28C256-30FM/883
	5962-88525 <b>11 UX</b>	AT28C256-25UM/883
	5962-88525 <b>11 XX</b>	AT28C256-25DM/883
	5962-88525 <b>11 YX</b>	AT28C256-25LM/883
	5962-88525 <b>11 ZX</b>	AT28C256-25FM/883
	5962-88525 <b>12 UX</b>	AT28C256-20UM/883
	5962-88525 <b>12 XX</b>	AT28C256-20DM/883
	5962-88525 <b>12 YX</b>	AT28C256-20LM/883
	5962-88525 <b>12 ZX</b>	AT28C256-20FM/883
	5962-88525 <b>14 UX</b>	AT28C256-15UM/883
	5962-88525 <b>14 XX</b>	AT28C256-15DM/883
	5962-88525 <b>14 YX</b>	AT28C256-15LM/883
	5962-88525 <b>14 ZX</b>	AT28C256-15FM/883
<b>Case Outline</b>		
<b>U</b>	28U, 28 Pin, Ceramic Pin Grid Array (PGA)	
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)	
<b>Y</b>	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)	
<b>Z</b>	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)	
<b>Lead Finish</b>		
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)	
<b>A</b>	Hot Solder Dip	



**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C256E</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C256E	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-88525	05	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
	5962-88525	08	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
	5962-88525	13 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
	5962-88525	16 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-88525 <b>05 UX</b>				AT28C256E-25UM/883				
	5962-88525 <b>05 XX</b>				AT28C256E-25DM/883				
	5962-88525 <b>05 YX</b>				AT28C256E-25LM/883				
	5962-88525 <b>05 ZX</b>				AT28C256E-25FM/883				
	5962-88525 <b>08 UX</b>				AT28C256E-15UM/883				
	5962-88525 <b>08 XX</b>				AT28C256E-15DM/883				
	5962-88525 <b>08 YX</b>				AT28C256E-15LM/883				
	5962-88525 <b>08 ZX</b>				AT28C256E-15FM/883				
	5962-88525 <b>13 UX</b>				AT28C256E-25UM/883				
	5962-88525 <b>13 XX</b>				AT28C256E-25DM/883				
	5962-88525 <b>13 YX</b>				AT28C256E-25LM/883				
	5962-88525 <b>13 ZX</b>				AT28C256E-25FM/883				
	5962-88525 <b>16 UX</b>				AT28C256E-15UM/883				
	5962-88525 <b>16 XX</b>				AT28C256E-15DM/883				
	5962-88525 <b>16 YX</b>				AT28C256E-15LM/883				
5962-88525 <b>16 ZX</b>				AT28C256E-15FM/883					

<b>Case Outline</b>	
<b>U</b>	28U, 28 Pin, Ceramic Pin Grid Array (PGA)
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)
<b>Y</b>	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)
<b>Z</b>	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)
<b>Lead Finish</b>	
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)
<b>A</b>	Hot Solder Dip

Note: 1. SMD specifies Software Data Protection feature for device type, although Atmel product supplied to every device type on the SMD is 100% tested for this feature.





**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C256F</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C256F	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-88525	07	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
	5962-88525	15 <sup>(1)</sup>	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-88525 <b>07 UX</b>				AT28C256F-15UM/883				
	5962-88525 <b>07 XX</b>				AT28C256F-15DM/883				
	5962-88525 <b>07 YX</b>				AT28C256F-15LM/883				
	5962-88525 <b>07 ZX</b>				AT28C256F-15FM/883				
	5962-88525 <b>15 UX</b>				AT28C256F-15UM/883				
	5962-88525 <b>15 XX</b>				AT28C256F-15DM/883				
	5962-88525 <b>15 YX</b>				AT28C256F-15LM/883				
	5962-88525 <b>15 ZX</b>				AT28C256F-15FM/883				
<b>Case Outline</b>									
<b>U</b>	28U, 28 Pin, Ceramic Pin Grid Array (PGA)								
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)								
<b>Y</b>	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
<b>Z</b>	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)								
<b>Lead Finish</b>									
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)								
<b>A</b>	Hot Solder Dip								

Note: 1. SMD specifies Software Data Protection feature for device type, although Atmel product supplied to every device type on the SMD is 100% tested for this feature.

**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28HC256</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28HC256	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-88634	01	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	10	10K
	5962-88634	03	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	10	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-88634 <b>01 UX</b>				AT28HC256-12UM/883				
	5962-88634 <b>01 XX</b>				AT28HC256-12DM/883				
	5962-88634 <b>01 YX</b>				AT28HC256-12LM/883				
	5962-88634 <b>01 ZX</b>				AT28HC256-12FM/883				
	5962-88634 <b>03 UX</b>				AT28HC256-90UM/883				
	5962-88634 <b>03 XX</b>				AT28HC256-90DM/883				
	5962-88634 <b>03 YX</b>				AT28HC256-90LM/883				
5962-88634 <b>03 ZX</b>				AT28HC256-90FM/883					
<b>Case Outline</b>									
<b>U</b>	28U, 28 Pin, Ceramic Pin Grid Array (PGA)								
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)								
<b>Y</b>	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
<b>Z</b>	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)								
<b>Lead Finish</b>									
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)								
<b>A</b>	Hot Solder Dip								



**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28HC256F</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28HC256F	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Speed(ms)	Endurance (Cycles)
	5962-88634	02	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	3	10K
	5962-88634	04	U, X, Y, Z	X, A	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	3	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-88634 <b>02 UX</b>				AT28HC256F-12UM/883				
	5962-88634 <b>02 XX</b>				AT28HC256F-12DM/883				
	5962-88634 <b>02 YX</b>				AT28HC256F-12LM/883				
	5962-88634 <b>02 ZX</b>				AT28HC256F-12FM/883				
	5962-88634 <b>04 UX</b>				AT28HC256F-90UM/883				
	5962-88634 <b>04 XX</b>				AT28HC256F-90DM/883				
	5962-88634 <b>04 YX</b>				AT28HC256F-90LM/883				
5962-88634 <b>04 ZX</b>				AT28HC256F-90FM/883					
<b>Case Outline</b>									
<b>U</b>	28U, 28 Pin, Ceramic Pin Grid Array (PGA)								
<b>X</b>	28D6, 28 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)								
<b>Y</b>	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
<b>Z</b>	28F, 28 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)								
<b>Lead Finish</b>									
<b>X</b>	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)								
<b>A</b>	Hot Solder Dip								

**Table 1.** Atmel SMD Part Types, Listed by Atmel Part Number

<b>AT28C010</b>									
Generic Number	Standard Microcircuit Drawing Number				Description				
28C010	Drawing Number	Device Type	Case Outline	Lead Finish	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd(ms)	Endurance (Cycles)
	5962-38267	01	T, U, X, Y, Z	X, A	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	250	10	10K
	5962-38267	03	T, U, X, Y, Z	X, A	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	200	10	10K
	5962-38267	05	T, U, X, Y, Z	X, A	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	150	10	10K
	5962-38267	07	U, X, Y, Z	X, A	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	120	10	10K
Atmel Cage No. 1FN41	Example: Atmel Order Number				Atmel Similar Part Number				
	5962-38267 <b>01M TX</b>				AT28C010-25UM/883				
	5962-38267 <b>01M UX</b>				AT28C010-25EM/883				
	5962-38267 <b>01M XX</b>				AT28C010-25DM/883				
	5962-38267 <b>01M YX</b>				AT28C010-25LM/883				
	5962-38267 <b>01M ZX</b>				AT28C010-25FM/883				
	5962-38267 <b>03M TX</b>				AT28C010-20UM/883				
	5962-38267 <b>03M UX</b>				AT28C010-20EM/883				
	5962-38267 <b>03M XX</b>				AT28C010-20DM/883				
	5962-38267 <b>03M YX</b>				AT28C010-20LM/883				
	5962-38267 <b>03M ZX</b>				AT28C010-20FM/883				
	5962-38267 <b>05M TX</b>				AT28C010-15UM/883				
	5962-38267 <b>05M UX</b>				AT28C010-15EM/883				
	5962-38267 <b>05M XX</b>				AT28C010-15DM/883				
	5962-38267 <b>05M YX</b>				AT28C010-15LM/883				
	5962-38267 <b>05M ZX</b>				AT28C010-15FM/883				
	5962-38267 <b>07M UX</b>				AT28C010-12EM/883				
	5962-38267 <b>07M XX</b>				AT28C010-12DM/883				
5962-38267 <b>07M YX</b>				AT28C010-12LM/883					
5962-38267 <b>07M ZX</b>				AT28C010-12FM/883					
<b>Case Outline</b>									
T	30U, 30 Pin, Ceramic Pin Grid Array (PGA)								
U	32L, 32 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
X	32D6, 32 Lead, 0.600" Wide, Non-Windowed, Ceramic Dual Inline Package (Cerdip)								
Y	44L, 44 Pad, Non-Windowed, Ceramic Leadless Chip Carrier (LCC)								
Z	32F, 32 Lead, Non-Windowed, Ceramic Bottom-Brazed Flat Package (Flatpack)								
<b>Lead Finish</b>									
X	Denotes no preference in lead finish; Finish A will be supplied (per paragraph 30.6.2.7 of MIL-I-38535B Appendix A)								
A	Hot Solder Dip								





**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-38267</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-38267 01M XX	AT28C010-25DM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	250	10	10K
5962-38267 01M YX	AT28C010-25LM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	250	10	10K
5962-38267 01M ZX	AT28C010-25FM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	250	10	10K
5962-38267 03M XX	AT28C010-20DM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	200	10	10K
5962-38267 03M YX	AT28C010-20LM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	200	10	10K
5962-38267 03M ZX	AT28C010-20FM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	200	10	10K
5962-38267 05M XX	AT28C010-15DM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	150	10	10K
5962-38267 05M YX	AT28C010-15LM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	150	10	10K
5962-38267 05M ZX	AT28C010-15FM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	150	10	10K
5962-38267 07M XX	AT28C010-12DM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	120	10	10K
5962-38267 07M YX	AT28C010-12LM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	120	10	10K
5962-38267 07M ZX	AT28C010-12FM/883	128K x 8, 1M bit E <sup>2</sup> PROM Data Polling	Byte/ Page	120	10	10K

**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-87514</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-87514 08 XX	AT28C64B-25DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-87514 09 XX	AT28C64B-20DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-87514 10 XX	AT28HC64B-12DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	2	10K
5962-87514 11 XX	AT28HC64B-90DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	2	10K
5962-87514 12 XX	AT28HC64B-70DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	70	2	10K
5962-87514 13 XX	AT28C64-35DM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	350	1	10K
5962-87514 13 YX	AT28C64-35LM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	350	1	10K
5962-87514 13 ZX	AT28C64-35FM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	350	1	10K
5962-87514 14 XX	AT28C64-30DM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	300	1	10K
5962-87514 14 YX	AT28C64-30LM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	300	1	10K
5962-87514 15 XX	AT28C64-25DM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	250	1	10K
5962-87514 15 YX	AT28C64-25LM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	250	1	10K
5962-87514 15 ZX	AT28C64-25FM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	250	1	10K
5962-87514 16 XX	AT28C64-20DM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	200	1	10K
5962-87514 16 YX	AT28C64-20LM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	200	1	10K
5962-87514 17 XX	AT28C64-15DM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	150	1	10K
5962-87514 17 YX	AT28C64-15LM/883	8K x 8 E <sup>2</sup> PROM Rdy/Bus $\bar{y}$	Byte	150	1	10K
5962-87514 18 XX	AT28C64X-35DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	350	1	10K
5962-87514 18 YX	AT28C64X-35LM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	350	1	10K

(continued)



**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-87514 (Continued)</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-87514 19 XX	AT28C64X-30DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	300	1	10K
5962-87514 19 YX	AT28C64X-30LM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	300	1	10K
5962-87514 20 XX	AT28C64X-25DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	250	1	10K
5962-87514 20 YX	AT28C64X-25LM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	250	1	10K
5962-87514 20 ZX	AT28C64X-25FM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	250	1	10K
5962-87514 21 XX	AT28C64X-20DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	200	1	10K
5962-87514 21 YX	AT28C64X-20LM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	200	1	10K
5962-87514 22 XX	AT28C64X-15DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	150	1	10K
5962-87514 22 YX	AT28C64X-15LM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	150	1	10K
5962-87514 28 XX	AT28C64F-20DM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	200	0.2	10K
5962-87514 28 YX	AT28C64X-20LM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	200	0.2	10K
5962-87514 28 ZX	AT28C64X-20FM/883	8K x 8 E <sup>2</sup> PROM Data Polling	Byte	200	0.2	10K



**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-88525</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-88525 01 UX	AT28C256-35UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
5962-88525 01 XX	AT28C256-35DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
5962-88525 01 YX	AT28C256-35LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte Page	350	10	10K
5962-88525 01 ZX	AT28C256-35FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
5962-88525 02 UX	AT28C256-30UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
5962-88525 02 XX	AT28C256-30DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
5962-88525 02 YX	AT28C256-30LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
5962-88525 02 ZX	AT28C256-30FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
5962-88525 03 UX	AT28C256-25UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 03 XX	AT28C256-25DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 03 YX	AT28C256-25LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 03 ZX	AT28C256-25FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 04 UX	AT28C256-20UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 04 XX	AT28C256-20DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 04 YX	AT28C256-20LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 04 ZX	AT28C256-20FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 05 UX	AT28C256E-25UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
5962-88525 05 XX	AT28C256E-25DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
5962-88525 05 YX	AT28C256E-25LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
5962-88525 05 ZX	AT28C256E-25FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K

(continued)



**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-88525 (Continued)</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-88525 06 UX	AT28C256-15UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 06 XX	AT28C256-15DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 06 YX	AT28C256-15LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 06 ZX	AT28C256-15FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 07 UX	AT28C256F-15UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
5962-88525 07 XX	AT28C256F-15DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
5962-88525 07 YX	AT28C256F-15LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
5962-88525 07 ZX	AT28C256F-15FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
5962-88525 08 UX	AT28C256E-15UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
5962-88525 08 XX	AT28C256E-15DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
5962-88525 08 YX	AT28C256E-15LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
5962-88525 08 ZX	AT28C256E-15FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
5962-88525 09 UX <sup>(1)</sup>	AT28C256-35UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
5962-88525 09 XX <sup>(1)</sup>	AT28C256-35DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
5962-88525 09 YX <sup>(1)</sup>	AT28C256-35LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
5962-88525 09 ZX <sup>(1)</sup>	AT28C256-35FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	350	10	10K
5962-88525 10 UX <sup>(1)</sup>	AT28C256-30UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
5962-88525 10 XX <sup>(1)</sup>	AT28C256-30DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
5962-88525 10 YX <sup>(1)</sup>	AT28C256-30LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K
5962-88525 10 ZX <sup>(1)</sup>	AT28C256-30FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	300	10	10K

(continued)

**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-88525 (Continued)</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-88525 11 UX <sup>(1)</sup>	AT28C256-25UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 11 XX <sup>(1)</sup>	AT28C256-25DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 11 YX <sup>(1)</sup>	AT28C256-25LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 11 ZX <sup>(1)</sup>	AT28C256-25FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	10K
5962-88525 12 UX <sup>(1)</sup>	AT28C256-20UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 12 XX <sup>(1)</sup>	AT28C256-20DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 12 YX <sup>(1)</sup>	AT28C256-20LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 12 ZX <sup>(1)</sup>	AT28C256-20FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	200	10	10K
5962-88525 13 UX <sup>(1)</sup>	AT28C256E-25UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
5962-88525 13 XX <sup>(1)</sup>	AT28C256E-25DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
5962-88525 13 YX <sup>(1)</sup>	AT28C256E-25LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
5962-88525 13 ZX <sup>(1)</sup>	AT28C256E-25FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	250	10	100K
5962-88525 14 UX <sup>(1)</sup>	AT28C256-15UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 14 XX <sup>(1)</sup>	AT28C256-15DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 14 YX <sup>(1)</sup>	AT28C256-15LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 14 ZX <sup>(1)</sup>	AT28C256-15FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	10K
5962-88525 15 UX <sup>(1)</sup>	AT28C256F-15UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
5962-88525 15 XX <sup>(1)</sup>	AT28C256F-15DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
5962-88525 15 YX <sup>(1)</sup>	AT28C256F-15LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K
5962-88525 15 ZX <sup>(1)</sup>	AT28C256F-15FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	3	10K

(continued)



**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-88525 (Continued)</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-88525 16 UX <sup>(1)</sup>	AT28C256E-15UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
5962-88525 16 XX <sup>(1)</sup>	AT28C256E-15DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
5962-88525 16 YX <sup>(1)</sup>	AT28C256E-15LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K
5962-88525 16 ZX <sup>(1)</sup>	AT28C256E-15FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	150	10	100K

**Table 2.** Atmel SMD Part Types, Listed by SMD Number

<b>5962-88634</b>						
Atmel Order Number	Atmel Similar Part Number	Circuit Description End Write Indicator	Write Mode	Access Time(ns)	Write Spd. (ms)	Endur. (Cycles)
5962-88634 01 UX	AT28HC256-12UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	10	10K
5962-88634 01 XX	AT28HC256-12DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	10	10K
5962-88634 01 YX	AT28HC256-12LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	10	10K
5962-88634 01 ZX	AT28HC256-12FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	10	10K
5962-88634 02 UX	AT28HC256F-12UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	3	10K
5962-88634 02 XX	AT28HC256F-12DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	3	10K
5962-88634 02 YX	AT28HC256F-12LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	3	10K
5962-88634 02 ZX	AT28HC256F-12FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	120	3	10K
5962-88634 03 UX	AT28HC256-90UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	10	10K
5962-88634 03 XX	AT28HC256-90DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	10	10K
5962-88634 03 YX	AT28HC256-90LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	10	10K
5962-88634 03 ZX	AT28HC256-90FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	10	10K
5962-88634 04 UX	AT28HC256F-90UM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	3	10K
5962-88634 04 XX	AT28HC256F-90DM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	3	10K
5962-88634 04 YX	AT28HC256F-90LM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	3	10K
5962-88634 04 ZX	AT28HC256F-90FM/883	32K x 8 E <sup>2</sup> PROM Data Polling	Byte/Page	90	3	10K