


10/100 PC CARD LAN MAGNETICS SOLUTIONS

P/N: NS0013B LF DATA SHEET

Page : 1/2

Feature

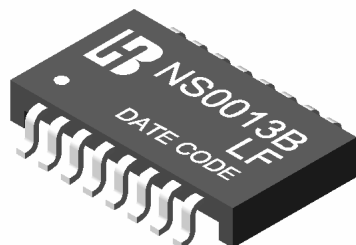

- Half port and single port designs for maximum layout flexibility.
- Low profile packages from 0.094 Inch(2.39mm) to 0.078 Inch(1.98mm) for PC card and card bus applications .
- Comply with RoHS requirements-whole part No Cd, No Hg, No Cr6+, No PBB and PBDE and No Pb on external pins.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±3%)		OCL (uH Min) @ 100KHz/0.1V Pin(1-3/6-8)	C _{ww} (pF Max)	L.L (uH Max)	DCR (Ω Max)	HI-POT (Vrms)
	RX	TX				Pin(1-3/6-8)	
NS0013B LF	1CT:1CT	1CT:1CT	350	15	0.4	0.9	1500

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)				Cross talk (dB Min)	DCMR (dB Min)	
	0.3-100MHz	0.3-30MHz	40MHz	50MHz	60-80MHz	0.3-100MHz	0.3-60MHz	60-100MHz
NS0013B LF	-1.1	-18	-15.5	-13.5	-10	-38	-33	-26

Schematic

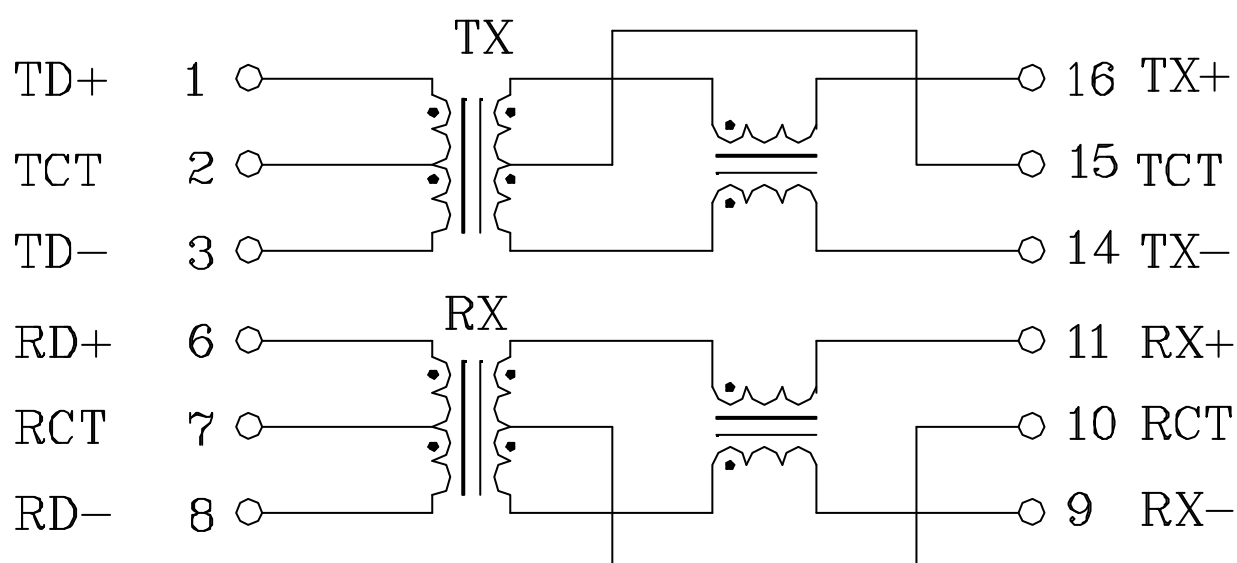


A3(07/10)

10/100 PC CARD LAN MAGNETICS SOLUTIONS

P/N: NS0013B LF DATA SHEET

Page : 2/2

Mechanical

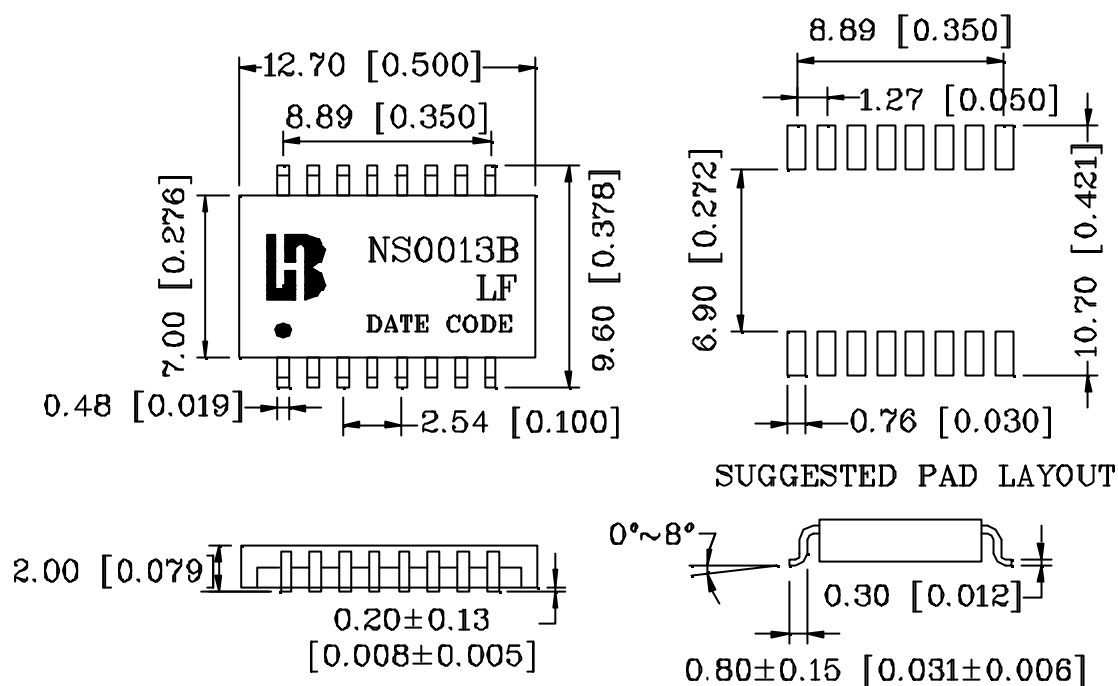

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]

0.xx±0.05[0.002]