


CTMC1210 Series

From .10 μ H to 330 μ H

ENGINEERING KIT # 12F

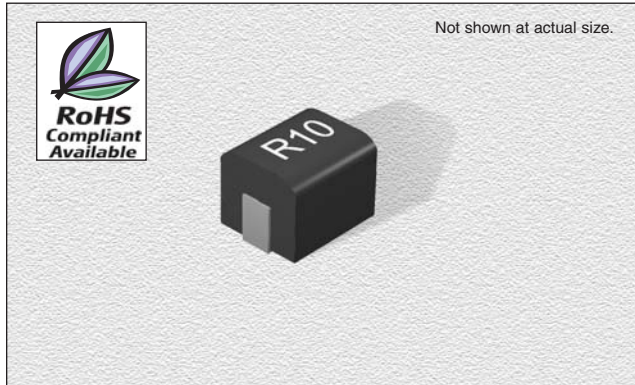

CHARACTERISTICS

Description: Ferrite core, wire-wound molded chip inductor

Applications: TVs, VCRs, disk drives, computer peripherals, telecommunication devices and electronic control boards for automobiles

Operating Temperature: -40°C to +100°C

Inductance Tolerance: $\pm 5\%$, $\pm 10\%$ & $\pm 20\%$

Testing: Inductance and Q are tested on a HP4285A or a HP4286A at a specified frequency

Packaging: Tape & Reel

Part Marking: Inductance code or inductance code plus tolerance.


Miscellaneous: RoHS Compliant available.

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

PHYSICAL DIMENSIONS

Size	A	B	C	D	E	F
mm	3.2 $\pm$ 0.3	2.5 $\pm$ 0.2	2.2 $\pm$ 0.2	1.0 $\pm$ 0.4	2.9 $\pm$ 0.2	0.6
inches	.13 $\pm$ 0.012	.10 $\pm$ 0.008	.09 $\pm$ 0.008	.04 $\pm$ 0.016	.11 $\pm$ 0.008	.02

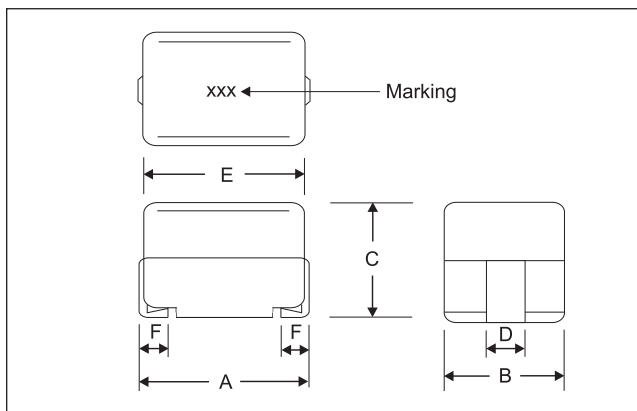

SPECIFICATIONS

Please specify tolerance code when ordering.
 CTMC1210-R010_ $\leftarrow$ J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$
 CTMC1210F Please specify "F" for Lead Free

Part Number	Inductance (μ H)	L Test Freq. (MHz)	Q Fact. Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)
CTMC1210_-R10_	.10	100	28	100	700	.44	450
CTMC1210_-R12_	.12	25.2	30	25.2	500	.22	450
CTMC1210_-R15_	.15	25.2	30	25.2	450	.25	450
CTMC1210_-R18_	.18	25.2	30	25.2	400	.28	450
CTMC1210_-R22_	.22	25.2	30	25.2	350	.32	450
CTMC1210_-R27_	.27	25.2	30	25.2	320	.36	450
CTMC1210_-R33_	.33	25.2	30	25.2	300	.40	450
CTMC1210_-R39_	.39	25.2	30	25.2	250	.45	450
CTMC1210_-R47_	.47	25.2	30	25.2	220	.50	450
CTMC1210_-R56_	.56	25.2	30	25.2	180	.55	450
CTMC1210_-R68_	.68	25.2	30	25.2	160	.60	450
CTMC1210_-R82_	.82	25.2	30	25.2	140	.65	450
CTMC1210_-1R0_	1.0	7.96	30	7.96	120	.70	400
CTMC1210_-1R2_	1.2	7.96	30	7.96	100	.75	390
CTMC1210_-1R5_	1.5	7.96	30	7.96	85	.85	370
CTMC1210_-1R8_	1.8	7.96	30	7.96	80	.90	350
CTMC1210_-2R2_	2.2	7.96	30	7.96	75	1.0	320
CTMC1210_-2R7_	2.7	7.96	30	7.96	70	1.1	290
CTMC1210_-3R3_	3.3	7.96	30	7.96	60	1.2	260
CTMC1210_-3R9_	3.9	7.96	30	7.96	55	1.3	250
CTMC1210_-4R7_	4.7	7.96	30	7.96	50	1.5	220
CTMC1210_-5R6_	5.6	7.96	30	7.96	47	1.6	200
CTMC1210_-6R8_	6.8	7.96	30	7.96	43	1.8	180
CTMC1210_-8R2_	8.2	7.96	30	7.96	40	2.0	170
CTMC1210_-100_	10	2.52	30	2.52	36	2.1	150
CTMC1210_-120_	12	2.52	30	2.52	33	2.5	140
CTMC1210_-150_	15	2.52	30	2.52	30	2.8	130
CTMC1210_-180_	18	2.52	30	2.52	27	3.3	120
CTMC1210_-220_	22	2.52	30	2.52	25	3.7	110
CTMC1210_-270_	27	2.52	30	2.52	20	5.0	80
CTMC1210_-330_	33	2.52	30	2.52	17	5.6	70
CTMC1210_-390_	39	2.52	30	2.52	16	6.4	65
CTMC1210_-470_	47	2.52	30	2.52	15	7.0	60
CTMC1210_-560_	56	2.52	30	2.52	13	8.0	55
CTMC1210_-680_	68	2.52	30	2.52	12	9.0	50
CTMC1210_-820_	82	2.52	30	2.52	11	10	45
CTMC1210_-101_	100	.796	20	.796	10	10	40
CTMC1210_-121_	120	.796	20	.796	10	11	70
CTMC1210_-151_	150	.796	20	.796	8.0	15	65
CTMC1210_-181_	180	.796	20	.796	7.0	17	60
CTMC1210_-221_	220	.796	20	.796	7.0	21	50
CTMC1210_-271_	270	.796	20	.796	6.0	28	45
CTMC1210_-331_	330	.796	20	.796	5.0	34	40

05.12.10