


Features

High Current Capability
 Surge Overload Rating to 125A Peak
 High Case Dielectric Strength of 1500V
 Ideal for Printed Circuit Board Application
 UL Listed: Recognized Component Index,
 File Number E94661

Mechanical Data

Case: PBPC-6
 Case Material: Molded Plastic. UL Flammability
 Classification Rating 94V-0
 Moisture Sensitivity: Level 1 per J-STD-020C
 Terminals: Plated Leads Solderable per MIL-STD-202,
 Method 208
 Polarity: Marked on Body
 Mounting: Through Hole for #6 Screw
 Mounting Torque: 5.0 Inch-pounds Maximum
 Ordering Information: See Last Page
 Marking: Type Number
 Weight: 3.8 grams (approximate)

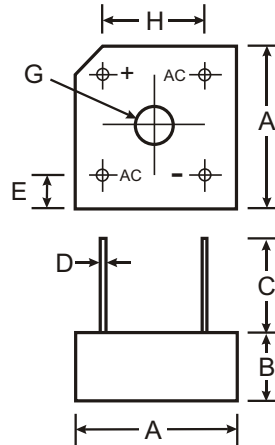

PBPC-6		
Dim	Min	Max
A	14.73	15.75
B	5.84	6.86
C	19.00	
D	1.01	Typical
E	1.70	3.20
G	Hole for #6 screw	
	3.60	4.00
H	10.30	11.30
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25 °C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	PBPC 601	PBPC 602	PBPC 603	PBPC 604	PBPC 605	PBPC 606	PBPC 607	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1) @ T _C = 50 °C (Note 2) @ T _C = 50 °C	I_O	6.0 4.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	125							A
Forward Voltage (per element) @ I _F = 3.0A	V_{FM}	1.1							V
Peak Reverse Current @ T _C = 25 °C at Rated DC Blocking Voltage (per element) @ T _C = 100 °C	I_R	10 1.0							A mA
I ² t Rating for Fusing (t < 8.3ms) (Note 3)	I^2t	64							A ² s
Typical Total Capacitance (Note 4)	C_T	55							pF
Typical Thermal Resistance Junction to Case (per element)	R_{JC}	12.5							C/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +125							°C

- Notes:
1. Mounted on metal chassis.
 2. Mounted on PC board FR-4 material.
 3. Non-repetitive, for t > 1.0ms and < 8.3ms.
 4. Per element, measured at f = 1.0MHz and applied reverse voltage of V_R = 4.0V DC.

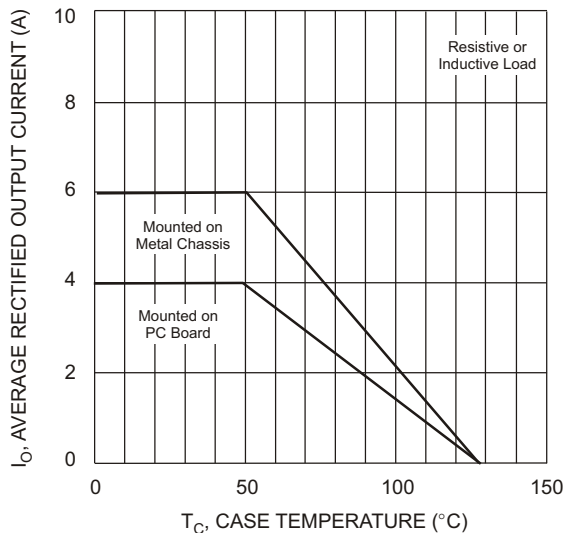


Fig. 1 Forward Current Derating Curve

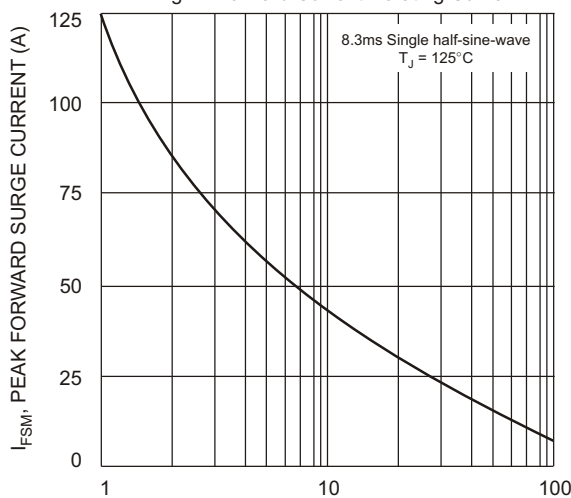


Fig. 3 Peak Forward Surge Current

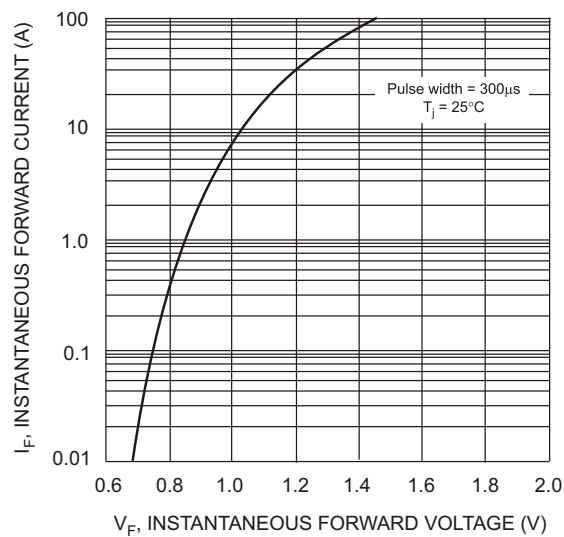


Fig. 2 Typical Forward Characteristics

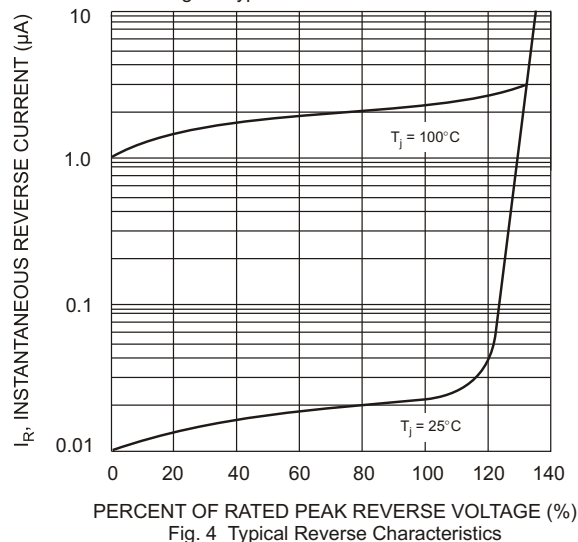


Fig. 4 Typical Reverse Characteristics

Ordering Information (Note 5)

Device	Packaging	Shipping
PBPC601	PBPC-6	200/Box
PBPC602	PBPC-6	200/Box
PBPC603	PBPC-6	200/Box
PBPC604	PBPC-6	200/Box
PBPC605	PBPC-6	200/Box
PBPC606	PBPC-6	200/Box
PBPC607	PBPC-6	200/Box

Notes: 5. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02008.pdf>.

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.