



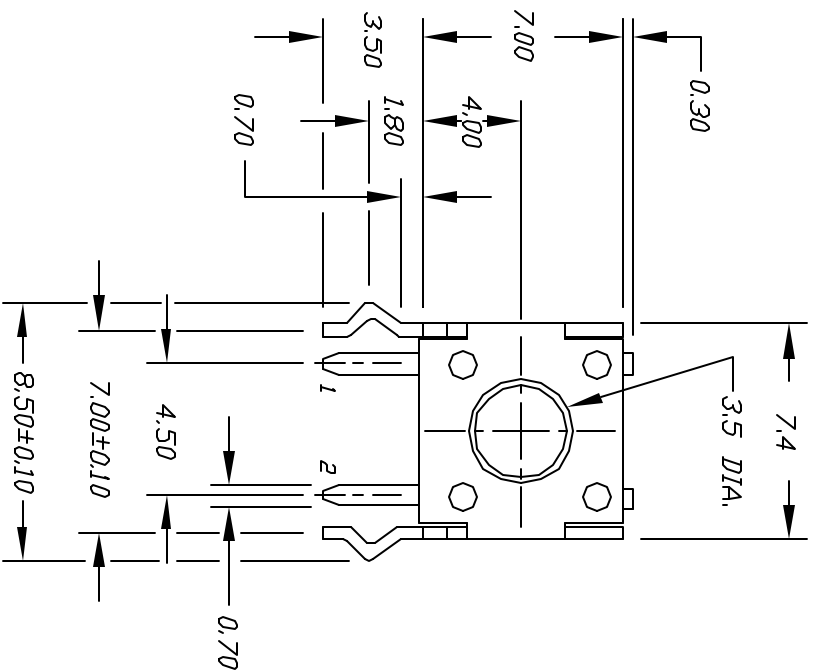

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: DC 12V, 50mA
4. TRAVEL: 0.25±0.1mm
5. CONTACT RESISTANCE: 100m Ohms Max.
6. LIFE: 100,000 CYCLES Min.
7. INSULATION RESISTANCE: 100M Ohms Min.
8. DIELECTRIC STRENGTH: 250 V RMS Min.

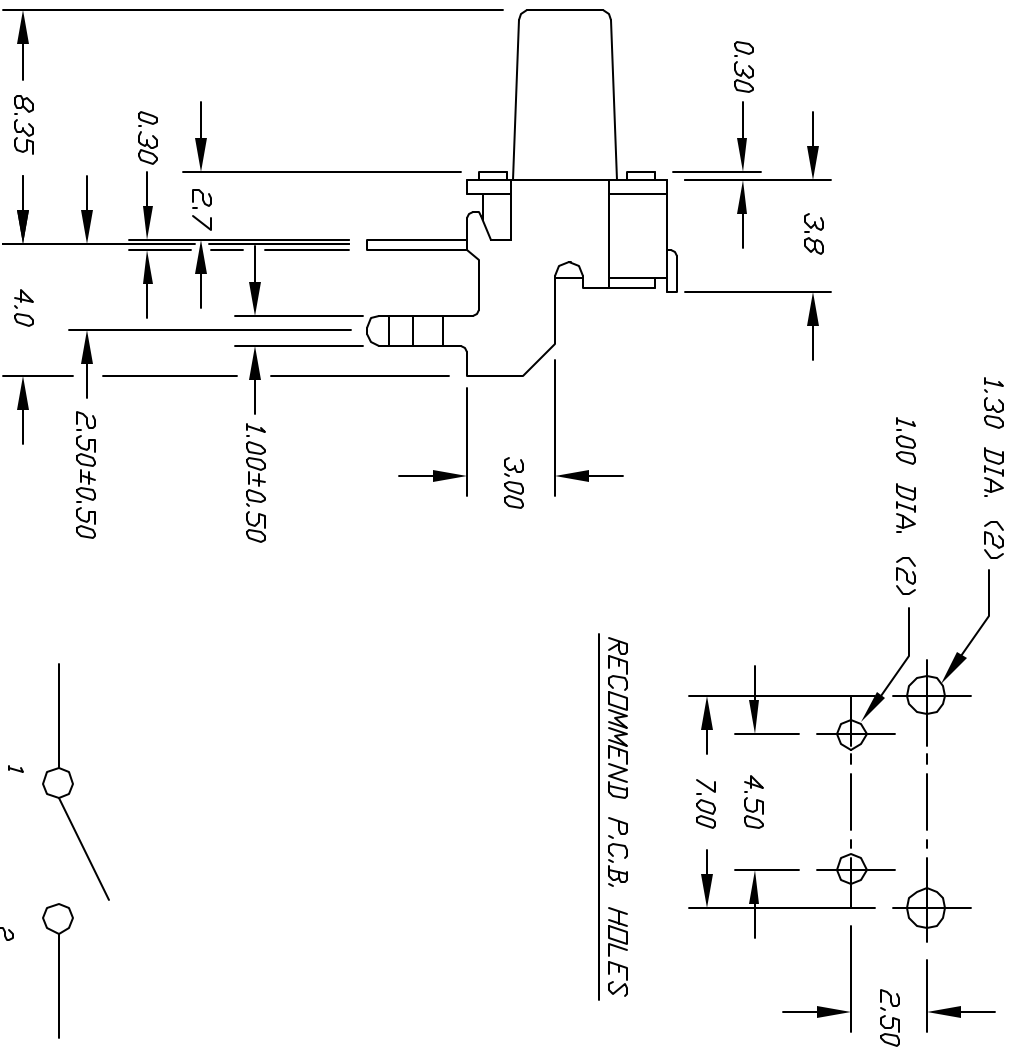

TOLERANCES		TITLE	
0.0	±0.4	TL 1105 S F250 Q (STD. BRCKT)	
0.00	±0.25		
A		RELEASED FOR PRODUCTION	CHKD
REV.		DESCRIPTION	DATE
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED	
		SCALE	DATE
		4:1	7/2/98
		DR	MM
		DWG	P021300
		REV	A