


PUSHBUTTON SWITCHES

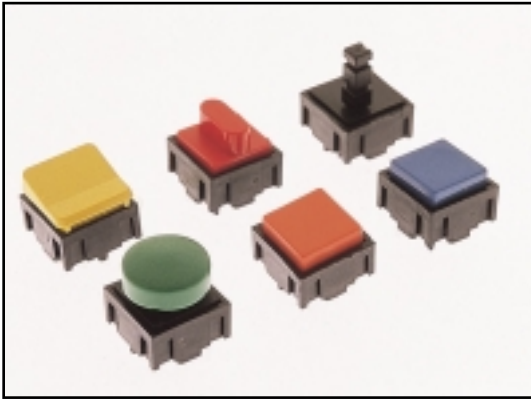


SPECIFICATIONS

Rating:	25mA @ 50 VDC
Electrical Life:	1,000,000 cycles typical
Contact Resistance:	10mΩ, max. typical @ 2-4 VDC, 100mA
Insulation Resistance:	1,000MΩ min.
Dielectric Strength:	>1,000 V rms at sea level
Operating Force:	120 ± 50 gf

MATERIALS

Housing:	Nylon 6/6
Cover/Cap:	ABS or Polycarbonate
Dome Contact:	Gold over stainless steel
Terminals/Contacts:	Silver plated copper alloy

HOW TO ORDER

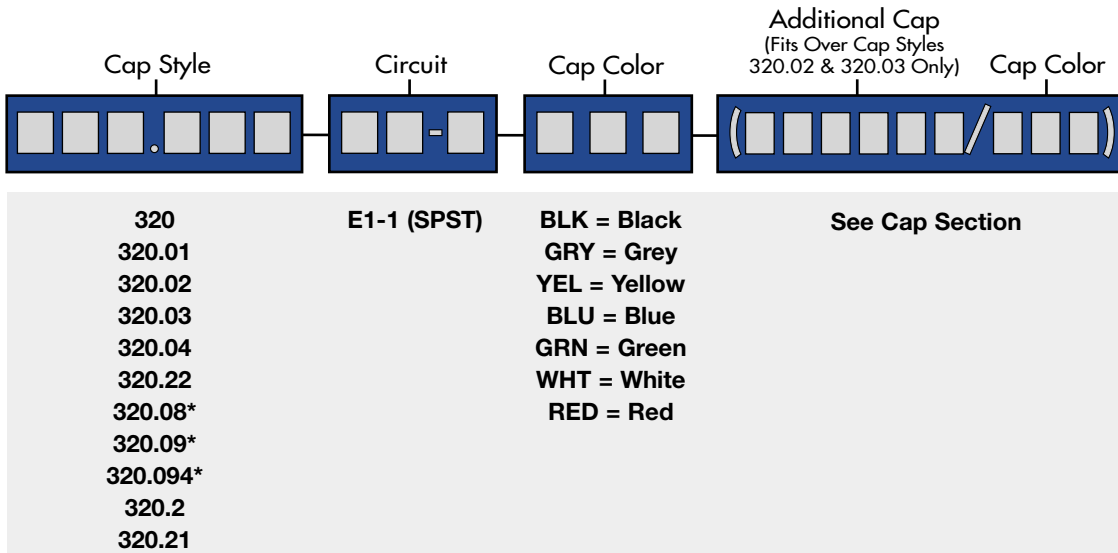

*Assembled Using the 320.02 plungered cap.

EXAMPLE


320.08 → E1-1 → YEL

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.





320

P.C. MOUNTING

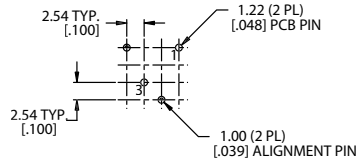


Schematic





320.01

P.C. MOUNTING

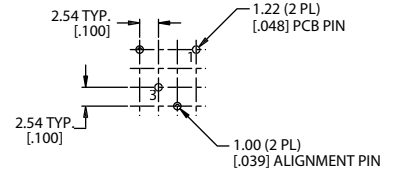


Schematic





320.02

P.C. MOUNTING

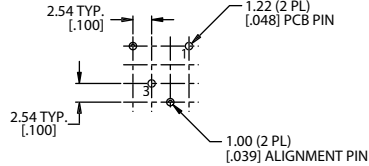


Schematic





320.03

P.C. MOUNTING

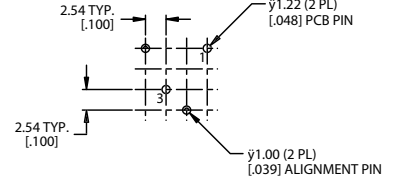

Schematic




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.





320.04

P.C. MOUNTING

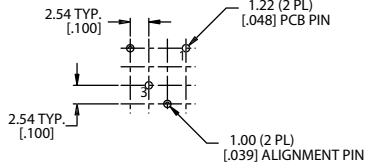


Schematic





320.22

P.C. MOUNTING


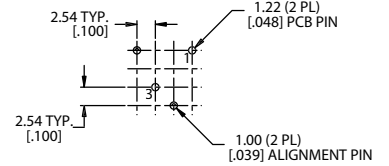


Schematic

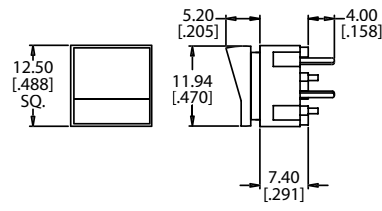


SERIES 320 SWITCHES




PUSHBUTTON SWITCHES

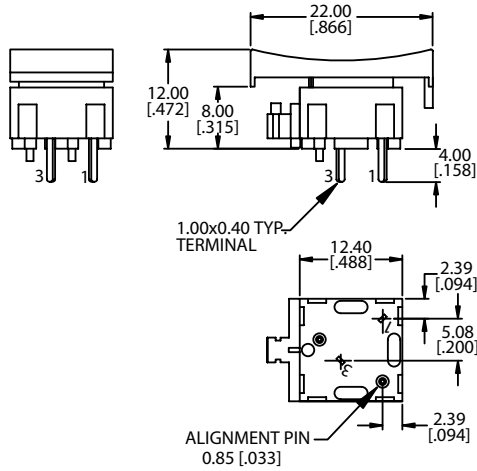


P.C. MOUNTING




Schematic

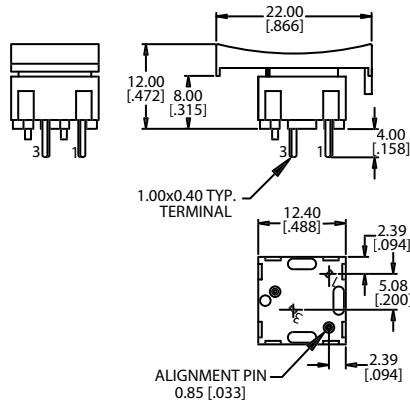




P.C. MOUNTING

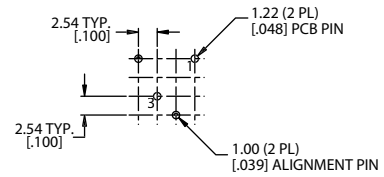

Schematic



SNAP-ON CAPS FOR 320.02 PLUNGER

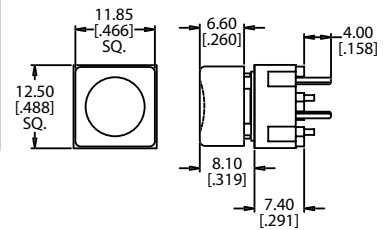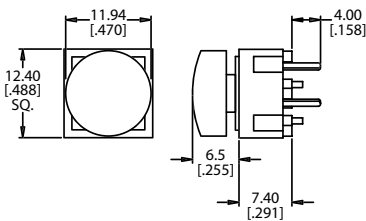

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.