

## DM74LS74A Dual Positive-Edge-Triggered D Flip-Flops with Preset, Clear and Complementary Outputs

### General Description


This device contains two independent positive-edge-triggered D flip-flops with complementary outputs. The information on the D input is accepted by the flip-flops on the positive going edge of the clock pulse. The triggering occurs at a voltage level and is not directly related to the transition time of the rising edge of the clock. The data on the D input may be changed while the clock is low or high without affecting the outputs as long as the data setup and

hold times are not violated. A low logic level on the preset or clear inputs will set or reset the outputs regardless of the logic levels of the other inputs.

### Features

- Alternate military/aerospace device (54LS74) is available. Contact a Fairchild Semiconductor Sales Office/Distributor for specifications.

### Connection Diagram

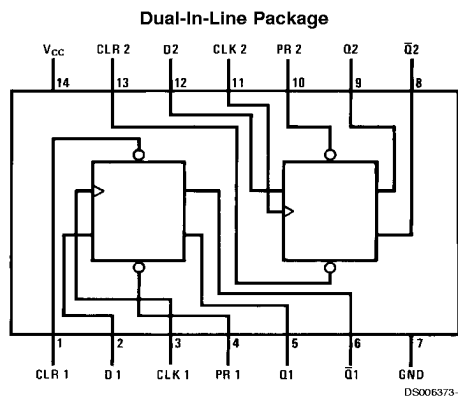

Order Number 54LS74DMQB, 54LS74FMQB, 54LS74LMQB,  
DM54LS74AJ, DM54LS74AW, DM74LS74AM or DM74LS74AN  
See Package Number E20A, J14A, M14A, N14A or W14B

### Function Table

| Inputs |     |     |   | Outputs    |             |
|--------|-----|-----|---|------------|-------------|
| PR     | CLR | CLK | D | Q          | $\bar{Q}$   |
| L      | H   | X   | X | H          | L           |
| H      | L   | X   | X | L          | H           |
| L      | L   | X   | X | H (Note 1) | H (Note 1)  |
| H      | H   | ↑   | H | H          | L           |
| H      | H   | ↑   | L | L          | H           |
| H      | H   | L   | X | $Q_0$      | $\bar{Q}_0$ |

H = High Logic Level  
X = Either Low or High Logic Level  
L = Low Logic Level  
↑ = Positive-going Transition

$Q_0$  = The output logic level of Q before the indicated input conditions were established.

**Note 1:** This configuration is nonstable; that is, it will not persist when either the preset and/or clear inputs return to their inactive (high) level.

## Absolute Maximum Ratings (Note 2)

Supply Voltage  
Input Voltage  
Operating Free Air Temperature Range

7V  
7V

DM54LS and 54LS  
DM74LS  
Storage Temperature Range

-55°C to +125°C  
0°C to +70°C  
-65°C to +150°C

## Recommended Operating Conditions

| Symbol           | Parameter                      | DM54LS74A  |     |      | DM74LS74A |     |      | Units |
|------------------|--------------------------------|------------|-----|------|-----------|-----|------|-------|
|                  |                                | Min        | Nom | Max  | Min       | Nom | Max  |       |
| V <sub>CC</sub>  | Supply Voltage                 | 4.5        | 5   | 5.5  | 4.75      | 5   | 5.25 | V     |
| V <sub>IH</sub>  | High Level Input Voltage       | 2          |     |      | 2         |     |      | V     |
| V <sub>IL</sub>  | Low Level Input Voltage        |            |     | 0.7  |           |     | 0.8  | V     |
| I <sub>OH</sub>  | High Level Output Current      |            |     | -0.4 |           |     | -0.4 | mA    |
| I <sub>OL</sub>  | Low Level Output Current       |            |     | 4    |           |     | 8    | mA    |
| f <sub>CLK</sub> | Clock Frequency (Note 4)       | 0          |     | 25   | 0         |     | 25   | MHz   |
| f <sub>CLK</sub> | Clock Frequency (Note 5)       | 0          |     | 20   | 0         |     | 20   | MHz   |
| t <sub>w</sub>   | Pulse Width (Note 4)           | Clock High | 18  |      | 18        |     |      | ns    |
|                  |                                | Preset Low | 15  |      | 15        |     |      |       |
|                  |                                | Clear Low  | 15  |      | 15        |     |      |       |
| t <sub>w</sub>   | Pulse Width (Note 5)           | Clock High | 25  |      | 25        |     |      | ns    |
|                  |                                | Preset Low | 20  |      | 20        |     |      |       |
|                  |                                | Clear Low  | 20  |      | 20        |     |      |       |
| t <sub>SU</sub>  | Setup Time (Notes 3, 4)        | 20↑        |     |      | 20↑       |     |      | ns    |
| t <sub>SU</sub>  | Setup Time (Notes 3, 5)        | 25↑        |     |      | 25↑       |     |      | ns    |
| t <sub>H</sub>   | Hold Time (Notes 3, 6)         | 0↑         |     |      | 0↑        |     |      | ns    |
| T <sub>A</sub>   | Free Air Operating Temperature | -55        |     | 125  | 0         |     | 70   | °C    |

**Note 2:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 3:** The symbol (↑) indicates the rising edge of the clock pulse is used for reference.

**Note 4:** C<sub>L</sub> = 15 pF, R<sub>L</sub> = 2 kΩ, T<sub>A</sub> = 25°C, and V<sub>CC</sub> = 5V.

**Note 5:** C<sub>L</sub> = 50 pF, R<sub>L</sub> = 2 kΩ, T<sub>A</sub> = 25°C, and V<sub>CC</sub> = 5V.

**Note 6:** T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5V.

## Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

| Symbol          | Parameter                        | Conditions                                     | Min    | Typ (Note 7) | Max  | Units |
|-----------------|----------------------------------|--|--------|--------------|------|-------|
| V <sub>I</sub>  | Input Clamp Voltage              | V <sub>CC</sub> = Min, I <sub>I</sub> = -18 mA |        |              | -1.5 | V     |
| V <sub>OH</sub> | High Level Output Voltage        | V <sub>CC</sub> = Min, I <sub>OH</sub> = Max   | DM54   | 2.5          | 3.4  | V     |
|                 |                                  | V <sub>IL</sub> = Max, V <sub>IH</sub> = Min   | DM74   | 2.7          | 3.4  |       |
| V <sub>OL</sub> | Low Level Output Voltage         | V <sub>CC</sub> = Min, I <sub>OL</sub> = Max   | DM54   |              | 0.25 | V     |
|                 |                                  | V <sub>IL</sub> = Max, V <sub>IH</sub> = Min   | DM74   |              | 0.35 |       |
|                 |                                  | I <sub>OL</sub> = 4 mA, V <sub>CC</sub> = Min  | DM74   |              | 0.25 |       |
| I <sub>I</sub>  | Input Current @Max Input Voltage | V <sub>CC</sub> = Max<br>V <sub>I</sub> = 7V   | Data   |              | 0.1  | mA    |
|                 |                                  |  | Clock  |              | 0.1  |       |
|                 |                                  |  | Preset |              | 0.2  |       |
|                 |                                  |  | Clear  |              | 0.2  |       |
| I <sub>IH</sub> | High Level Input Current         | V <sub>CC</sub> = Max<br>V <sub>I</sub> = 2.7V | Data   |              | 20   | μA    |
|                 |                                  |  | Clock  |              | 20   |       |
|                 |                                  |  | Clear  |              | 40   |       |
|                 |                                  |  | Preset |              | 40   |       |

## Electrical Characteristics (Continued)

over recommended operating free air temperature range (unless otherwise noted)

| Symbol          | Parameter                    | Conditions                                     | Min    | Typ<br>(Note 7) | Max  | Units |
|-----------------|------------------------------|--|--------|-----------------|------|-------|
| I <sub>IL</sub> | Low Level Input Current      | V <sub>CC</sub> = Max<br>V <sub>I</sub> = 0.4V | Data   |                 | -0.4 | mA    |
|                 |                              |  | Clock  |                 | -0.4 |       |
|                 |                              |  | Preset |                 | -0.8 |       |
|                 |                              |  | Clear  |                 | -0.8 |       |
| I <sub>OS</sub> | Short Circuit Output Current | V <sub>CC</sub> = Max<br>(Note 8)              | DM54   | -20             | -100 | mA    |
|                 |                              |  | DM74   | -20             | -100 |       |
| I <sub>CC</sub> | Supply Current               | V <sub>CC</sub> = Max (Note 9)                 |        | 4               | 8    | mA    |

**Note 7:** All typicals are at V<sub>CC</sub> = 5V, T<sub>A</sub> = 25°C.

**Note 8:** Not more than one output should be shorted at a time, and the duration should not exceed one second. For devices, with feedback from the outputs, where shorting the outputs to ground may cause the outputs to change logic state an equivalent test may be performed where V<sub>O</sub> = 2.25V and 2.125V for DM54 and DM74 series, respectively, with the minimum and maximum limits reduced by one half from their stated values. This is very useful when using automatic test equipment.

**Note 9:** With all outputs open, I<sub>CC</sub> is measured with CLOCK grounded after setting the Q and  $\bar{Q}$  outputs high in turn.


## Switching Characteristics

at V<sub>CC</sub> = 5V and T<sub>A</sub> = 25°C


| Symbol           | Parameter  | From (Input)<br>To (Output) | R <sub>L</sub> = 2 kΩ  |     |                        |     | Units |
|------------------|--|-----------------------------|------------------------|-----|------------------------|-----|-------|
|                  |  |                             | C <sub>L</sub> = 15 pF |     | C <sub>L</sub> = 50 pF |     |       |
|                  |  |                             | Min                    | Max | Min                    | Max |       |
| f <sub>MAX</sub> | Maximum Clock Frequency                            |                             | 25                     |     | 20                     |     | MHz   |
| t <sub>PLH</sub> | Propagation Delay Time<br>Low to High Level Output | Clock to<br>Q or $\bar{Q}$  |                        | 25  |                        | 35  | ns    |
| t <sub>PHL</sub> | Propagation Delay Time<br>High to Low Level Output | Clock to<br>Q or $\bar{Q}$  |                        | 30  |                        | 35  | ns    |
| t <sub>PLH</sub> | Propagation Delay Time<br>Low to High Level Output | Preset<br>to Q              |                        | 25  |                        | 35  | ns    |
| t <sub>PHL</sub> | Propagation Delay Time<br>High to Low Level Output | Preset<br>to $\bar{Q}$      |                        | 30  |                        | 35  | ns    |
| t <sub>PLH</sub> | Propagation Delay Time<br>Low to High Level Output | Clear<br>to $\bar{Q}$       |                        | 25  |                        | 35  | ns    |
| t <sub>PHL</sub> | Propagation Delay Time<br>High to Low Level Output | Clear<br>to Q               |                        | 30  |                        | 35  | ns    |



**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

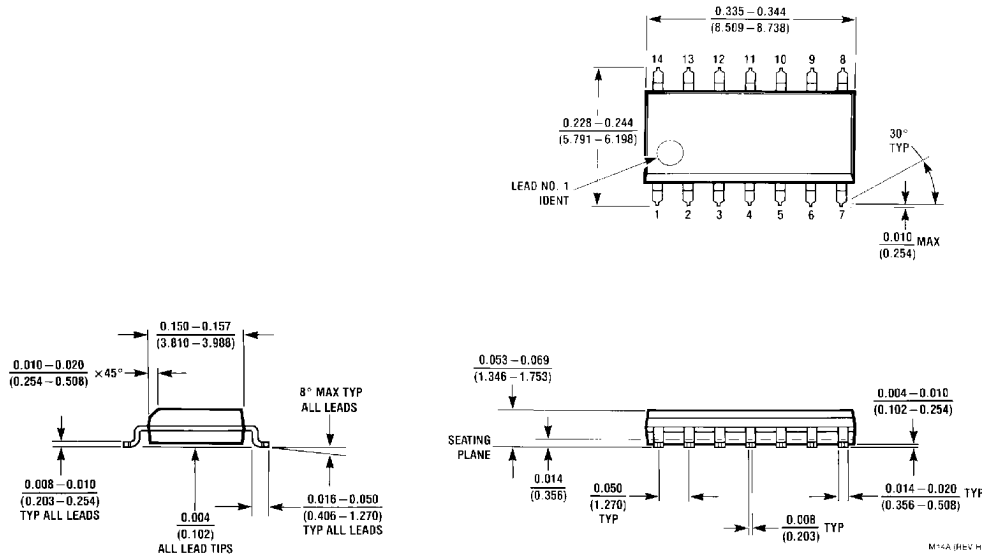


**14-Lead Small Outline Molded Package (M)**  
**Order Number DM74LS74AM**  
**Package Number M14A**

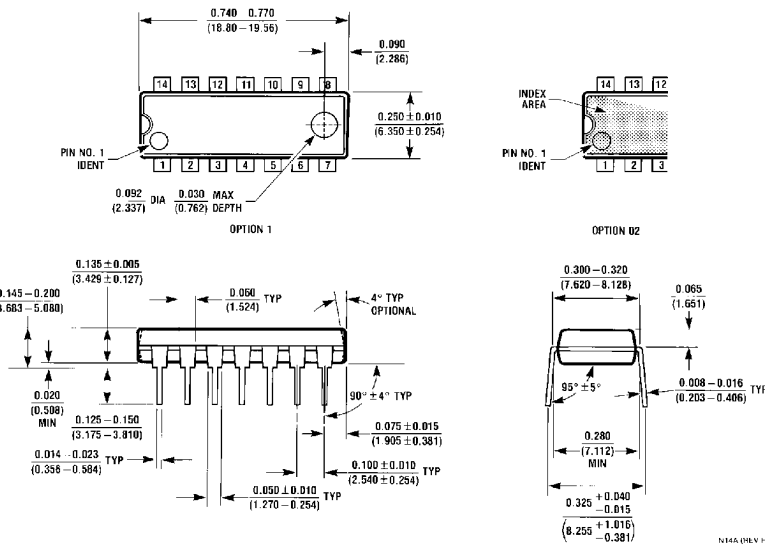

**14-Lead Molded Dual-In-Line Package (N)**  
**Order Number DM74LS74AN**  
**Package Number N14A**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

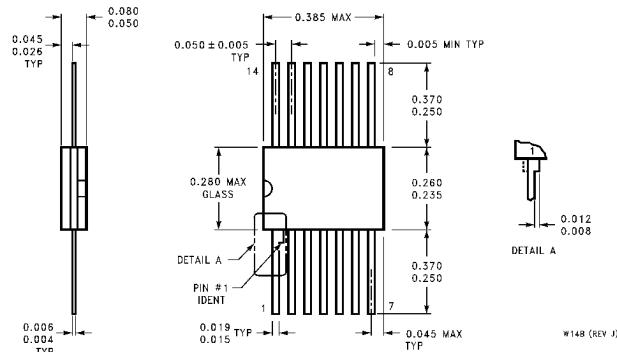

**14-Lead Ceramic Flat Package (W)**  
**Order Number 54LS74FMB or DM54LS74AW**  
**Package Number W14B**

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor Corporation  
 Americas  
 Customer Response Center  
 Tel: 1-888-522-5372

Fairchild Semiconductor Europe  
 Fax: +49 (0) 1 80-530 85 86  
 Email: europe.support@nsc.com  
 Deutsch Tel: +49 (0) 8 141-35-0  
 English Tel: +44 (0) 1 793-85-68-56  
 Italy Tel: +39 (0) 2 57 5631

Fairchild Semiconductor Hong Kong Ltd.  
 13th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: +852 2737-7200  
 Fax: +852 2314-0061

National Semiconductor Japan Ltd.  
 Tel: 81-3-5620-6175  
 Fax: 81-3-5620-6179

www.fairchildsemi.com

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.