

# MOSFET – Single, P-Channel, POWERTRENCH<sup>®</sup>, Logic Level

## FDN340P

### General Description

This P-Channel Logic Level MOSFET is produced using ON Semiconductor advanced POWERTRENCH process that has been especially tailored to minimize the on-state resistance and yet maintain low gate charge for superior switching performance.

These devices are well suited for portable electronics applications: load switching and power management, battery charging circuits, and dc-dc conversion.


### Features

- -2 A, 20 V
  - ◆  $R_{DS(ON)} = 70\text{ m}\Omega @ V_{GS} = -4.5\text{ V}$
  - ◆  $R_{DS(ON)} = 110\text{ m}\Omega @ V_{GS} = -2.5\text{ V}$
- Low Gate Charge (7.2 nC Typical)
- High Performance Trench Technology for Extremely Low  $R_{DS(ON)}$
- High Power Version of Industry Standard SOT-23 Package. Identical Pin-Out to SOT-23 with 30% Higher Power Handling Capability
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant




ON Semiconductor<sup>®</sup>


[www.onsemi.com](http://www.onsemi.com)



SOT-23  
CASE 527AG



### MARKING DIAGRAM



M = Date Code

### ORDERING INFORMATION

See detailed ordering and shipping information on page 3 of this data sheet.

# FDN340P

## ABSOLUTE MAXIMUM RATINGS

T<sub>A</sub> = 25°C unless otherwise noted

| Symbol                            | Parameter  | Ratings     | Unit |
|-----------------------------------|--|-------------|------|
| V <sub>DSS</sub>                  | Drain–Source Voltage   | –20         | V    |
| V <sub>GSS</sub>                  | Gate–Source Voltage  | ±8          | V    |
| I <sub>D</sub>                    | Drain Current<br>Continuous (Note 1a)<br>Pulsed                  | –2<br>–10   | A    |
| P <sub>D</sub>                    | Power Dissipation for Single Operation<br>(Note 1a)<br>(Note 1b) | 0.5<br>0.46 | W    |
| T <sub>J</sub> , T <sub>STG</sub> | Operating and Storage Junction Temperature Range                 | –55 to +150 | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

## THERMAL CHARACTERISTICS

| Symbol           | Parameter   | Ratings | Unit |
|------------------|---|---------|------|
| R <sub>θJA</sub> | Thermal Resistance, Junction–to–Ambient (Note 1a) | 250     | °C/W |
| R <sub>θJC</sub> | Thermal Resistance, Junction–to–Case (Note 1)     | 75      | °C/W |

## ELECTRICAL CHARACTERISTICS

T<sub>A</sub> = 25°C unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Unit |
|--------|-----------|-----------------|-----|-----|-----|------|
|--------|-----------|-----------------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                                      |   |   |     |     |      |       |
|--------------------------------------|---|---|-----|-----|------|-------|
| BV <sub>DSS</sub>                    | Drain–Source Breakdown Voltage            | V <sub>GS</sub> = 0 V, I <sub>D</sub> = –250 μA                       | –20 | –   | –    | V     |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | I <sub>D</sub> = –250 μA, Referenced to 25°C                          | –   | –12 | –    | mV/°C |
| I <sub>DSS</sub>                     | Zero Gate Voltage Drain Current           | V <sub>DS</sub> = –16 V, V <sub>GS</sub> = 0 V                        | –   | –   | –1   | μA    |
|                                      |   | V <sub>DS</sub> = –16 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 55°C | –   | –   | –10  |       |
| I <sub>GSSF</sub>                    | Gate–Body Leakage, Forward                | V <sub>GS</sub> = 8 V, V <sub>DS</sub> = 0 V                          | –   | –   | 100  | nA    |
| I <sub>GSSR</sub>                    | Gate–Body Leakage, Reverse                | V <sub>GS</sub> = –8 V, V <sub>DS</sub> = 0 V                         | –   | –   | –100 | nA    |

### ON CHARACTERISTICS (Note 2)

|  |  |   |      |      |      |       |
|--|--|---|------|------|------|-------|
| V <sub>GS(th)</sub>                    | Gate Threshold Voltage                         | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = –250 μA            | –0.4 | –0.8 | –1.5 | V     |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate Threshold Voltage Temperature Coefficient | I <sub>D</sub> = –250 μA, Referenced to 25°C                            | –    | 3    | –    | mV/°C |
| R <sub>DS(on)</sub>                    | Static Drain–Source On–Resistance              | V <sub>GS</sub> = –4.5 V, I <sub>D</sub> = –2 A                         | –    | 60   | 70   | mΩ    |
|  |  | V <sub>GS</sub> = –4.5 V, I <sub>D</sub> = –2 A, T <sub>J</sub> = 125°C | –    | 77   | 120  |       |
|  |  | V <sub>GS</sub> = –2.5 V, I <sub>D</sub> = –1.7 A                       | –    | 82   | 110  |       |
| I <sub>D(on)</sub>                     | On–State Drain Current                         | V <sub>GS</sub> = –4.5 V, V <sub>DS</sub> = –5 V                        | –5   | –    | –    | A     |
| g <sub>FS</sub>                        | Forward Transconductance                       | V <sub>DS</sub> = –4.5 V, I <sub>D</sub> = –2 A                         | –    | 9    | –    | S     |

### DYNAMIC CHARACTERISTICS

|     |                              |   |   |     |   |    |
|-----|------------------------------|---|---|-----|---|----|
| 600 | Input Capacitance            | V <sub>DS</sub> = –10 V, V <sub>GS</sub> = 0 V, f = 1.0 MHz | – | 779 | – | pF |
| 175 | Output Capacitance           |   | – | 121 | – | pF |
| 80  | Reverse Transfer Capacitance |   | – | 56  | – | pF |

# FDN340P

## ELECTRICAL CHARACTERISTICS (continued)

T<sub>A</sub> = 25°C unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Unit |
|--------|-----------|-----------------|-----|-----|-----|------|
|--------|-----------|-----------------|-----|-----|-----|------|

### SWITCHING CHARACTERISTICS (Note 2)

|                     |                     |   |   |     |    |    |
|---------------------|---------------------|---|---|-----|----|----|
| t <sub>d(on)</sub>  | Turn-On Delay Time  | V <sub>DD</sub> = -10 V, I <sub>D</sub> = -1 A,<br>V <sub>GS</sub> = -4.5 V, R <sub>GEN</sub> = 6 Ω | - | 10  | 20 | ns |
| t <sub>r</sub>      | Turn-On Rise Time   |   | - | 9   | 10 | ns |
| t <sub>d(off)</sub> | Turn-Off Delay Time |   | - | 27  | 43 | ns |
| t <sub>f</sub>      | Turn-Off Fall Time  |   | - | 11  | 20 | ns |
| Q <sub>g</sub>      | Total Gate Charge   | V <sub>DS</sub> = -10 V, I <sub>D</sub> = -3.5 A, V <sub>GS</sub> = -4.5 V                          | - | 7.2 | 10 | nC |
| Q <sub>gs</sub>     | Gate-Source Charge  |   | - | 1.7 | -  | nC |
| Q <sub>gd</sub>     | Gate-Drain Charge   |   | - | 1.5 | -  | nC |

### DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

|                 |   |  |   |       |      |      |   |
|-----------------|---|--|---|-------|------|------|---|
| I <sub>S</sub>  | Maximum Continuous Drain-Source Diode Forward Current | -  | - | -0.42 | A    |      |   |
| V <sub>SD</sub> | Drain-Source Diode Forward Voltage                    | V <sub>GS</sub> = 0 V, I <sub>S</sub> = -0.42 A (Note 2) |   | -     | -0.7 | -1.2 | V |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

#### NOTES:

- R<sub>θJA</sub> is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. R<sub>θJC</sub> is guaranteed by design while R<sub>θCA</sub> is determined by the user's board design.



a) 250°C/W when mounted on  
a 0.02 in<sup>2</sup> pad of 2 oz copper



b) 270°C/W when mounted on  
a 0.01 in<sup>2</sup> pad of 2 oz copper

Scale 1:1 on letter size paper

- Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%.

### PACKAGE MARKING AND ORDERING INFORMATION

| Device  | Device Marking | Package             | Reel Size | Tape Width | Shipping <sup>†</sup> |
|---------|----------------|---------------------|-----------|------------|-----------------------|
| FDN340P | 340            | SOT-23<br>(Pb-Free) | 7"        | 8 mm       | 3000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

TYPICAL CHARACTERISTICS

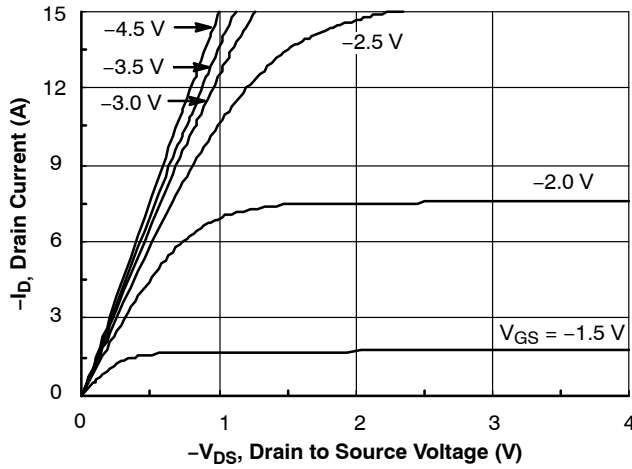


Figure 1. On-Region Characteristics

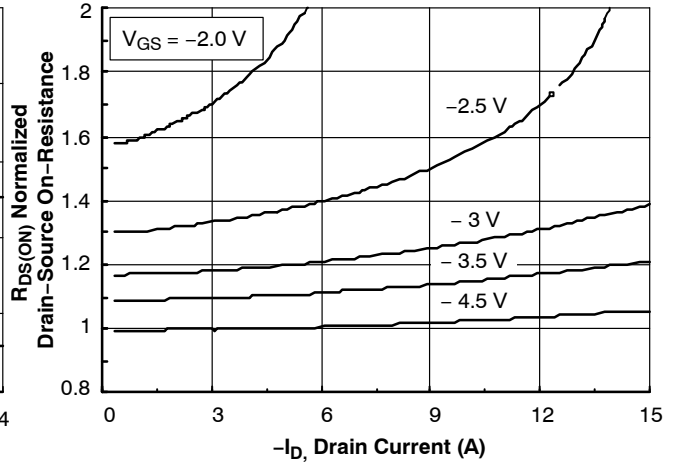


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage

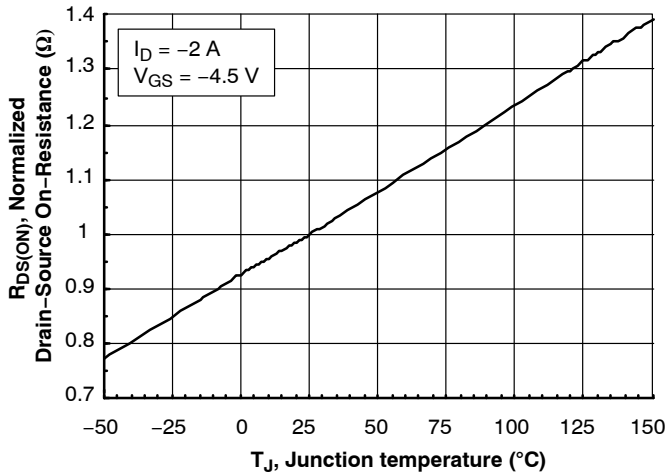


Figure 3. On-Resistance Variation with Temperature

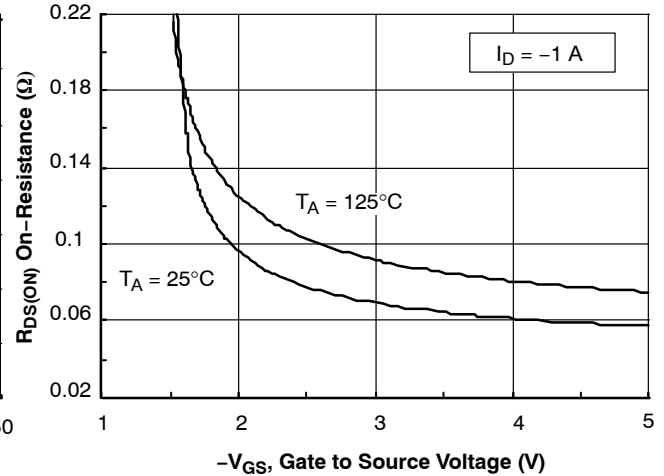


Figure 4. On-Resistance Variation with Gate-to-Source Voltage

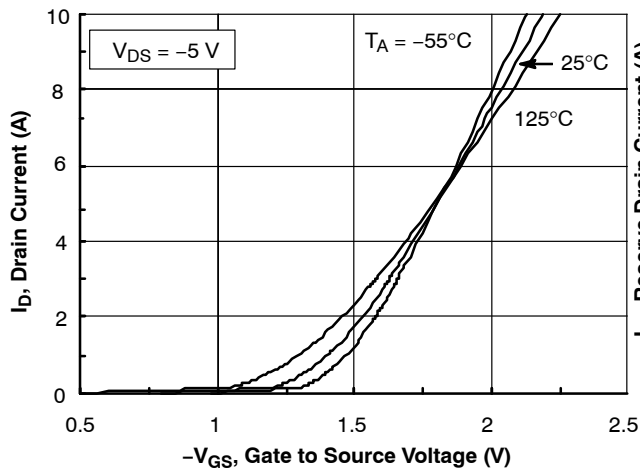


Figure 5. Transfer Characteristics

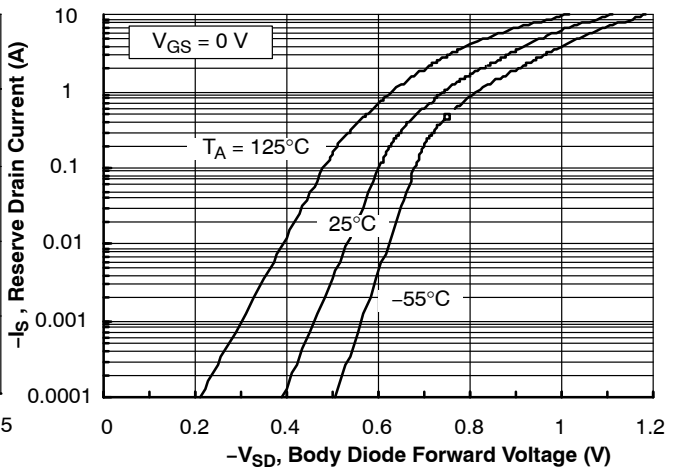


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature

TYPICAL CHARACTERISTICS (Continued)

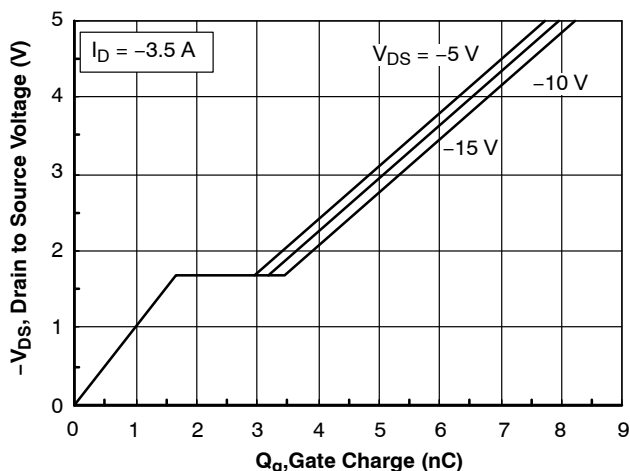


Figure 7. Gate Charge Characteristics

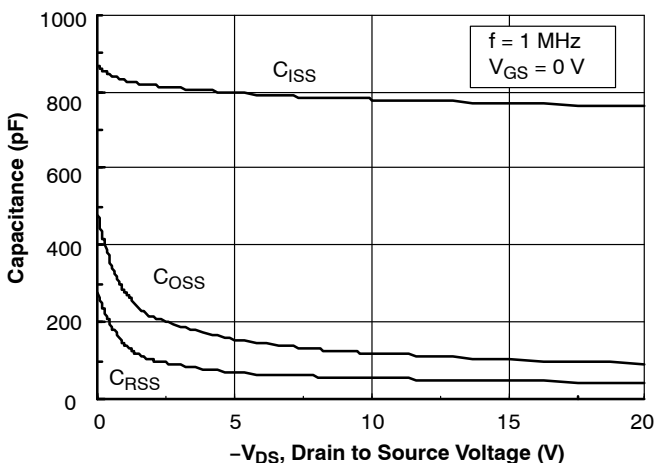


Figure 8. Capacitance Characteristics

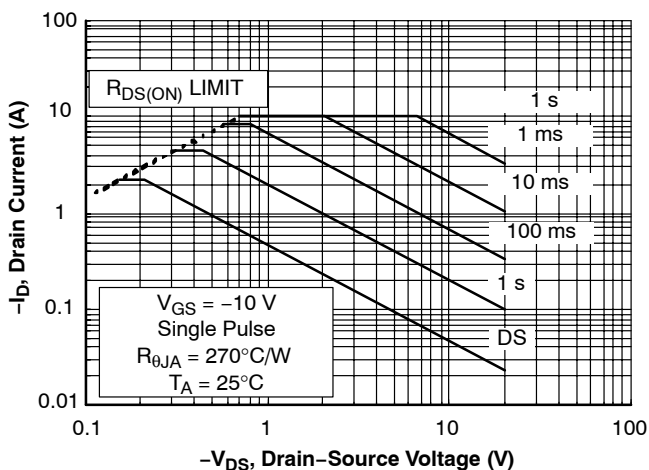


Figure 9. Maximum Safe Operating Area

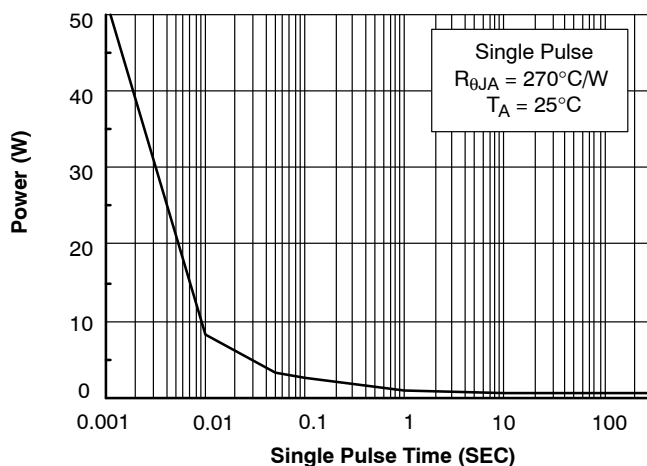


Figure 10. Single Pulse Maximum Power Dissipation

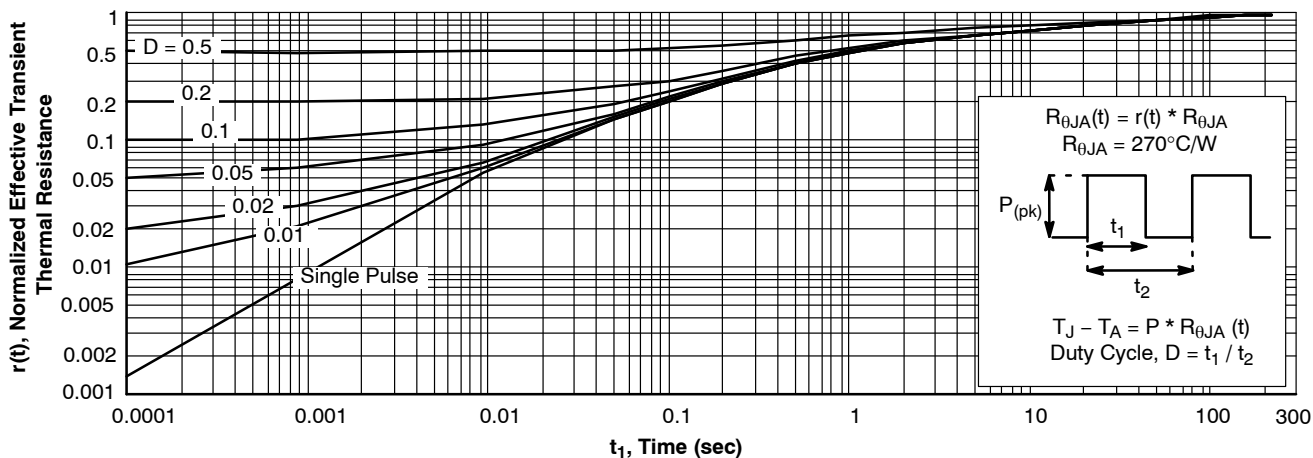


Figure 11. Transient Thermal Response Curve

Thermal characterization performed using the conditions described in Note 1b.  
 Transient thermal response will change depending on the circuit board design.

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS

ON Semiconductor®



### SOT-23/SUPERSOT™ -23, 3 LEAD, 1.4x2.9

CASE 527AG  
ISSUE A



DATE 09 DEC 2019



NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.


| DIM | MIN.     | NOM.  | MAX.  |
|-----|----------|-------|-------|
| A   | 0.85     | 0.95  | 1.12  |
| A1  | 0.00     | 0.05  | 0.10  |
| b   | 0.370    | 0.435 | 0.508 |
| c   | 0.085    | 0.150 | 0.180 |
| D   | 2.80     | 2.92  | 3.04  |
| E   | 2.31     | 2.51  | 2.71  |
| E1  | 1.20     | 1.40  | 1.52  |
| e   | 0.95 BSC |       |       |
| e1  | 1.90 BSC |       |       |
| L   | 0.33     | 0.38  | 0.43  |

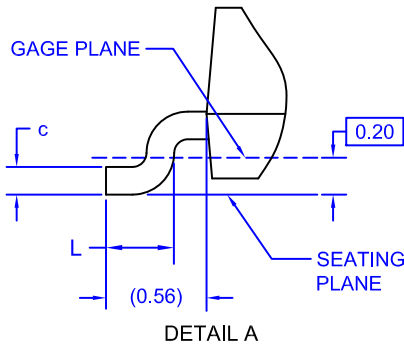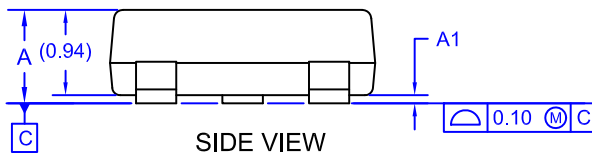

#### LAND PATTERN RECOMMENDATION\*

\*FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

#### GENERIC MARKING DIAGRAM\*



- XXX = Specific Device Code
- M = Month Code
- = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

|                         |  |   |
|-------------------------|--|---|
| <b>DOCUMENT NUMBER:</b> | <b>98AON34319E</b>                         | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-23/SUPERSOT-23, 3 LEAD, 1.4X2.9</b> | <b>PAGE 1 OF 1</b>  |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

North American Technical Support:  
Voice Mail: 1 800-282-9855 Toll Free USA/Canada  
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative