



FCIconnect.com

Copyright FCI.









1

2

## CONFIGURATION OF CUSTOMER DOCUMENTS

| P/N           | DOCUMENTS | DWG. NO.   | TITLE   |
|---------------|-----------|------------|---|
| HLW_R/S-2C7LF | SPEC      | SC-HLW05   | CONNECTOR USED FOR FPC/FFC WITH 1mm CONTACT SPACING |
|               | CONNECTOR | JSA96403   | CAT NO.TABLE FOR 1mm SPACING CONNECTOR              |
|               |           | JSA96405   | 1mm SPACING CONNECTOR FOR FPC/FFC                   |
|               |           | JSA96406   | 1mm SPACING CONNECTOR FOR FPC/FFC                   |
|               | CABLE     | JSA93382   | RECOMMENDED CABLE(FPC)                              |
|               |           | JSA93383   | RECOMMENDED CABLE(FFC)                              |
|               | MANUAL    | BJM-HLW101 | HANDLING PROCEDURES AND REMARKS                     |

| P/N           | DOCUMENTS | DWG. NO.   | TITLE   |
|---------------|-----------|------------|---|
| HLW_R/S-6C7LF | SPEC      | SC-HLW06   | CONNECTOR USED FOR C/C WITH 1mm CONTACT SPACING |
|               | CONNECTOR | JSA96404   | CAT NO.TABLE FOR 1mm SPACING CONNECTOR          |
|               |           | JSA96407   | 1mm SPACING CONNECTOR FOR C/C                   |
|               |           | JSA96408   | 1mm SPACING CONNECTOR FOR C/C                   |
|               | CABLE     | JSA93626   | RECOMMENDED CABLE(C/C)                          |
|               | MANUAL    | BJM-HLW102 | HANDLING PROCEDURES AND REMARKS                 |

|             |                |     |         |   |   |  |  |   |   |         |        |
|-------------|----------------|-----|---------|---|---|--|--|---|---|---------|--------|
| mat'l. code |                |     |         | surface 58 / tolerance ISO 1302 <input checked="" type="checkbox"/> ISO 406 <input type="checkbox"/> ISO 1101 |   | projection  |  | product family 58PF/QF  |   | CODE JP |        |
| ltr         | ecn no         | dr  | date    | tolerances unless otherwise specified   |   |  |  |        | title<br>1mm SPACING CONNECTOR<br>DOCUMENT LIST<br>(Cat. No. HLW_R/S-2/6C7LF) |         |        |
| A           | J05-0270       | H.T | 5/11/05 | angles  | linear  |  |  |   |   |         |        |
| B           | J05-0293       | H.T | 5/18/05 |   |   |  |  | scale  | dwg no sheet 1 of 1 size<br>JSA96418 A4                                       |         |        |
| C           | J05-0517       | H.T | 8/11/05 |   |   |  |  |   |   |         |        |
| D           | J06-0449       | H.T | 11/2/06 | dr  |  | 11/2/06  |  |        | type Product Customer Drawing   |         |        |
|             |                |     |         | enrg  |  | 11/2/06  |  |   |   |         |        |
|             |                |     |         | chr   |  | 11/2/06  |  |   |   |         |        |
|             |                |     |         | appd  |  | 11/2/06  |  |   |   |         |        |
| sheet index | revision sheet | D 1 |         |   |   |  |  |   |   |         | Rev. D |

form: A4

1

2

## CAT. NO. &amp; DIMENSIONS

| NO. OF CONTACTS (n) | CAT. NO.         |               | DIMENSIONS (NOTE1) |         |      |
|---------------------|------------------|---------------|--------------------|---------|------|
|                     | RIGHT ANGLE TYPE | STRAIGHT TYPE | A ± 0.3            | B ± 0.1 | C    |
| 4                   | HLW 4R-2C7LF     | HLW 4S-2C7LF  | 6.6                | 5.12    | 3.0  |
| 5                   | HLW 5R-2C7LF     | HLW 5S-2C7LF  | 7.6                | 6.12    | 4.0  |
| 6                   | HLW 6R-2C7LF     | HLW 6S-2C7LF  | 8.6                | 7.12    | 5.0  |
| 7                   | HLW 7R-2C7LF     | HLW 7S-2C7LF  | 9.6                | 8.12    | 6.0  |
| 8                   | HLW 8R-2C7LF     | HLW 8S-2C7LF  | 10.6               | 9.12    | 7.0  |
| 9                   | HLW 9R-2C7LF     | HLW 9S-2C7LF  | 11.6               | 10.12   | 8.0  |
| 10                  | HLW10R-2C7LF     | HLW10S-2C7LF  | 12.6               | 11.12   | 9.0  |
| 11                  | HLW11R-2C7LF     | HLW11S-2C7LF  | 13.6               | 12.12   | 10.0 |
| 12                  | HLW12R-2C7LF     | HLW12S-2C7LF  | 14.6               | 13.12   | 11.0 |
| 13                  | HLW13R-2C7LF     | HLW13S-2C7LF  | 15.6               | 14.12   | 12.0 |
| 14                  | HLW14R-2C7LF     | HLW14S-2C7LF  | 16.6               | 15.12   | 13.0 |
| 15                  | HLW15R-2C7LF     | HLW15S-2C7LF  | 17.6               | 16.12   | 14.0 |
| 16                  | HLW16R-2C7LF     | HLW16S-2C7LF  | 18.6               | 17.12   | 15.0 |
| 17                  | HLW17R-2C7LF     | HLW17S-2C7LF  | 19.6               | 18.12   | 16.0 |
| 18                  | HLW18R-2C7LF     | HLW18S-2C7LF  | 20.6               | 19.12   | 17.0 |
| 19                  | HLW19R-2C7LF     | HLW19S-2C7LF  | 21.6               | 20.12   | 18.0 |
| 20                  | HLW20R-2C7LF     | HLW20S-2C7LF  | 22.6               | 21.12   | 19.0 |
| 21                  | HLW21R-2C7LF     | HLW21S-2C7LF  | 23.6               | 22.12   | 20.0 |
| 22                  | HLW22R-2C7LF     | HLW22S-2C7LF  | 24.6               | 23.12   | 21.0 |
| 23                  | HLW23R-2C7LF     | HLW23S-2C7LF  | 25.6               | 24.12   | 22.0 |
| 24                  | HLW24R-2C7LF     | HLW24S-2C7LF  | 26.6               | 25.12   | 23.0 |
| 25                  | HLW25R-2C7LF     | HLW25S-2C7LF  | 27.6               | 26.12   | 24.0 |
| 26                  | HLW26R-2C7LF     | HLW26S-2C7LF  | 28.6               | 27.12   | 25.0 |
| 27                  | HLW27R-2C7LF     | HLW27S-2C7LF  | 29.6               | 28.12   | 26.0 |
| 28                  | HLW28R-2C7LF     | HLW28S-2C7LF  | 30.6               | 29.12   | 27.0 |
| 29                  | HLW29R-2C7LF     | HLW29S-2C7LF  | 31.6               | 30.12   | 28.0 |
| 30                  | HLW30R-2C7LF     | HLW30S-2C7LF  | 32.6               | 31.12   | 29.0 |
| 31                  | HLW31R-2C7LF     | HLW31S-2C7LF  | 33.6               | 32.12   | 30.0 |
| 32                  | HLW32R-2C7LF     | HLW32S-2C7LF  | 34.6               | 33.12   | 31.0 |

CAT. NO. HLW (n) R - 2C7 LF

SERIES \_\_\_\_\_

NO. OF CONTACTS \_\_\_\_\_

R : RIGHT ANGLE TYPE

S : STRAIGHT TYPE

VARIATION \_\_\_\_\_


LEAD FREE \_\_\_\_\_



## NOTES

1. SEE PART DRAWINGS FOR DIMENSIONS A~C.


|             |          |          |         |   |         |            |  |   |           |         |              |      |
|-------------|----------|----------|---------|---|---------|------------|--|---|-----------|---------|--------------|------|
| mat'l. code |          |          |         | surface 58 / tolerance ISO 406 / ISO 1101 |         | projection |  | product family 58PF/QF  |           | CODE JP |              |      |
| ltr         | ecn no   | dr       | date    | tolerances unless otherwise specified     |         |            |  | title CAT NO. TABLE FOR<br>1mm SPACING CONNECTOR<br>(Cat. No. : HLW__R/S-2C7LF) |           |         |              |      |
| A           | J05-0270 | H.T      | 5/10/05 | angles                                    | linear  | mm         |  |   |           |         |              |      |
| B           | J06-0449 | H.T      | 11/2/06 |   |         | scale X    |  |   |           |         |              |      |
|             |          |          |         | dr  | 11/2/06 |            |  |   | dwg no    |         | sheet 1 of 1 | size |
|             |          |          |         | enr                                       | 11/2/06 |            |  |   | JSA 96403 |         | A4           |      |
|             |          |          |         | chr                                       | 11/2/06 |            |  |   |           |         |              |      |
|             |          |          |         | appd                                      | 11/7/06 |            |  |   |           |         |              |      |
| sheet index |          | revision | B       |   |         |            |  | type Product Customer Drawing   |           | Rev. B  |              |      |

SC-HLW05 form: A4 JSA96405 96406 93382 93383

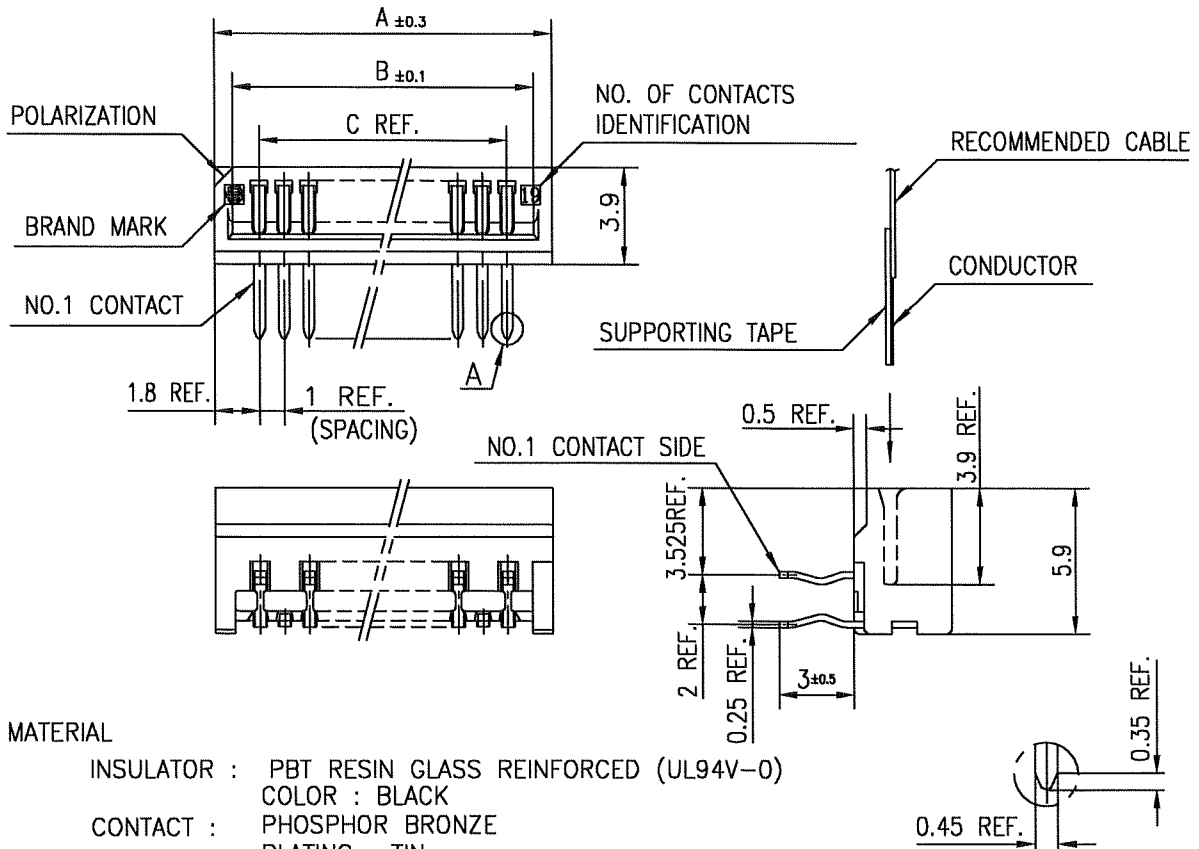

|             |          |     |           |                                       |  |                                  |  |   |  |   |  |  |  |            |  |
|-------------|----------|-----|-----------|---------------------------------------|--|----------------------------------|--|---|--|---|--|--|--|------------|--|
| mat'l. code |          |     |           | surface 58 ✓<br>ISO 1302              |  | tolerance<br>ISO 406<br>ISO 1101 |  | projection<br> |  | product family<br>58PF  |  |  |  | CODE<br>JP |  |
| ltr         | ecn no   | dr  | date      | tolerances unless otherwise specified |  |                                  |  |                |  | title<br>1mm SPACING<br>CONNECTOR FOR FPC/FFC<br>(Cat. No. :HLW__R-2C7LF) |  |  |  |            |  |
| A           | J05-0270 | H.T | 5/10/'05  | angles                                | linear   | ±0.2                             |  |   |  |   |  |  |  |            |  |
| B           | J05-0735 | H.T | 10/28/'05 |                                       |  |                                  |  |   |  |   |  |  |  |            |  |
| C           | J06-0449 | H.T | 11/2/'06  |                                       |  |                                  |  | scale X   |  | dwg no<br>sheet 1 of 1<br>JSA 96405<br>size<br>A4                         |  |  |  |            |  |
|             |          |     |           | dr                                    | <i>H. H</i> |                                  |  |   |  |   |  |  |  |            |  |

SC-HLW05 JSA96403  
 form: A4

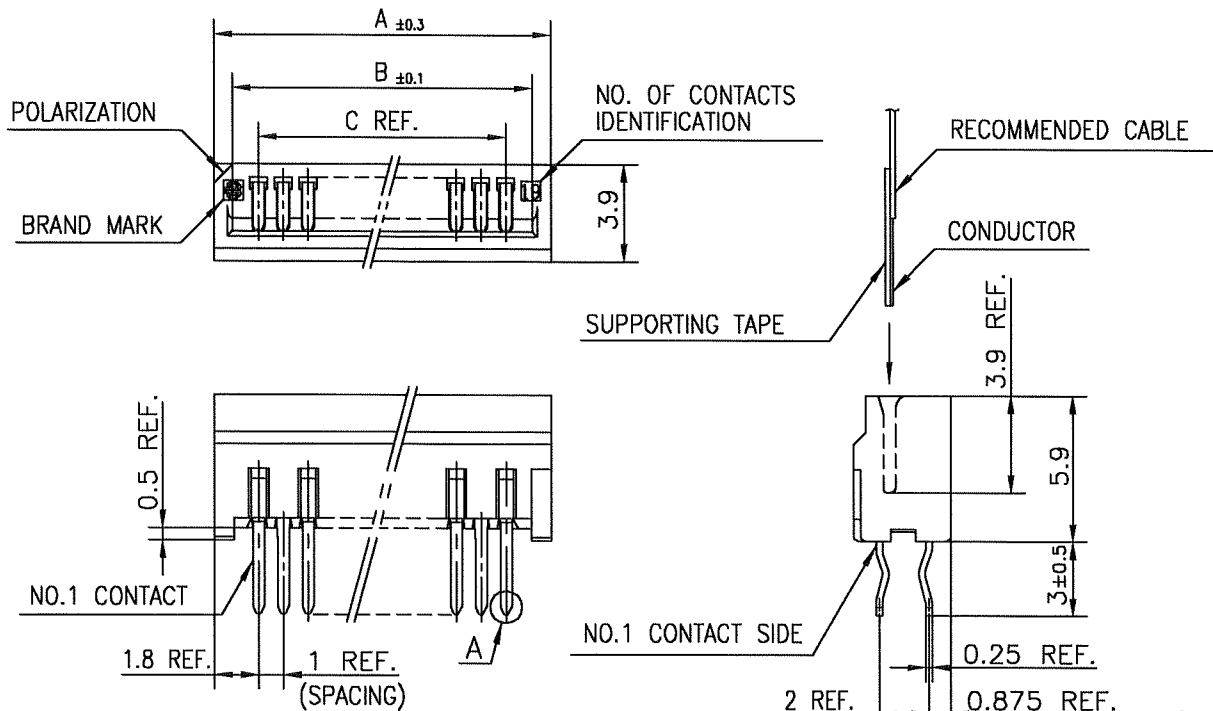

#### MATERIAL

INSULATOR : PBT RESIN GLASS REINFORCED (UL94V-0)  
 COLOR : BLACK  
 CONTACT : PHOSPHOR BRONZE  
 PLATING : TIN

NOTE 1. THIS PRODUCT IS STRAIGHT TYPE CONNECTOR.


2. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

3. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

#### RECOMMENDED PC BOARD




THICKNESS : 1.2~1.6

HOLE PATTERN (COMPONENT SIDE)

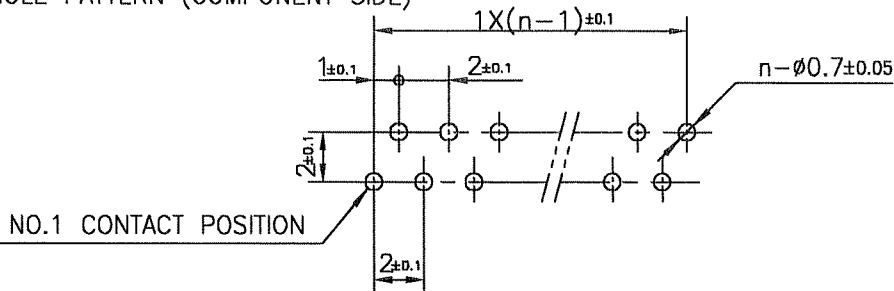

DETAIL A


n : NO. OF CONTACTS

|             |          |                |          |                                       |                    |                                  |  |   |  |   |  |   |  |            |  |  |  |
|-------------|----------|----------------|----------|---------------------------------------|--------------------|----------------------------------|--|---|--|---|--|---|--|------------|--|--|--|
| mat'l. code |          |                |          | surface 58 ✓<br>ISO 1302              |                    | tolerance<br>ISO 406<br>ISO 1101 |  | projection<br> |  | product family<br>58QF  |  |   |  | CODE<br>JP |  |  |  |
| ltr         | ecn no   | dr             | date     | tolerances unless otherwise specified |                    |                                  |  |   |  |  |  | title<br>1mm SPACING<br>CONNECTOR FOR FPC/FFC<br>(Cat. No. :HLW__S-2C7LF) |  |            |  |  |  |
| A           | J05-0270 | H.T            | 5/10/05  | angles                                | linear             | ±0.2                             |  | scale $\propto$   |  |   |  |   |  |            |  |  |  |
| B           | J05-0735 | H.T            | 10/28/05 |                                       |                    |                                  |  |   |  |   |  |   |  |            |  |  |  |
| C           | J06-0449 | H.T            | 11/2/06  |                                       |                    |                                  |  |   |  | dwg no<br>sheet 1 of 1<br>JSA 96406<br>size<br>A4                                   |  |   |  |            |  |  |  |
|             |          |                |          | dr                                    | <i>[Signature]</i> | 11/2/06                          |  |                |  |   |  |   |  |            |  |  |  |
|             |          |                |          | enr                                   | <i>[Signature]</i> | 11/2/06                          |  |   |  |   |  |   |  |            |  |  |  |
|             |          |                |          | chr                                   | <i>R. Shoups</i>   | 11/2/06                          |  |   |  |   |  |   |  |            |  |  |  |
|             |          |                |          | appd                                  | <i>S. Delaney</i>  | 11/7/06                          |  | type Product Customer Drawing   |  |   |  |   |  |            |  |  |  |
| sheet index |          | revision sheet | C 1      |                                       |                    |                                  |  |   |  |   |  |   |  |            |  |  |  |

SC-HLW05 JSA96403  
 form: A4

RECOMMENDED CABLE (FPC)

n : NO. OF CONDUCTORS

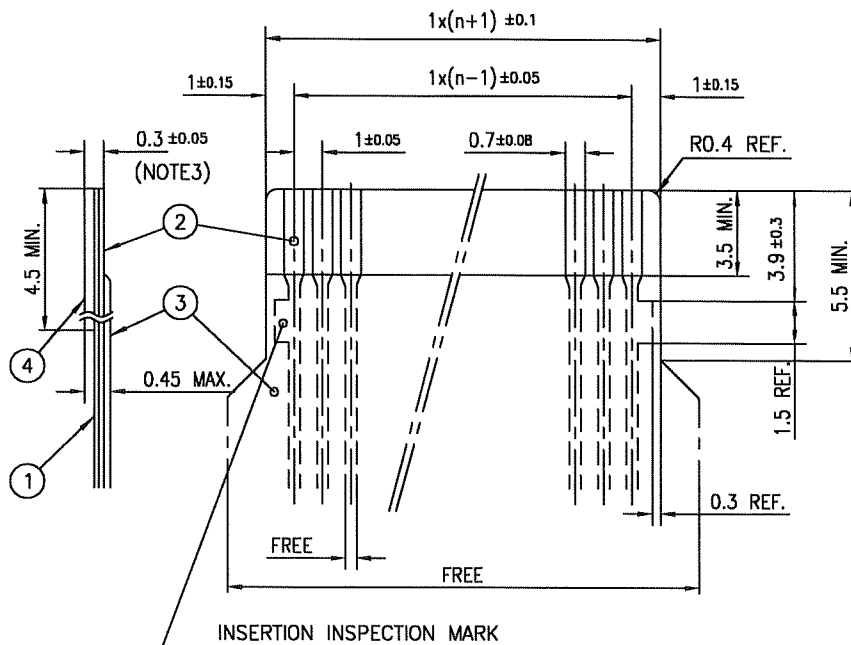

| PT. NO. | DESCRIPTION     | MATERIAL                                | THICKNESS (μm) |
|---------|-----------------|---|----------------|
| 1       | BASE FILM       | POLYIMIDE OR POLYESTER OR EQUIVALENT    | 25             |
| 2       | CONDUCTOR       | COPPER FOIL (PLATING : SOLDER 1μm MIN.) | 35             |
| 3       | OVERLAY         | POLYIMIDE OR POLYESTER OR EQUIVALENT    | —              |
| 4       | SUPPORTING TAPE | POLYESTER OR POLYIMIDE OR EQUIVALENT    | 188            |


NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

|             |          |                |         |   |  |            |  |                               |  |                   |  |
|-------------|----------|----------------|---------|---|--|------------|--|-------------------------------|--|-------------------|--|
| mat'l. code |          |                |         | surface 58 / tolerance ISO 406 ISO 1101 |  | projection |  | product family 58PF/QF        |  | CODE JP           |  |
| litr        | ecn no   | dr             | date    | tolerances unless otherwise specified   |  | mm         |  | title                         |  |                   |  |
| AA          | J05-0270 | H.T            | 5/11/05 | angles linear                           |  | mm         |  | RECOMMENDED CABLE (FPC)       |  |                   |  |
| AB          | J06-0449 | H.T            | 11/2/06 |   |  | scale X    |  | (Cat. No. HLW__R/S-__)        |  |                   |  |
|             |          |                |         | dr                                      |  | FCI        |  | dwg no                        |  | sheet 1 of 1 size |  |
|             |          |                |         | enr                                     |  |            |  | JSA 93382                     |  | A4                |  |
|             |          |                |         | chr                                     |  |            |  | type Product Customer Drawing |  |                   |  |
|             |          |                |         | appd                                    |  |            |  |                               |  |                   |  |
| sheet index |          | revision sheet |         | AB 1                                    |  |            |  |                               |  | Rev. AB           |  |

## RECOMMENDED CABLE (FFC)

n : NO. OF CONDUCTORS

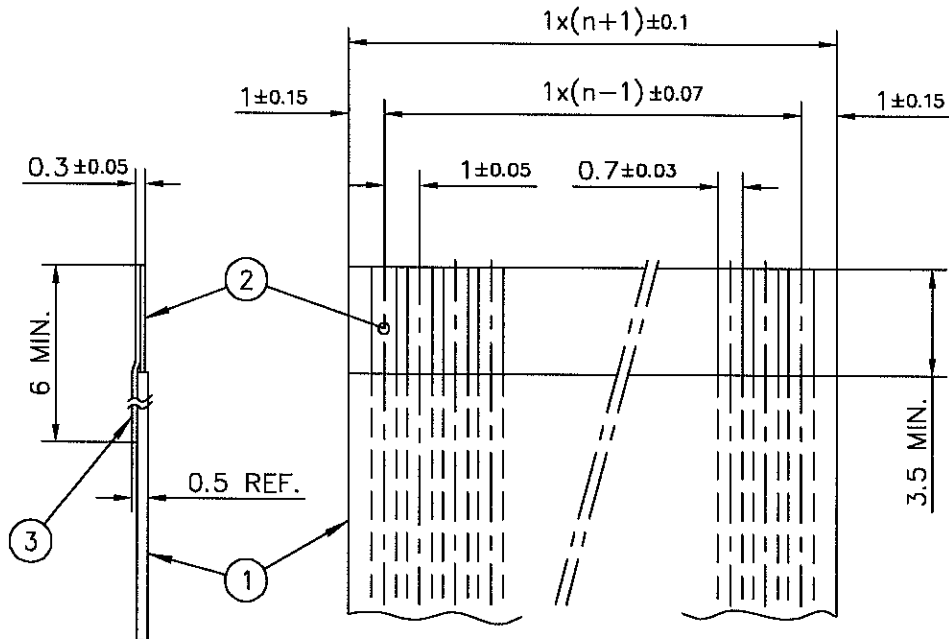

| PT. NO. | DESCRIPTION     | MATERIAL                                | NOTE                                |
|---------|-----------------|---|-------------------------------------|
| 1       | INSULATOR       | FLAME RESISTING POLYESTER OR EQUIVALENT |                                     |
| 2       | CONDUCTOR       | COPPER FOIL                             | PLATING : TIN OR SOLDER<br>1μm MIN. |
| 3       | SUPPORTING TAPE | FLAME RESISTING POLYESTER OR EQUIVALENT |                                     |

## NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.

|             |          |     |         |  |  |            |  |                         |  |                          |  |
|-------------|----------|-----|---------|--|--|------------|--|-------------------------|--|--------------------------|--|
| mat'l. code |          |     |         | surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101 |  | projection |  | product family 58PF/QF  |  | CODE JP                  |  |
| litr        | ecn no   | dr  | date    | tolerances unless otherwise specified              |  | mm         |  | title                   |  |                          |  |
| AA          | J05-0270 | H.T | 5/11/05 | angles linear                                      |  | mm         |  | RECOMMENDED CABLE (FFC) |  |                          |  |
| AB          | J06-0449 | H.T | 11/2/06 |  |  | scale X    |  | (Cat. No. HLW_R/S-___)  |  |                          |  |
|             |          |     |         | dr   |  | 11/2/06    |  | dwg no                  |  | sheet 1 of 1 size        |  |
|             |          |     |         | enrg   |  | 11/2/06    |  | JSA 93383               |  | A4                       |  |
|             |          |     |         | chr  |  | 11/2/06    |  | type                    |  | Product Customer Drawing |  |
|             |          |     |         | appd   |  | 11/2/06    |  |                         |  |                          |  |
| sheet index | revision | AB  | 1       |  |  |            |  |                         |  | Rev. AB                  |  |

form: A4

1

2



## CAT. NO. &amp; DIMENSIONS

| NO. OF CONTACTS (n) | CAT. NO.         |               | DIMENSIONS (NOTE1) |         |      |
|---------------------|------------------|---------------|--------------------|---------|------|
|                     | RIGHT ANGLE TYPE | STRAIGHT TYPE | A ± 0.3            | B ± 0.1 | C    |
| 4                   | HLW 4R-6C7LF     | HLW 4S-6C7LF  | 6.6                | 5.12    | 3.0  |
| 5                   | HLW 5R-6C7LF     | HLW 5S-6C7LF  | 7.6                | 6.12    | 4.0  |
| 6                   | HLW 6R-6C7LF     | HLW 6S-6C7LF  | 8.6                | 7.12    | 5.0  |
| 7                   | HLW 7R-6C7LF     | HLW 7S-6C7LF  | 9.6                | 8.12    | 6.0  |
| 8                   | HLW 8R-6C7LF     | HLW 8S-6C7LF  | 10.6               | 9.12    | 7.0  |
| 9                   | HLW 9R-6C7LF     | HLW 9S-6C7LF  | 11.6               | 10.12   | 8.0  |
| 10                  | HLW10R-6C7LF     | HLW10S-6C7LF  | 12.6               | 11.12   | 9.0  |
| 11                  | HLW11R-6C7LF     | HLW11S-6C7LF  | 13.6               | 12.12   | 10.0 |
| 12                  | HLW12R-6C7LF     | HLW12S-6C7LF  | 14.6               | 13.12   | 11.0 |
| 13                  | HLW13R-6C7LF     | HLW13S-6C7LF  | 15.6               | 14.12   | 12.0 |
| 14                  | HLW14R-6C7LF     | HLW14S-6C7LF  | 16.6               | 15.12   | 13.0 |
| 15                  | HLW15R-6C7LF     | HLW15S-6C7LF  | 17.6               | 16.12   | 14.0 |
| 16                  | HLW16R-6C7LF     | HLW16S-6C7LF  | 18.6               | 17.12   | 15.0 |
| 17                  | HLW17R-6C7LF     | HLW17S-6C7LF  | 19.6               | 18.12   | 16.0 |
| 18                  | HLW18R-6C7LF     | HLW18S-6C7LF  | 20.6               | 19.12   | 17.0 |
| 19                  | HLW19R-6C7LF     | HLW19S-6C7LF  | 21.6               | 20.12   | 18.0 |
| 20                  | HLW20R-6C7LF     | HLW20S-6C7LF  | 22.6               | 21.12   | 19.0 |
| 21                  | HLW21R-6C7LF     | HLW21S-6C7LF  | 23.6               | 22.12   | 20.0 |
| 22                  | HLW22R-6C7LF     | HLW22S-6C7LF  | 24.6               | 23.12   | 21.0 |
| 23                  | HLW23R-6C7LF     | HLW23S-6C7LF  | 25.6               | 24.12   | 22.0 |
| 24                  | HLW24R-6C7LF     | HLW24S-6C7LF  | 26.6               | 25.12   | 23.0 |
| 25                  | HLW25R-6C7LF     | HLW25S-6C7LF  | 27.6               | 26.12   | 24.0 |
| 26                  | HLW26R-6C7LF     | HLW26S-6C7LF  | 28.6               | 27.12   | 25.0 |
| 27                  | HLW27R-6C7LF     | HLW27S-6C7LF  | 29.6               | 28.12   | 26.0 |
| 28                  | HLW28R-6C7LF     | HLW28S-6C7LF  | 30.6               | 29.12   | 27.0 |
| 29                  | HLW29R-6C7LF     | HLW29S-6C7LF  | 31.6               | 30.12   | 28.0 |
| 30                  | HLW30R-6C7LF     | HLW30S-6C7LF  | 32.6               | 31.12   | 29.0 |
| 31                  | HLW31R-6C7LF     | HLW31S-6C7LF  | 33.6               | 32.12   | 30.0 |
| 32                  | HLW32R-6C7LF     | HLW32S-6C7LF  | 34.6               | 33.12   | 31.0 |

CAT. NO. HLW (n) R - 6C7 LF

SERIES

NO. OF CONTACTS

R : RIGHT ANGLE TYPE

S : STRAIGHT TYPE

VARIATION






LEAD FREE

NOTES

1. SEE PART DRAWINGS FOR DIMENSIONS A~C.

|             |          |                |         |                                       |         |                                  |  |                |  |  |                               |         |  |
|-------------|----------|----------------|---------|---------------------------------------|---------|----------------------------------|--|----------------|--|--|-------------------------------|---------|--|
| mat'l. code |          |                |         | surface 58<br>ISO 1302                |         | tolerance<br>ISO 406<br>ISO 1101 |  | projection<br> |  | product family 58PF/QF   |                               | CODE JP |  |
| ltr         | ecn no   | dr             | date    | tolerances unless otherwise specified |         |                                  |  |                |  | title<br>CAT NO. TABLE FOR<br>1mm SPACING CONNECTOR<br>(Cat. No. : HLW__R/S-6C7LF) |                               |         |  |
| A           | J05-0270 | H.T            | 5/10/05 | angles                                |         | linear                           |  | mm             |  |  |                               |         |  |
| B           | J06-0449 | H.T            | 11/2/06 |                                       |         |                                  |  | scale X        |  |  |                               |         |  |
|             |          |                |         | dr                                    | 11/2/06 |                                  |  |                |  |  | dwg no sheet 1 of 1 size      |         |  |
|             |          |                |         | engr                                  | 11/2/06 |                                  |  |                |  |  | JSA 96404 A4                  |         |  |
|             |          |                |         | chr                                   | 11/2/06 |                                  |  |                |  |  |                               |         |  |
|             |          |                |         | appd                                  | 11/2/06 |                                  |  |                |  |  |                               |         |  |
| sheet index |          | revision sheet |         | B                                     |         |                                  |  |                |  |  | type Product Customer Drawing |         |  |
|             |          |                |         | 1                                     |         |                                  |  |                |  |  | Rev. B                        |         |  |

SC-HLW06 JSA96407 96408 93626  
form: A4

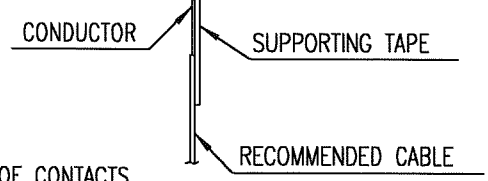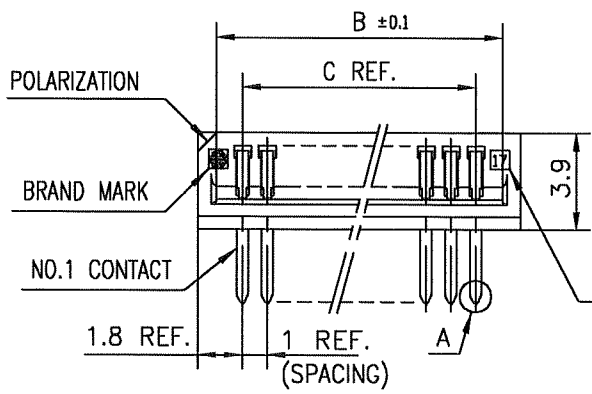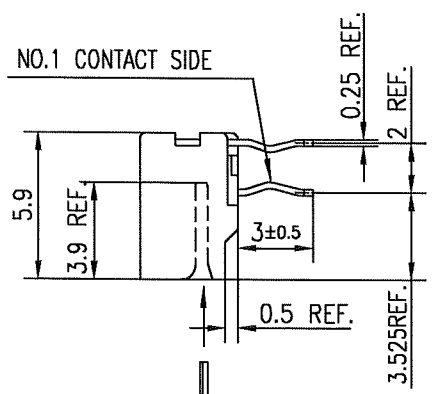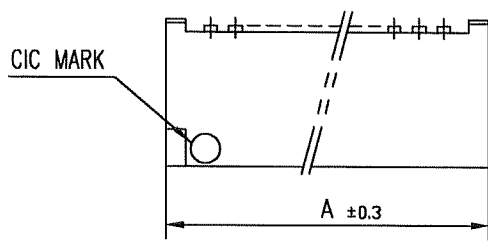

MATERIAL

INSULATOR : PBT RESIN GLASS REINFORCED (UL94V-0)  
 COLOR : BLACK  
 CONTACT : PHOSPHOR BRONZE  
 PLATING : TIN


NOTE

- 1.THIS PRODUCT IS RIGHT ANGLE TYPE CONNECTOR.
- 2.THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 3.THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

RECOMMENDED PC BOARD

THICKNESS : 1.2~1.6  
 HOLE PATTERN (COMPONENT SIDE)


n : NO. OF CONTACTS

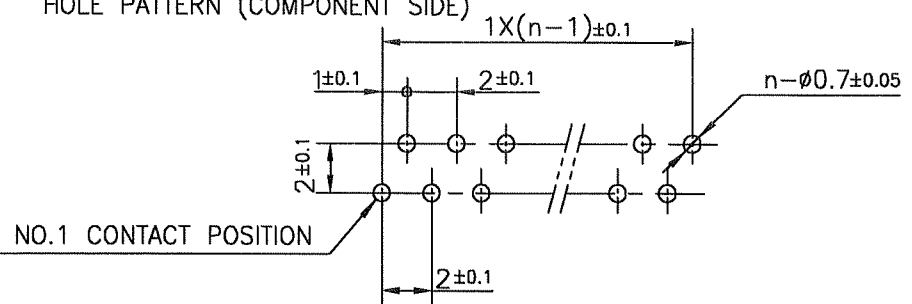

|             |          |     |          |                                       |                   |            |   |                   |
|-------------|----------|-----|----------|---------------------------------------|-------------------|------------|---|-------------------|
| mat'l. code |          |     |          | surface 58                            | tolerance ISO 406 | projection | product family 58PF   | CODE JP           |
| ltr         | ecn no   | dr  | date     | ISO 1302                              | ISO 1101          | mm         | title<br>1mm SPACING<br>CONNECTOR FOR CIC<br>(Cat. No. :HLW__R-6C7LF) |                   |
| A           | J05-0270 | H.T | 5/10/05  | tolerances unless otherwise specified | ±0.2              |            |   |                   |
| B           | J05-0735 | H.T | 10/28/05 | angles                                | linear            |            |   |                   |
| C           | J06-0449 | H.T | 11/2/06  |                                       |                   | scale      | dwg no  | sheet 1 of 1 size |
|             |          |     |          | dr                                    |                   | FCI        | JSA 96407   | A4                |
|             |          |     |          | enr                                   |                   |            | type Product Customer Drawing   |                   |
|             |          |     |          | chr                                   |                   |            |   |                   |
|             |          |     |          | appd                                  |                   |            |   |                   |
| sheet index | revision | C   |          |                                       |                   |            |   | Rev. C            |
|             | sheet    | 1   |          |                                       |                   |            |   |                   |

SC-HLW06  
 form: A4



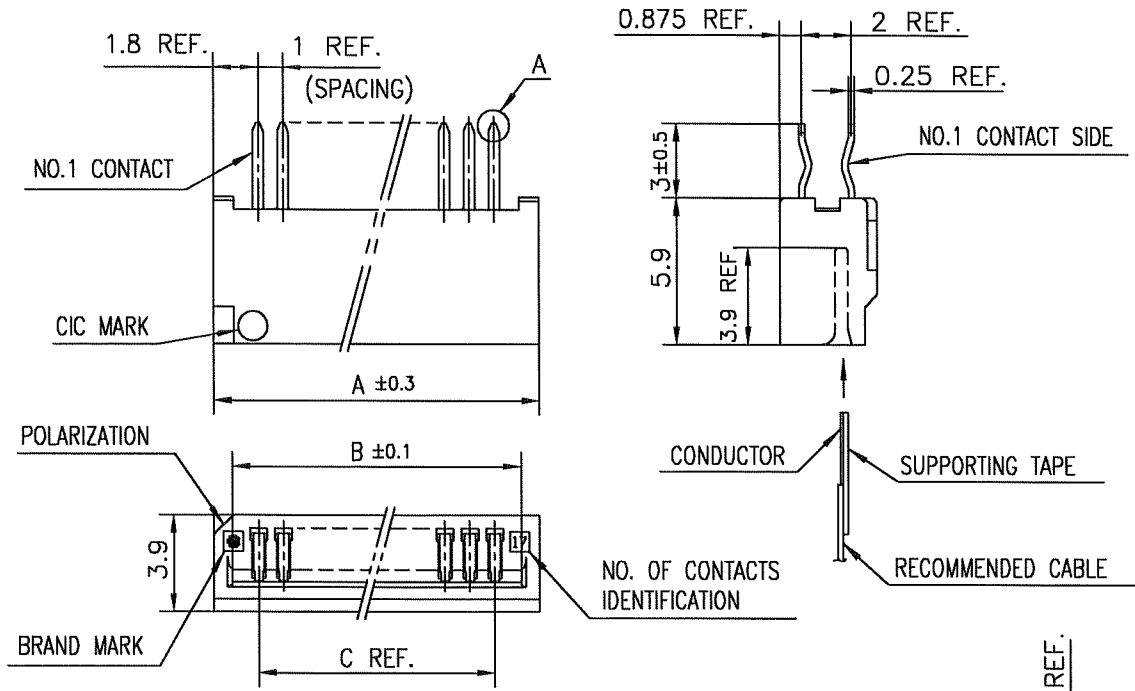

MATERIAL

INSULATOR : PBT RESIN GLASS REINFORCED (UL94V-0)

COLOR : BLACK

CONTACT : PHOSPHOR BRONZE

PLATING : TIN

NOTE

1. THIS PRODUCT IS STRAIGHT TYPE CONNECTOR.

2. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.


3. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

n : NO. OF CONTACTS

RECOMMENDED PC BOARD

THICKNESS : 1.2~1.6

HOLE PATTERN (COMPONENT SIDE)

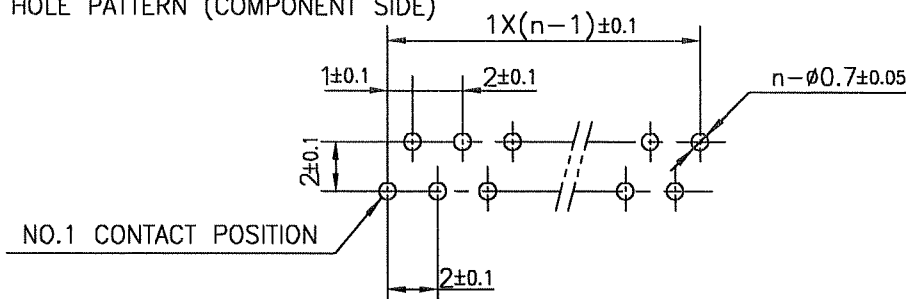


|             |          |     |          |                                       |           |            |  |              |
|-------------|----------|-----|----------|---------------------------------------|-----------|------------|--|--------------|
| mat'l. code |          |     |          | surface 58                            | tolerance | projection | product family   | CODE         |
|             |          |     |          | ISO 1302                              | ISO 406   |            | 58QF   | JP           |
| ltr         | ecn no   | dr  | date     | tolerances unless otherwise specified |           | mm         | title  |              |
| A           | J05-0270 | H.T | 5/10/05  | angles                                | linear    |            |  |              |
| B           | J05-0735 | H.T | 10/28/05 |                                       |           |            | 1mm SPACING<br>CONNECTOR FOR CIC<br>(Cat. No. :HLW__S-6C7LF) |              |
| C           | J06-0449 | H.T | 11/2/01  |                                       |           | scale      |  |              |
|             |          |     |          | dr                                    | 11/2/06   | FCI        | dwg no   | sheet 1 of 1 |
|             |          |     |          | enr                                   | 11/2/06   |            | JSA 96408  | size         |
|             |          |     |          | chr                                   | 11/2/06   |            |  | A4           |
|             |          |     |          | appd                                  | 11/2/06   |            | type Product Customer Drawing                                |              |
| sheet       | revision | C   |          |                                       |           |            |  | Rev.         |
| index       | sheet    | 1   |          |                                       |           |            |  | c            |

SC-HLW 06 JSA96404  
form: A4

## RECOMMENDED CABLE (CIC)

n : NO. OF CONDUCTORS

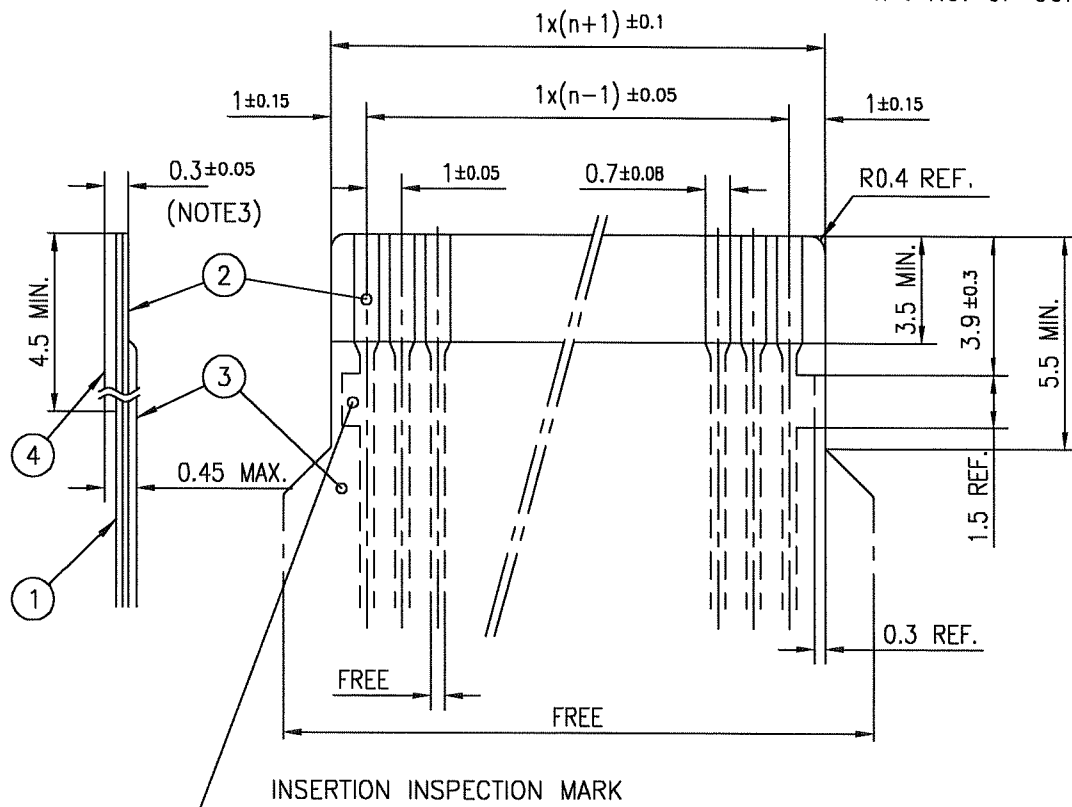

| PT. NO. | DESCRIPTION     | MATERIAL                             | THICKNESS ( $\mu\text{m}$ ) |     |
|---------|-----------------|--------------------------------------|-----------------------------|-----|
| 1       | BASE FILM       | POLYESTER OR EQUIVALENT              | 75                          | 25  |
| 2       | CONDUCTOR       | CARBON PASTE OVER SILVER PASTE       | 10 MIN.                     |     |
| 3       | OVERLAY         | POLYIMIDE OR POLYESTER OR EQUIVALENT | —                           |     |
| 4       | SUPPORTING TAPE | POLYESTER OR POLYIMIDE OR EQUIVALENT | 188                         | 250 |

## NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

|             |          |                |         |                                       |  |                                  |  |                  |  |  |  |                          |  |
|-------------|----------|----------------|---------|---------------------------------------|--|----------------------------------|--|------------------|--|--|--|--------------------------|--|
| mat'l. code |          |                |         | surface<br>ISO 1302 ✓                 |  | tolerance<br>ISO 406<br>ISO 1101 |  | projection<br>mm |  | product family<br>58PF/QF                                  |  | CODE<br>JP               |  |
| ltr         | ecn no   | dr             | date    | tolerances unless otherwise specified |  |                                  |  | mm               |  | title<br>RECOMMENDED CABLE (CIC)<br>(Cat. No. HLW__R/S-__) |  |                          |  |
| AA          | J05-0270 | H.T            | 5/11/05 | angles                                |  | linear                           |  | scale            |  | dwg no   |  | sheet 1 of 1             |  |
| AB          | J06-0449 | H.T            | 11/2/06 |                                       |  |                                  |  | X                |  | JSA 93626  |  | size<br>A4               |  |
|             |          |                |         | dr                                    |  | 11/2/06                          |  | FCI              |  | type   |  | Product Customer Drawing |  |
|             |          |                |         | engr                                  |  | 11/2/06                          |  |                  |  |  |  |                          |  |
|             |          |                |         | chr                                   |  | 11/2/06                          |  |                  |  |  |  |                          |  |
|             |          |                |         | appd                                  |  | 11/7/06                          |  |                  |  |  |  |                          |  |
| sheet index |          | revision sheet |         | AB                                    |  | 1                                |  |                  |  |  |  | Rev.<br>AB               |  |

form: A4

1

2

Find price and stock options from leading distributors for HLW31S-2C7LF on Findchips.com:

<https://findchips.com/search/HLW31S-2C7LF>

Find CAD models and details for this part:

<https://findchips.com/detail/hlw31s-2c7lf/Amphenol-FCi>