

0302 0402
 0502 0504
 0603 0805

RCX

1005 1206
 1505 2010
 2512



Features

Thick film technology

Full Wraparound and
 Single Wraparound with
 Groundplane

Ideal for epoxy
 attachment. Solder
 coating also available

Resistance values from
 1 ohm to 1000 Gigohm

Tolerances to 1 %

TCR to 100 ppm/°C

ims International
 Manufacturing
 Services, Inc.


50 Schoolhouse Lane
 Portsmouth, RI 02871
 Tel (401) 683-9700
 Fax (401) 683-5571
 e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>

Thick Film Wraparound Surface Mount Chip Resistors for Epoxy and Solder Mount


The **ims** RCX, HCX series of thick film wraparound surface mount chip resistors is ideal for most applications requiring epoxy or solder die attaching methods. Thick film technology provides a stable resistor at a very affordable price. The "X" designation in each series is a variable that allows for specifying the termination metalization. Please see the ordering information on the back for instructions. The wraparound terminations use gold, platinum gold, platinum silver, or platinum silver with solder coating. These chip resistors have the following features:

- High stability thick film resistor element
- 96% Al₂O₃ substrate material
- Platinum silver(PtAg), platinum gold(PtAu), solder coated platinum silver, solder coated platinum gold, or gold(Au) terminations
- Tolerances to ± 1%
- Passivated resistor element available where not standard
- Available in bulk, tape and reel, and waffle pack


Termination styles



SG - Single wrap
 with groundplane



Full wraparound

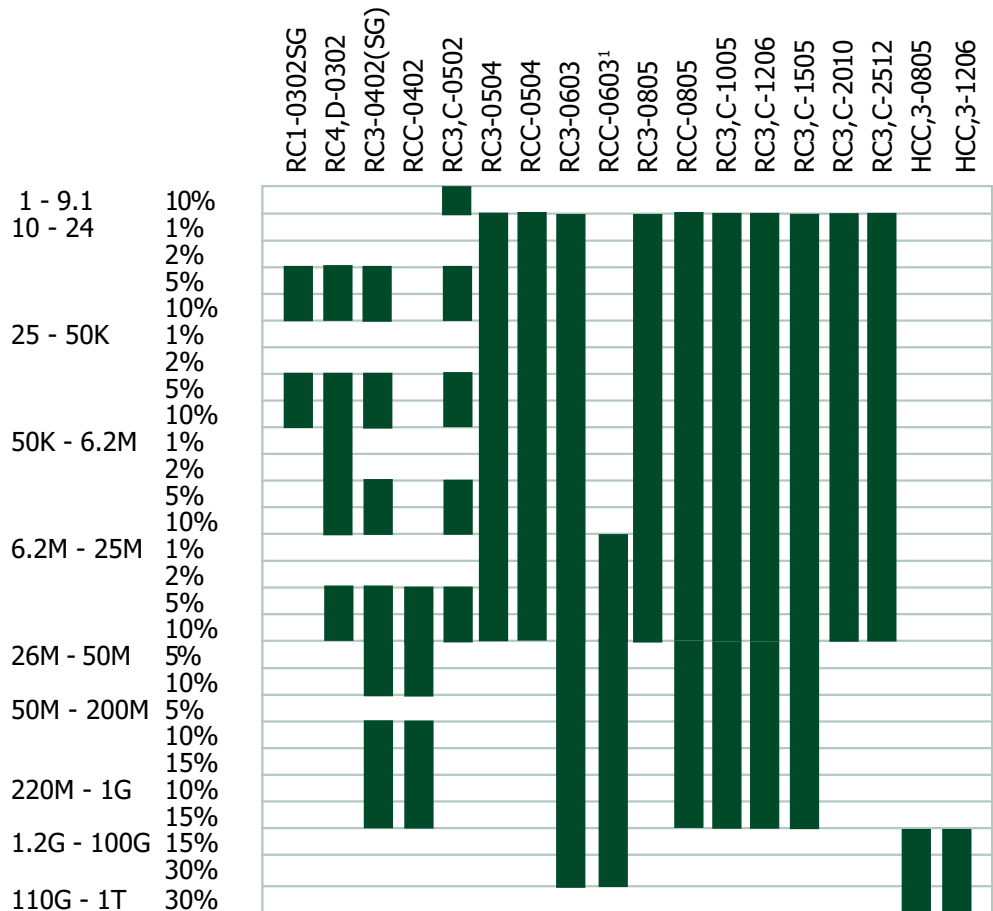

Consult factory for additional values.

¹Lowest resistor value is 11MΩ.

Dimensions

Part Number	Length	Width	Height	Terminal
RC1-0302SG*	0.030 \pm $\begin{matrix} +.004 \\ -.002 \end{matrix}$	0.020 \pm .003	0.020 max.	0.009 \pm .003
RC4,D-0302	0.030 \pm .005	0.020 \pm .003	0.020 max.	0.008 \pm .005
RC3,C-0402(SG)	0.040 \pm .005	0.020 \pm .005	0.020 max.	0.008 \pm .004
RCX-0502	0.050 \pm .005	0.020 \pm .005	0.020 max.	0.014 \pm .005
RCX-0504	0.050 \pm .005	0.040 \pm .005	0.020 max.	0.015 \pm .006
RCX-0603	0.060 \pm .005	0.030 \pm .005	0.020 max.	0.014 \pm .006
RCX,HCX-0805	0.080 \pm .005	0.050 \pm .005	0.020 max.	0.018 \pm .008
RCX-1005	0.100 \pm $\begin{matrix} +.010 \\ -.005 \end{matrix}$	0.050 \pm .005	0.020 max.	0.015 \pm .005
RCX,HCX-1206	0.126 \pm .008	0.063 \pm .006	0.020 max.	0.020 \pm .010
RCX-1505	0.150 \pm $\begin{matrix} +.010 \\ -.005 \end{matrix}$	0.050 \pm .005	0.020 max.	0.016 \pm .006
RCX-2512	0.248 \pm .008	0.126 \pm .010	0.028 max.	0.026 \pm .010

*SG terminations available on all sizes as special order. Contact factory for details.

Specifications

Operating temperature	-55°C to +150°C
Maximum Working Voltage	
RCX-0302 to RCX-0603	50 VDC
RCX-0805	150 VDC
Rated power (70°C)	
RCX-0302	63 mW
RC3,C-0402	80 mW
RCX-0504	125 mW
RCX-0502, 0603	100 mW
RCX-0805	175 mW
RCX-1206, 1005, 1505	250 mW
RCX-2512	1 W
Resistance tolerances*	
RCX-0302, 0402	5%, 10%
RCX-0502 to RCX-2512	1%, 2%, 5%, 10%, 15%, 30%


* Not all values available in all tolerances.

Ordering Information

Example: 100Ω, 5%, 0504, PtAg terminations, 125mW resistor


RC	RC3 - 0504 -1000 J				Tolerance
1 Au					F - 1% G - 2%
3 PtAg					J - 5% K - 10%
4 Pt Au (0302SG only)					L - 15% N - 30%
C PtAg with 62/36/2 solder coating					M - 20%
D PtAu with 62/36/2 solder coating (0302SG only)					
Form factor					Resistance value
0302(SG) 0402(SG) 0502 0504					The first three digits are significant values. The fourth is the number of zeroes following. The R indicates a decimal point when resistance value is less than 100Ω.
0603 0805 1005 1206					
1505 2010 2512					

RCX ver.5 03/04 Specifications subject to change without

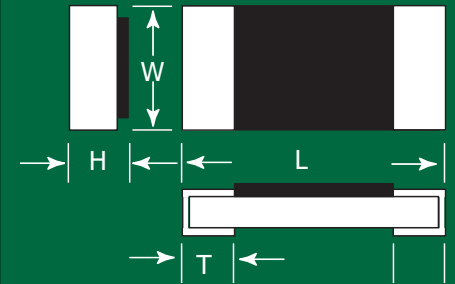


TCR (typical)


RCX Standard Values

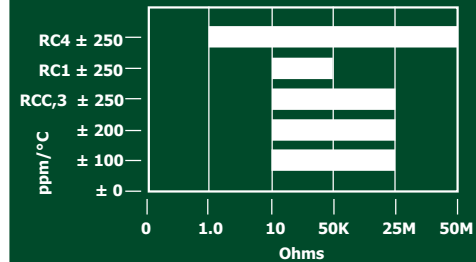

RCX, HCX 0805 Series High Megohm and Gighm

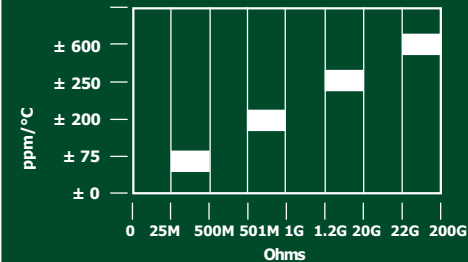

RCX 0603 High Megohm

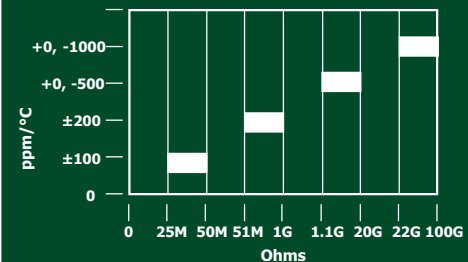

**Ask Us
About
Engineering
Kits!**

**Visit us on
the Web -
[http://
www.ims-
resistors.com](http://www.ims-resistors.com)**

**ims International
Manufacturing
Services, Inc.**

**50 Schoolhouse Lane
Portsmouth, RI 02871
Tel (401) 683-9700
Fax (401) 683-5571
e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>**