verical
An Arrow Company



MOC8101SMT&R
ISOCOM COMPONENTS

Buy Now

Looking for a discount?
Check out our current promotions!

Give us a call
1-855-837-4225
International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com
Order Support: support@verical.com
Suppliers: Visit our seller page

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

MOC8101X,MOC8102X,MOC8103X,
MOC8104X,MOC8105X MOC8101,
MOC8102, MOC8103,MOC8104,MOC8105

NON-BASE LEAD OPTICALLY COUPLED ISOLATOR PHOTOTRANSISTOR OUTPUT

ROHS COMPLIANT

APPROVALS

- UL recognised, File No. E91231
  Package Code " GG "

'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead form : -
  - STD
  G form
  - SMD approved to CECC 00802
- Certified to EN60950 by :-
  Nemko - Certificate No. P01102464

DESCRIPTION

The MOC8101, MOC8102, MOC8103, MOC8104, MOC8105 series of optically coupled isolators consist of infrared light emitting diode and NPN silicon photo transistor in a standard 6 pin dual in line plastic package with the base pin unconnected.


FEATURES

- Options :-
  10mm lead spread - add G after part no.
  Surface mount - add SM after part no.
  Tape&reel - add SMT&R after part no.
- High Isolation Voltage ($5.3kV_{RMS}$, $7.5kV_{PK}$)
- Base pin unconnected for improved noise immunity in high EMI environment


APPLICATIONS

- DC motor controllers
- Industrial systems controllers
- Signal transmission between systems of different potentials and impedances


OPTION SM
SURFACE MOUNT



OPTION G



Dimensions in mm

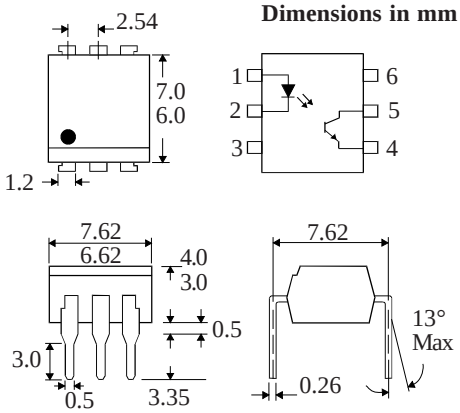

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUT DIODE

Forward Current	60mA
Reverse Voltage	6V
Power Dissipation	105mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO}	30V
Emitter-collector Voltage BV_{ECO}	6V
Collector Current	50mA
Power Dissipation	160mW

POWER DISSIPATION

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	


ISOCOM COMPONENTS 2004 LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1UD
Tel: (01429) 863609 Fax :(01429) 863581

ELECTRICAL CHARACTERISTICS (T_A= 25°C Unless otherwise noted)


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)	1.0	1.15	1.5	V	I_F = 10mA
	Reverse Current (I_R)			10	µA	V_R=6V
Output	Collector-emitter Breakdown (BV_{CEO}) (Note 2)	30			V	I_C = 1mA
	Emitter-collector Breakdown (BV_{ECO})	6			V	I_E = 100µA
	Collector-emitter Dark Current (I_{CEO})			50	nA	V_{CE} = 10V
Coupled	Output Collector Current (I_C) (Note 3)					
	MOC8101	5.0		8.0	mA	10mA I_F, 10V V_{CE}
	MOC8102	7.3		11.7	mA	10mA I_F, 10V V_{CE}
	MOC8103	10.8		17.3	mA	10mA I_F, 10V V_{CE}
	MOC8104	16		25.6	mA	10mA I_F, 10V V_{CE}
	MOC8105	6.5		13.3	mA	10mA I_F, 10V V_{CE}
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$		0.15	0.4	V	5mA I_F, 0.5mA I_C
	Input to Output Isolation Voltage V_{ISO}	5300			V_{RMS}	See note 1
		7500			V_{PK}	See note 1
	Input-output Isolation Resistance R_{ISO}	$5x10^{10}$			Ω	V_{IO} = 500V (note 1)
	Response Time (Rise), tr		2		µs	V_{CC} = 5V , I_F = 10mA
	Response Time (Fall), tf		2		µs	R_L = 75Ω, (FIG 1)

Note 1 Measured with input leads shorted together and output leads shorted together.
Note 2 Special Selections are available on request. Please consult the factory.
Note 3 Production testing - limits verified with pulse test


FIGURE1

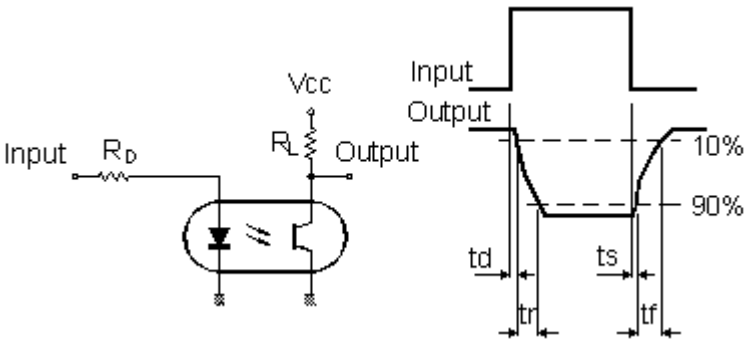


Collector Power Dissipation vs. Ambient Temperature

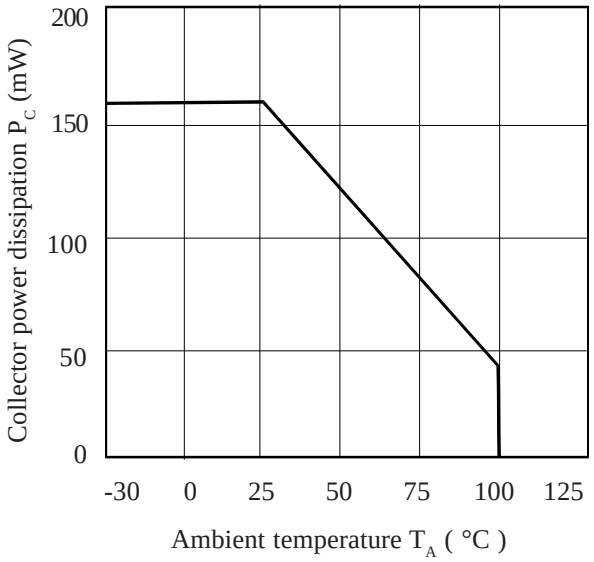


Collector Current vs. Collector-emitter Voltage

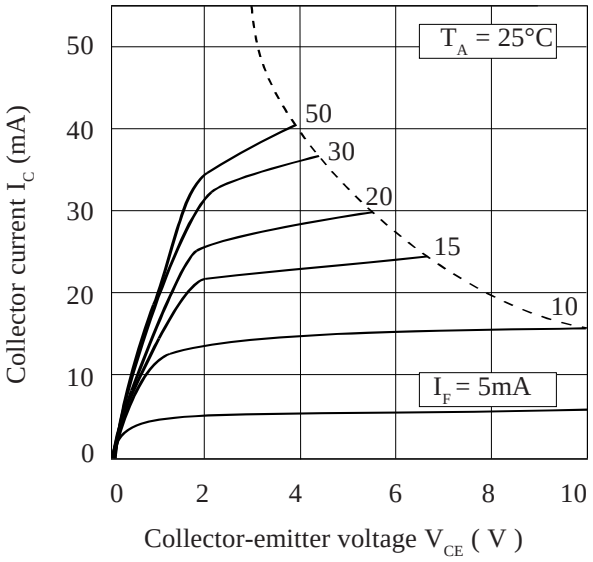


Forward Current vs. Ambient Temperature

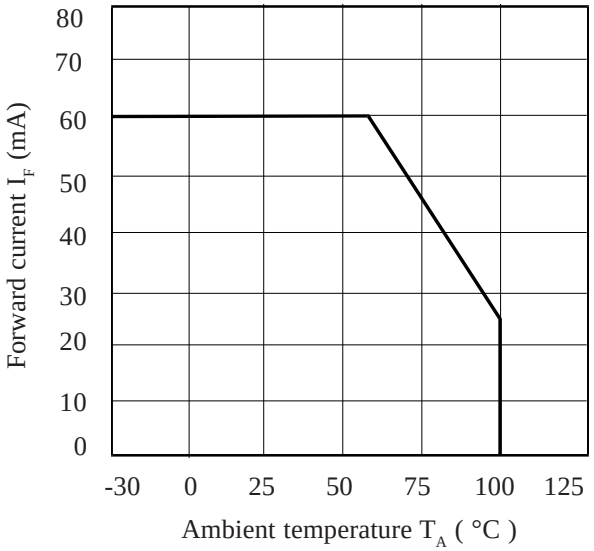

Current Transfer Ratio vs. Forward Current

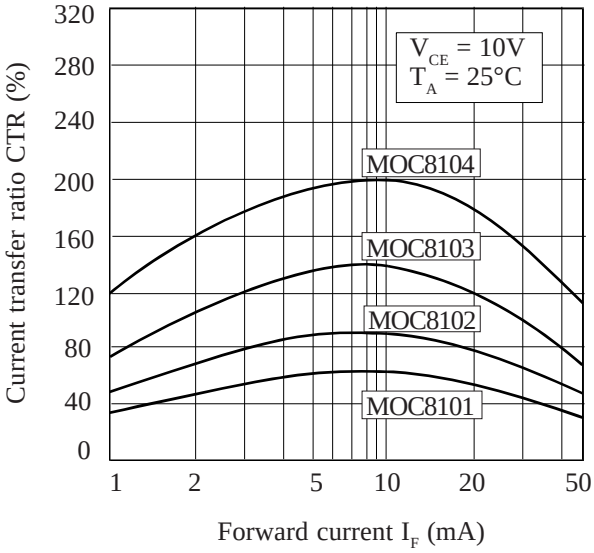

Relative Current Transfer Ratio vs. Ambient Temperature

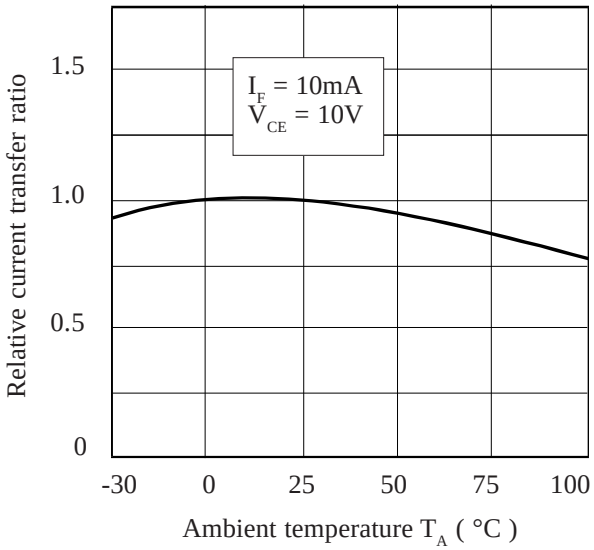

Collector-emitter Saturation Voltage vs. Ambient Temperature

