





A1251 Series 1.25mm pitch wafer (V-SMT Type)

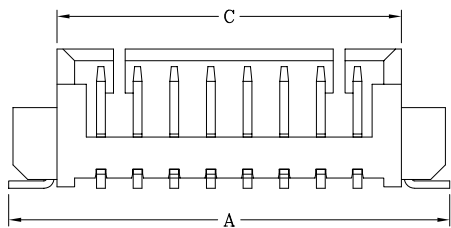


Features:

- * Available in 2 through 15 circuits
- * Material: Insulator: Nylon 6T UL 94V-0 (Dirty White)
Contact: 0.30mm (.012") flat pin, P. Bronze Tin Plated
- * Mates with JWT A1251 series socket

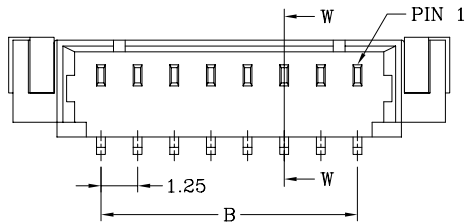

Section W-W

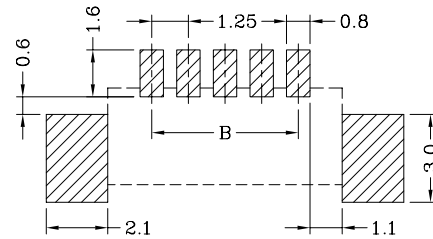

PCB LAYOUT




Dimensional & Ordering Information:

Circuits	Part No	Dimensions			Pcs/Bag
		A	B	C	
2	A1251WV0-2PS	7.55	1.25	4.25	1000
3	A1251WV0-3PS	8.80	2.50	5.50	1000
4	A1251WV0-4PS	10.05	3.75	6.75	1000
5	A1251WV0-5PS	11.30	5.00	8.00	1000
6	A1251WV0-6PS	12.55	6.25	9.25	1000
7	A1251WV0-7PS	13.80	7.50	10.50	1000
8	A1251WV0-8PS	15.05	8.75	11.75	1000
9	A1251WV0-9PS	16.30	10.00	13.00	1000
10	A1251WV0-10PS	17.55	11.25	14.25	1000
11	A1251WV0-11 PS	18.80	12.50	15.50	1000
12	A1251WV0-12 PS	20.05	13.75	16.75	1000
13	A1251WV0-13 PS	21.30	15.00	18.00	1000
14	A1251WV0-14 PS	22.55	16.25	19.25	1000
15	A1251WV0-15 PS	23.80	17.50	20.50	1000


A1251 Series 1.25mm pitch wafer (R- SMT Type)

Features:

- * Available in 2 through 15 circuits
- * Material: Insulator: Nylon 6T UL 94V-0 (Dirty White)
Contact: 0.30mm (.012") flat pin, P. Bronze Tin Plated
- * Mates with JWT A1251 series socket

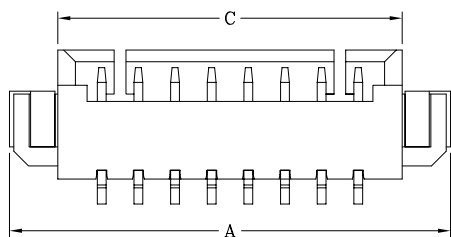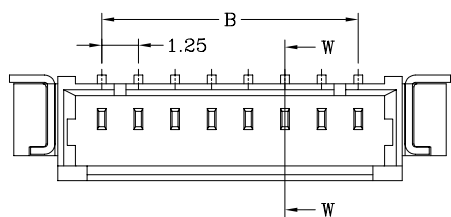

Section W-W

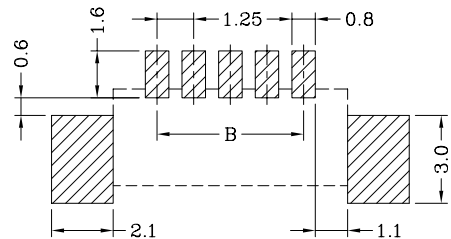

PCB LAYOUT

Dimensional & Ordering Information:

Circuits	Part No	Dimensions			Pcs/Bag
		A	B	C	
2	A1251WR0-2PS	7.55	1.25	4.25	1000
3	A1251WR0-3PS	8.80	2.50	5.50	1000
4	A1251WR0-4PS	10.05	3.75	6.75	1000
5	A1251WR0-5PS	11.30	5.00	8.00	1000
6	A1251WR0-6PS	12.55	6.25	9.25	1000
7	A1251WR0-7PS	13.80	7.50	10.50	1000
8	A1251WR0-8PS	15.05	8.75	11.75	1000
9	A1251WR0-9PS	16.30	10.00	13.00	1000
10	A1251WR0-10PS	17.55	11.25	14.25	1000
11	A1251WR0-11 PS	18.80	12.50	15.50	1000
12	A1251WR0-12 PS	20.05	13.75	16.75	1000
13	A1251WR0-13 PS	21.30	15.00	18.00	1000
14	A1251WR0-14 PS	22.55	16.25	19.25	1000
15	A1251WR0-15 PS	23.80	17.50	20.50	1000