


features

- Surface mount
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: Black body color with white marking (0603, 0805, 1008)
White body color with no marking (0402)
- Products with lead-free terminations meet EU RoHS requirements

dimensions and construction

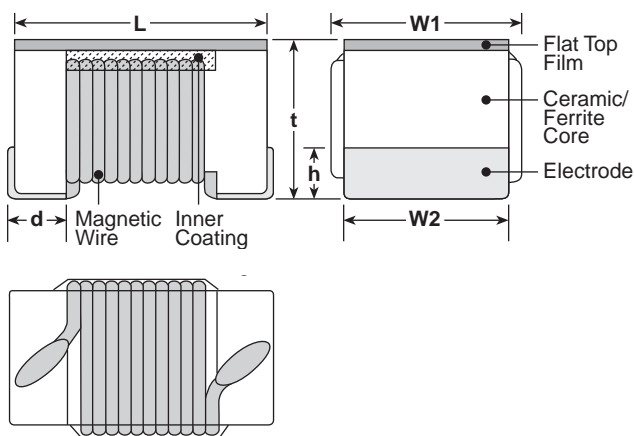

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ^{+0.008} ₋₀ (1.8 ^{+0.2} ₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Resistance 10N: 10nH R10: 0.1µH 1R0: 1.0µH	Tolerance B: ±0.1nH C: 0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Inductors

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQT0402T**1N0*	—	1.0	250	B: ± 0.1 nH C: ± 0.2 nH	16	250	11000	0.045	1360
KQT0402T**1N9*		1.9					9600	0.070	1040
KQT0402T**2N0*		2.0			8000				
KQT0402T**2N2*		2.2					7200	0.120	700
KQT0402T**2N4*		2.4			6000				
KQT0402T**2N7*		2.7					5800	0.083	760
KQT0402T**3N3*		3.3			4800				
KQT0402T**3N6*		3.6					5800	0.104	680
KQT0402T**3N9*		3.9			4400				
KQT0402T**4N3*		4.3					4200	0.104	680
KQT0402T**4N7*		4.7		4000	0.150	650			
KQT0402T**5N1*		5.1					3900	0.195	480
KQT0402T**5N6*		5.6		3680	0.120	640			
KQT0402T**6N2*		6.2					3600	0.180	560
KQT0402T**6N8*		6.8		3100	0.200	500			
KQT0402T**7N5*		7.5					25	0.230	480
KQT0402T**8N2*		8.2		24	0.202	480			
KQT0402T**8N7*		8.7					25	0.250	450
KQT0402T**9N0*		9.0		25	0.323	400			
KQT0402T**9N5*		9.5					24	0.214	400
KQT0402T**10N*		10		24	0.322	400			
KQT0402T**11N*		11					24	0.298	400
KQT0402T**12N*		12		24	0.354	400			
KQT0402T**13N*		13					24	0.393	340
KQT0402T**15N*		15		24	0.550	320			
KQT0402T**16N*		16					25	0.560	320
KQT0402T**18N*		18		25	0.550	300			
KQT0402T**19N*		19					24	0.620	320
KQT0402T**20N*		20		25	0.810	300			
KQT0402T**22N*		22					20	0.830	150
KQT0402T**23N*		23		25	0.835	240			
KQT0402T**24N*		24					25	1.170	200
KQT0402T**27N*		27		22	1.120	140			
KQT0402T**30N*		30					22	1.800	130
KQT0402T**33N*		33		22	2.090	130			
KQT0402T**34N*		34					22	2.320	120
KQT0402T**36N*		36		22	2.320	120			
KQT0402T**39N*		39					22	2.320	120
KQT0402T**40N*		40		22	2.320	120			
KQT0402T**43N*		43					22	2.320	120
KQT0402T**47N*	47	22	2.320	120					
KQT0402T**51N*	51				22	2.320	120		
KQT0402T**56N*	56	22	2.320	120					
KQT0402T**68N*	68				22	2.320	120		
KQT0402T**82N*	82	22	2.320	120					
KQT0402T**R10*	100				22	2.320	120		
KQT0402T**R12*	120	22	2.320	120					

* Add tolerance character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to pages 232-233.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

2/27/07

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22		6900	0.055	
KQ0603TTE3N6*	E	3.6						0.063	
KQ0603TTE3N9*	1	3.9					5900	0.08	
KQ0603TTE4N3*	F	4.3						0.063	
KQ0603TTE4N7*	G	4.7			20		5800	0.116	
KQ0603TTE5N1*	Y	5.1						0.115	
KQ0603TTE6N8*	2	6.8			27		4800	0.11	
KQ0603TTE7N5*	H	7.5						0.106	
KQ0603TTE8N2*	A	8.2		28	4600		0.12		
KQ0603TTE8N7*	J	8.7					0.109		
KQ0603TTE9N5*	B	9.5		31	4800		0.125		
KQ0603TTE10N*	3	10					0.13		
KQ0603TTE11N*	K	11		33	4000		0.086		
KQ0603TTE12N*	4	12					0.13		
KQ0603TTE15N*	5	15		35	3300		0.17		
KQ0603TTE16N*	L	16					0.104		
KQ0603TTE18N*	6	18		34	3100		0.17		
KQ0603TTE22N*	7	22					0.19		
KQ0603TTE23N*	S	23	38	3000	0.15				
KQ0603TTE24N*	M	24			0.135				
KQ0603TTE27N*	8	27	40	2800	0.22				
KQ0603TTE30N*	N	30			0.144				
KQ0603TTE33N*	9	33	37	2300	0.22				
KQ0603TTE36N*	P	36			0.25				
KQ0603TTE39N*	0	39	38	2080	0.28				
KQ0603TTE43N*	Q	43				0.30			
KQ0603TTE47N*	1	47	40	2200	0.31				
KQ0603TTE51N*	T	51				0.34			
KQ0603TTE47N*	1	47	39	2000	0.34				
KQ0603TTE51N*	T	51				0.49			
KQ0603TTE56N*	2	56	38	1900	0.54				
KQ0603TTE68N*	3	68				0.58			
KQ0603TTE72N*	4	72	37	1700	0.61				
KQ0603TTE82N*	5	82				0.65			
KQ0603TTER10*	6	100	34	1500	0.92				
KQ0603TTER11*	7	110				1400			
KQ0603TTER12*	8	120	32	1350	2.2				
KQ0603TTER15*	9	150				1300			
KQ0603TTER18*	0	180	25	1200	2.3				
KQ0603TTER20*	U	200				130			
KQ0603TTER21*	V	210	24	1000	2.4				
KQ0603TTER22*	1	220				120			
KQ0603TTER25*	W	250	24	900	2.3				
KQ0603TTER27*	2	270				170			
KQ0603TTER33*	3	330	30	800	3.0				
KQ0603TTER39*	4	390				100			
KQ0603TTER47*	5	470	50	700	3.7				
KQ0603TTER51*	V	510				80			
KQ0603TTER56*	6	560				190			
				J: ±5% K: ±10%	30	50	640	1.21	190
							610	1.26	170
							560	2.09	130

NEW

* Add tolerance character (B, C, G, H, J, K, M)

For complete environmental specifications, please refer to pages 232-233.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

2/24/08

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)											
NEW	KQ0603TTER62*	W	620	50	J: $\pm 5\%$ K: $\pm 10\%$	30	50	590	1.89	150										
	KQ0603TTER68*	7	680					540	1.97	140										
	KQ0603TTER75*	X	750					530	2.04	130										
	KQ0603TTER82*	8	820					490	3.09	110										
	KQ0603TTER91*	Y	910					480	2.95	120										
	KQ0603TTE1R0*	9	1000					440	5.13	90										
	KQ0603TTE1R2*	0	1200					400	5.45	80										
NEW	KQ0805TTE3N3*	0	3.3	250	50	50	1500	6000	0.08	600										
	KQ0805TTE6N8*	1	6.8				1000	5500	0.11											
	KQ0805TTE8N2*	2	8.2				4700	0.12												
	KQ0805TTE12N*	3	12				4000	0.15												
	KQ0805TTE15N*	4	15				3400	0.17												
	KQ0805TTE18N*	5	18				3300	0.20												
	KQ0805TTE20N*	Y	20				500	60	50		2600	0.22	500							
	KQ0805TTE22N*	6	22								2500	0.25								
	KQ0805TTE27N*	7	27								2050	0.27								
	KQ0805TTE33N*	8	33								2000	0.29								
KQ0805TTE39N*	9	39	1650	0.34																
KQ0805TTE43N*	4	43	1550	0.31																
KQ0805TTE47N*	0	47	1500	0.34																
KQ0805TTE56N*	1	56	1450	0.38																
KQ0805TTE68N*	2	68	1300	0.42																
KQ0805TTE82N*	3	82	1200	0.46																
NEW	KQ0805TTER10*	4	100	150	G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$	65	1100	0.51	400											
	KQ0805TTER12*	5	120				920	0.56												
	KQ0805TTER15*	6	150				250	50		50	870	0.64								
	KQ0805TTER16*	H	160																	
	KQ0805TTER17*	J	170																	
	KQ0805TTER18*	7	180																	
	KQ0805TTER19*	D	190																	
	KQ0805TTER20*	E	200																	
	KQ0805TTER21*	F	210																	
	KQ0805TTER22*	8	220																	
KQ0805TTER23*	K	230																		
KQ0805TTER24*	L	240																		
NEW	KQ0805TTER25*	G	250	100	48	250	850	0.70	350											
	KQ0805TTER27*	9	270				650	1.0												
	KQ0805TTER33*	0	330				600	1.4		310										
	KQ0805TTER39*	1	390				560	1.5		290										
	KQ0805TTER47*	2	470				50	25		33	100	375	1.76	250						
	KQ0805TTER56*	3	560				J: $\pm 5\%$ K: $\pm 10\%$					23	50	340	1.9	230				
	KQ0805TTER68*	4	680											188	2.2	190				
	KQ0805TTER82*	5	820											215	2.35	180				
	KQ1008TTE10N*	10N	10											50	J: $\pm 5\%$ K: $\pm 10\%$ M: $\pm 20\%$	50	500	4100	0.08	1000
	KQ1008TTE12N*	12N	12															3300	0.09	
KQ1008TTE15N*	15N	15	3000	0.10																
KQ1008TTE18N*	18N	18	350	2500	0.11															

* Add tolerance character (C, G, H, J, K, M)

For complete environmental specifications, please refer to pages 232-233.

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ1008TTE22N*	22N	22	50	J: $\pm 5\%$ K: $\pm 10\%$ M: $\pm 20\%$	55	350	2400	0.12	1000
KQ1008TTE27N*	27N	27					60	1600	
KQ1008TTE33N*	33N	33			65			1500	
KQ1008TTE39N*	39N	39					60		
KQ1008TTE47N*	47N	47			65			0.16	
KQ1008TTE56N*	56N	56					60	0.18	
KQ1008TTE68N*	68N	68			60			0.20	
KQ1008TTE82N*	82N	82					60	0.22	
KQ1008TTER10*	R10	100	25	G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$	45	100		1000	0.56
KQ1008TTER12*	R12	120					45	950	0.63
KQ1008TTER15*	R15	150			45			850	0.70
KQ1008TTER18*	R18	180					45		750
KQ1008TTER22*	R22	220			45			700	0.84
KQ1008TTER27*	R27	270					45	600	0.91
KQ1008TTER33*	R33	330			45			570	1.05
KQ1008TTER39*	R39	390					45	500	1.12
KQ1008TTER47*	R47	470			45			450	1.19
KQ1008TTER56*	R56	560					45	415	1.33
KQ1008TTER62*	R62	620			45			375	1.40
KQ1008TTER68*	R68	680					45		360
KQ1008TTER75*	R75	750			45			360	
KQ1008TTER82*	R82	820					45		350
KQ1008TTER91*	R91	910			35			320	
KQ1008TTE1R0*	1R0	1000					35		290
KQ1008TTE1R2*	1R2	1200	35	250	1.6	310			
KQ1008TTE1R5*	1R5	1500			28		200	1.7	
KQ1008TTE1R8*	1R8	1800	28	160		1.9		270	
KQ1008TTE2R2*	2R2	2200			22	140	2.2	250	
KQ1008TTE2R7*	2R7	2700	22	110			2.7	230	
KQ1008TTE3R3*	3R3	3300			20	100	2.8		
KQ1008TTE3R9*	3R9	3900	20	90			3.1	210	
KQ1008TTE4R7*	4R7	4700			15	80	2.2	240	
KQ1008TTE5R6*	5R6	5600	15	70			2.5	200	
KQ1008TTE6R8*	6R8	6800			15	65	2.8	170	
KQ1008TTE8R2*	8R2	8200	15	60			3.2	150	
KQ1008TTE100*	100	10000			15	60	3.2	150	

* Add tolerance character (C, G, H, J, K, M)

inductors





For complete environmental specifications, please refer to pages 232-233.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.





2/24/08

environmental applications

L-Frequency Characteristics

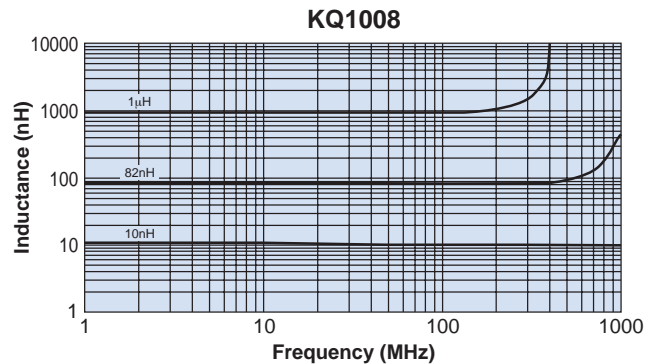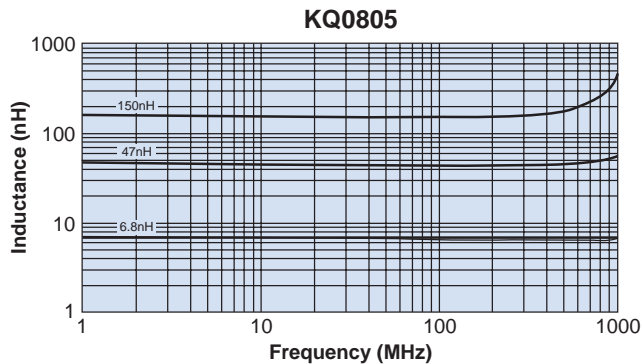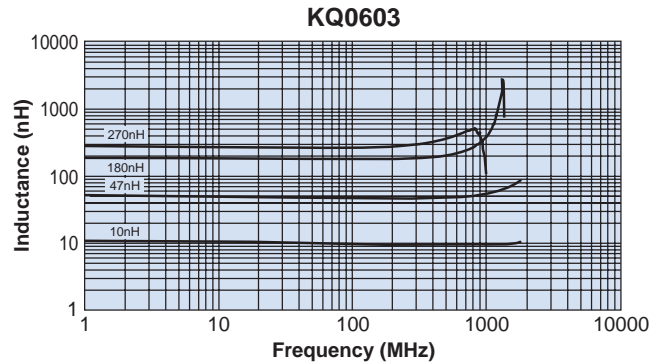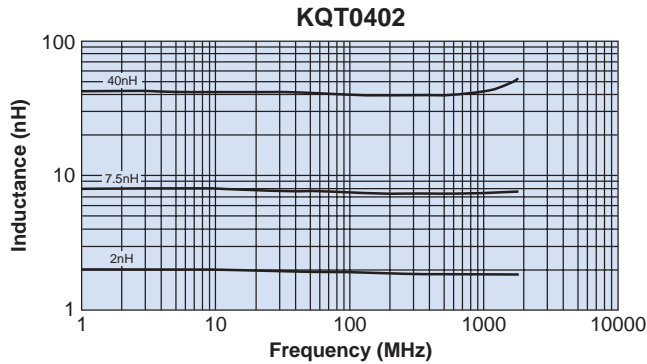

Q-Frequency Characteristics

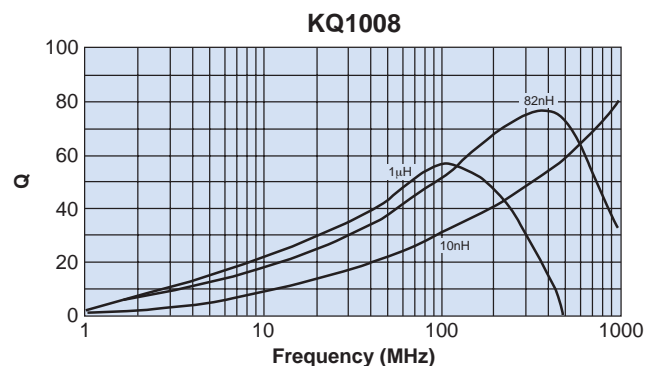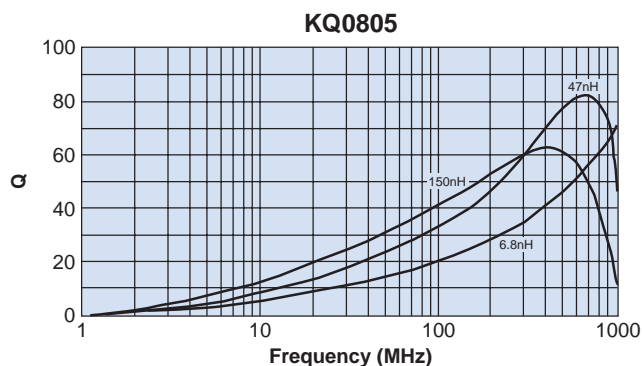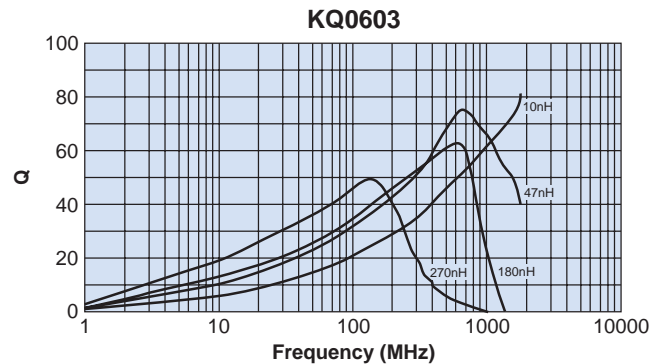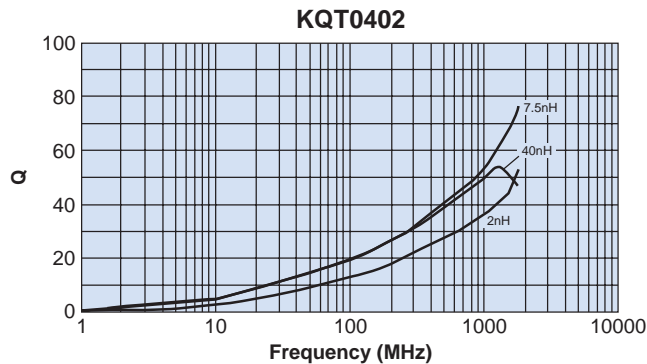

Test equipment: HP4291A impedance analyzer

environmental applications (continued)

Performance Characteristics

Parameter	Maximum Δ L	Test Method
Dielectric Withstanding Voltage	No evidence of flaming, fuming or breakdown	5 seconds @ AC 500V applied between both terminals and film
Insulation Resistance	1000M Ω and over	1 minute @ DC 100V measured between both terminals and film
Flammability	IEC 695-2-2	Withstands needle-flame test
Terminal Pull Strength	No evidence of damage	Terminals shall withstand a pull of 10N in a horizontal direction (KQ0402 and KQ0603 = 5N, KQ0805 and KQ1008 = 10N)
Terminal Bending Strength	No evidence of breakdown	Specimen shall be soldered on bend test board and force applied to the opposite side to cause a 10mm deflection (KQ0603 = 3mm deflection)
Vibration	Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	2 hours in each direction of X, Y, Z on PCB at a frequency range of 10 - 55 - 10Hz with 1.5mm amplitude
Dropping	No evidence of damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	Dropping 1m on the ground of concrete, 1 time
Resistance to Solder Heat	No evidence of outer damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	Immerse in solder @ $260^{\circ} \pm 5^{\circ}\text{C}$ for 10 seconds ± 1 second
Solderability	95% of the terminal should be covered with new solder	Immerse in solder @ $230^{\circ} \pm 5^{\circ}\text{C}$ for 3 seconds ± 0.5 second
Resistance to Solvents	No damage and marking must remain legible	Accordance with MIL-STD-202, Method 215
Low Temperature Storage	No evidence of damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	Store @ $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 1000 hours
High Temperature Storage	No evidence of damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	Store @ $+125^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 1000 hours
Moisture Endurance	No evidence of damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	$40^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 90 - 95% RH, 1000 hours KQT0402: $60^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 90 - 95% RH, 1000 hours
Load Life	No evidence of damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	Biased to full rated current @ $+125^{\circ}\text{C}$, 1000 hours
High Temperature High Humidity	No evidence of damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	Biased to 10% rated current @ $+85^{\circ}\text{C}$, 85% RH, 1000 hours
Thermal Shock	No evidence of damage Δ L/L within $\pm 5\%$ Δ Q/Q within $\pm 10\%$	100 cycles between $-40^{\circ}\text{C}/\text{hour}$ and $+125^{\circ}\text{C}/\text{hour}$
Temperature Characteristics	Δ L/L within $\pm 5\%$	Δ L/L to be measured at the temperatures between -40°C and $+125^{\circ}\text{C}$, reference to the inductance @ 20°C

Unless otherwise specified, measurements shall be performed within 2 hours after leaving test samples for more than one hour at the normal temperature and at the normal humidity.