




REA

Aluminum Electrolytic Capacitors

CE04 Type

Features

- 85°C, 2000 ~ 3000 hours assured
- Standard series for general purpose

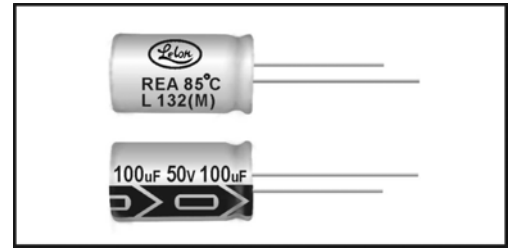


SPECIFICATIONS

Items	Performance																																																																																	
Operating Temperature Range	-40°C ~ +85°C																																																																																	
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																																																	
Leakage Current (at 20°C)	<table border="1"> <tr> <td>Rated voltage</td> <td>≤ 100V</td> <td colspan="2">> 100V</td> </tr> <tr> <td>Time</td> <td>after 2 minutes</td> <td colspan="2">after 5 minutes</td> </tr> <tr> <td>Leakage Current</td> <td>I = 0.01CV or 3 (µA) whichever is greater</td> <td>CV ≤ 1000 I=0.03CV+15(µA)</td> <td>CV > 1000 I=0.02CV+25(µA)</td> </tr> </table> <p>Where, C= rated capacitance in µF. V = rated DC working voltage in V.</p>	Rated voltage	≤ 100V	> 100V		Time	after 2 minutes	after 5 minutes		Leakage Current	I = 0.01CV or 3 (µA) whichever is greater	CV ≤ 1000 I=0.03CV+15(µA)	CV > 1000 I=0.02CV+25(µA)																																																																					
Rated voltage	≤ 100V	> 100V																																																																																
Time	after 2 minutes	after 5 minutes																																																																																
Leakage Current	I = 0.01CV or 3 (µA) whichever is greater	CV ≤ 1000 I=0.03CV+15(µA)	CV > 1000 I=0.02CV+25(µA)																																																																															
Dissipation Factor (Tan δ at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>Tan δ (max)</td> <td>0.23</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.12</td> <td>0.14</td> <td>0.17</td> <td>0.20</td> <td>0.25</td> <td>0.25</td> </tr> </table> <p>When the capacitance exceeds 1000 µF, 0.02 shall be added every 1000 µF increase.</p>	Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	Tan δ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.25	0.25																																																			
Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																																																																				
Tan δ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.25	0.25																																																																				
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td colspan="2">Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td rowspan="4">Impedance Ratio</td> <td>Z(-25°C)</td> <td>φ D < 16</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> <td>8</td> <td>12</td> <td>14</td> <td>16</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φ D ≥ 16</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> </tr> <tr> <td>Z(-40°C)</td> <td>φ D < 16</td> <td>10</td> <td>8</td> <td>6</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φ D ≥ 16</td> <td>18</td> <td>16</td> <td>12</td> <td>10</td> <td>8</td> <td>8</td> <td>6</td> <td>6</td> <td>4</td> <td>8</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> </tr> </table>	Rated Voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	Impedance Ratio	Z(-25°C)	φ D < 16	6	4	3	3	2	2	2	2	3	6	8	12	14	16	/Z(+20°C)	φ D ≥ 16	8	6	4	4	3	3	3	3	4	8	10	10	10	10	Z(-40°C)	φ D < 16	10	8	6	6	4	3	3	3	4	8	10	10	10	10	/Z(+20°C)	φ D ≥ 16	18	16	12	10	8	8	6	6	4	8	10	10	10	10
Rated Voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																																																																			
Impedance Ratio	Z(-25°C)	φ D < 16	6	4	3	3	2	2	2	2	3	6	8	12	14	16																																																																		
	/Z(+20°C)	φ D ≥ 16	8	6	4	4	3	3	3	3	4	8	10	10	10	10																																																																		
	Z(-40°C)	φ D < 16	10	8	6	6	4	3	3	3	4	8	10	10	10	10																																																																		
	/Z(+20°C)	φ D ≥ 16	18	16	12	10	8	8	6	6	4	8	10	10	10	10																																																																		
Load Life Test	<table border="1"> <tr> <td>Test Time</td> <td>2000 hrs (3000 hrs for φ D ≥ 10mm)</td> </tr> <tr> <td>Capacitance Change</td> <td>With in ±20% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2000/3000 hrs at 85°C.</p>	Test Time	2000 hrs (3000 hrs for φ D ≥ 10mm)	Capacitance Change	With in ±20% of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value																																																																									
Test Time	2000 hrs (3000 hrs for φ D ≥ 10mm)																																																																																	
Capacitance Change	With in ±20% of initial value																																																																																	
Dissipation Factor	Less than 200% of specified value																																																																																	
Leakage Current	Within specified value																																																																																	
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1000 hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>With in ±20% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hrs at 85°C without voltage applied.</p>	Test Time	1000 hrs	Capacitance Change	With in ±20% of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value																																																																									
Test Time	1000 hrs																																																																																	
Capacitance Change	With in ±20% of initial value																																																																																	
Dissipation Factor	Less than 200% of specified value																																																																																	
Leakage Current	Within specified value																																																																																	
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td rowspan="4">Cap. (µF)</td> <td>Freq. (Hz)</td> <td>60 (50)</td> <td>120</td> <td>500</td> <td>1K</td> <td>10K up</td> </tr> <tr> <td>Under 100</td> <td>0.70</td> <td>1.00</td> <td>1.30</td> <td>1.40</td> <td>1.50</td> </tr> <tr> <td>100 to 1000</td> <td>0.75</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.35</td> </tr> <tr> <td>1000 up above</td> <td>0.80</td> <td>1.00</td> <td>1.10</td> <td>1.12</td> <td>1.15</td> </tr> </table>	Cap. (µF)	Freq. (Hz)	60 (50)	120	500	1K	10K up	Under 100	0.70	1.00	1.30	1.40	1.50	100 to 1000	0.75	1.00	1.20	1.30	1.35	1000 up above	0.80	1.00	1.10	1.12	1.15																																																								
Cap. (µF)	Freq. (Hz)		60 (50)	120	500	1K	10K up																																																																											
	Under 100		0.70	1.00	1.30	1.40	1.50																																																																											
	100 to 1000		0.75	1.00	1.20	1.30	1.35																																																																											
	1000 up above	0.80	1.00	1.10	1.12	1.15																																																																												
Ripple Current & Temperature Multipliers	<table border="1"> <tr> <td>Temperature(°C)</td> <td>70</td> <td>85</td> </tr> <tr> <td>Multiplier</td> <td>1.40</td> <td>1.00</td> </tr> </table>	Temperature(°C)	70	85	Multiplier	1.40	1.00																																																																											
Temperature(°C)	70	85																																																																																
Multiplier	1.40	1.00																																																																																
Standards	Satisfies Characteristic W of JIS C 5141																																																																																	

CE04 Type

DIAGRAM OF DIMENSIONS

Unit: mm

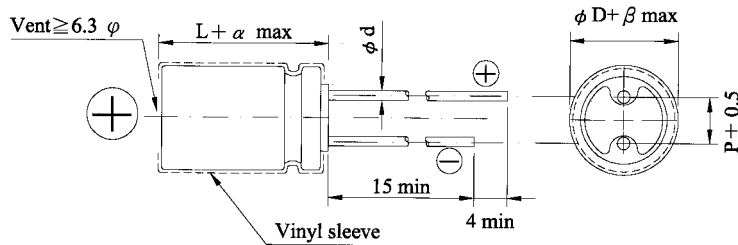

LEAD SPACING AND DIAMETER

ϕD	5	6.3	8	10	13	16	18	22	25
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	12.5
ϕd	0.5		0.6			0.8		1.0	
α	1.0			1.5			2.0		
β	0.5								

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 120 Hz, 85°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

μF	V. DC Contents	6.3V(0J)				10V(1A)				16V(1C)				25V(1E)			
		$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA
4.7	4R7																
10	100									5 × 11	49			5 × 11	54		
22	220					5 × 11	70			5 × 11	75			5 × 11	80		
33	330	5 × 11	72			5 × 11	84			5 × 11	90			5 × 11	97		
47	470	5 × 11	90			5 × 11	100			5 × 11	110			5 × 11	115		
100	101	5 × 11	130			5 × 11	145			6.3 × 11	180	5 × 11	160	6.3 × 11	190		
220	221	6.3 × 11	230	5 × 11	200	6.3 × 11	250	5 × 11	220	8 × 11.5	300	6.3 × 11	260	8 × 11.5	320		
330	331	8 × 11.5	290	6.3 × 11	270	8 × 11.5	350	6.3 × 11	290	8 × 11.5	370			10 × 12.5	470	8 × 11.5	440
470	471	8 × 11.5	380	6.3 × 11	320	8 × 11.5	415	6.3 × 11	350	10 × 12.5	520	8 × 11.5	440	10 × 16	620	10 × 12.5	545
1000	102	8 × 11.5	540			10 × 12.5	650			10 × 16	785			13 × 20	1090	10 × 20	955
2200	222	10 × 20	1000			13 × 20	1240	10 × 20	1070	13 × 20	1295			16 × 25	1660	13 × 25	1540
3300	332	13 × 20	1380	10 × 20	1185	13 × 20	1420			16 × 25	1840	13 × 25	1655	16 × 31.5	2070	16 × 25	1975
4700	472	16 × 25	1880	13 × 20	1545	16 × 25	1980	13 × 25	1780	16 × 31.5	2260	16 × 25	2090	18 × 35.5	2520	16 × 31.5	2420
6800	682	16 × 25	2120	13 × 25	1880	16 × 25	2220			16 × 31.5	2520			18 × 35.5	2880		
10000	103	16 × 31.5	2500	16 × 25	2330	18 × 35.5	2880	16 × 35.5	2670	18 × 40	3080	18 × 35.5	2920	22 × 40	3440	18 × 40	3080
22000	223	22 × 40	3700	18 × 40	3320	22 × 40	3790	18 × 40	3370	22 × 40	3900						

μF	V. DC Contents	35V(1V)				50V(1H)				63V(1J)				100V(2A)			
		$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA
0.1	0R1					5 × 11	1.5			5 × 11	3			5 × 11	3		
0.22	R22					5 × 11	3.5			5 × 11	4.5			5 × 11	5.8		
0.33	R33					5 × 11	5			5 × 11	7.5			5 × 11	8.8		
0.47	R47					5 × 11	7			5 × 11	9.5			5 × 11	12		
1	010					5 × 11	15			5 × 11	17			5 × 11	22		
2.2	2R2					5 × 11	29			5 × 11	28			5 × 11	33		
3.3	3R3					5 × 11	35			5 × 11	34			5 × 11	40		
4.7	4R7	5 × 11	40			5 × 11	42			5 × 11	45			5 × 11	48		
10	100	5 × 11	58			5 × 11	65			5 × 11	70			6.3 × 11	80		
22	220	5 × 11	87			5 × 11	95			6.3 × 11	115			8 × 11.5	135	6.3 × 11	115
33	330	6.3 × 11	115	5 × 11	108	6.3 × 11	136	5 × 11	125	8 × 11.5	150	6.3 × 11	140	10 × 16	195	8 × 11.5	145
47	470	6.3 × 11	145	5 × 11	130	6.3 × 11	165			8 × 11.5	190	6.3 × 11	170	10 × 16	255	10 × 12.5	235
100	101	8 × 11.5	240	6.3 × 11	210	8 × 11.5	260			10 × 12.5	320			10 × 20	370		
220	221	10 × 12.5	420	8 × 11.5	385	10 × 16	490	10 × 12.5	455	10 × 20	565	10 × 16	490	13 × 25	675	13 × 20	640
330	331	10 × 16	570	10 × 12.5	490	13 × 20	635	10 × 16	585	13 × 20	765	10 × 20	710	16 × 31.5	972	16 × 25	825
470	471	10 × 16	740			13 × 20	860	10 × 20	755	16 × 25	1050	13 × 20	900	18 × 35.5	1135	16 × 31.5	1070
1000	102	13 × 20	1145			16 × 25	1530	13 × 25	1340	16 × 31.5	1700	16 × 25	1560	22 × 40	2600	18 × 40	2410
2200	222	16 × 31.5	1890	16 × 25	1785	18 × 40	2231	16 × 35.5	2075	18 × 40	2385						
3300	332	18 × 35.5	2430	16 × 35.5	2275	22 × 40	2785	18 × 35.5	2500	22 × 40	3000						
4700	472	18 × 40	2890	18 × 35.5	2700	25 × 40	3300	22 × 40	3155	25 × 40	3560						

Case size in mark of "*" is smaller.



REA

Aluminum Electrolytic Capacitors

CE04 Type

Dimension: $\varphi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 85°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

V. DC		160V(2C)				200V(2D)				250V(2E)			
μF	Contents	$\varphi D \times L$	mA	* $\varphi D \times L$	mA	$\varphi D \times L$	mA	* $\varphi D \times L$	mA	$\varphi D \times L$	mA	* $\varphi D \times L$	mA
0.47	R47	6.3 × 11	15	5 × 11	13	6.3 × 11	16	5 × 11	14	8 × 11.5	21		
1	010	6.3 × 11	24	5 × 11	20	6.3 × 11	25	5 × 11	21	8 × 11.5	32		
2.2	2R2	6.3 × 11	34	5 × 11	29	8 × 11.5	44	6.3 × 11	37	8 × 11.5	49	6.3 × 11	42
3.3	3R3	8 × 11.5	50	6.3 × 11	43	8 × 11.5	54	6.3 × 11	46	10 × 12.5	70	8 × 11.5	60
4.7	4R7	8 × 11.5	60	6.3 × 11	51	10 × 12.5	76	8 × 11.5	64	10 × 16	93	8 × 11.5	72
10	100	10 × 16	115	10 × 12.5	104	10 × 20	138	10 × 12.5	112	10 × 20	150	10 × 16	138
22	220	13 × 20	216	10 × 20	189	13 × 20	234	10 × 20	204	13 × 20	255	10 × 20	220
33	330	13 × 20	270	10 × 20	228	13 × 25	318	13 × 20	288	13 × 25	348	13 × 20	310
47	470	13 × 25	354	13 × 20	318	16 × 25	426	13 × 25	378	16 × 25	468	13 × 25	420
100	101	16 × 25	582	13 × 25	510	16 × 35.5	678	16 × 25	582	18 × 40	822	16 × 35.5	732
220	221	18 × 35.5	900	16 × 31.5	792	18 × 40	1062	18 × 35.5	1002	22 × 40	1134		
330	331	18 × 40	1010	18 × 35.5	984								

V. DC		350V(2V)				400V(2G)				450V(2W)			
μF	Contents	$\varphi D \times L$	mA	* $\varphi D \times L$	mA	$\varphi D \times L$	mA	* $\varphi D \times L$	mA	$\varphi D \times L$	mA	* $\varphi D \times L$	mA
0.47	R47	8 × 11.5	21	6.3 × 11	18	10 × 12.5	26	8 × 11.5	21	10 × 12.5	26	8 × 11.5	21
1	010	8 × 11.5	32	6.3 × 11	27	10 × 12.5	38	8 × 11.5	32	10 × 12.5	38	8 × 11.5	32
2.2	2R2	10 × 16	63	8 × 11.5	49	10 × 16	63	10 × 12.5	57	10 × 16	63	10 × 12.5	57
3.3	3R3	10 × 16	78	10 × 12.5	70	10 × 20	86	10 × 16	78	10 × 20	86	10 × 16	78
4.7	4R7	10 × 20	103	10 × 16	93	13 × 20	120	10 × 20	103	13 × 20	120	10 × 20	103
10	100	13 × 20	174	10 × 20	150	13 × 25	192	13 × 20	174	13 × 25	192	13 × 20	174
22	220	13 × 25	282	13 × 20	255	16 × 25	318	13 × 25	280	16 × 25	354		
33	330	16 × 31.5	438	16 × 25	390	16 × 35.5	426	16 × 25	325	18 × 35.5	426	16 × 31.5	378
47	470	16 × 35.5	500	16 × 31.5	474	18 × 35.5	585	16 × 31.5	395	18 × 40	555	16 × 35.5	414
100	101	18 × 40	685			22 × 40	710			22 × 45	750		

Case size in mark of “*” is smaller.

※Low-Profile Size

V. DC		6.3V(0J)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)	
μF	Contents	$\varphi D \times L$	mA	$\varphi D \times L$	mA	$\varphi D \times L$	mA	$\varphi D \times L$	mA	$\varphi D \times L$	mA	$\varphi D \times L$	mA
470	471											16 × 16	745
1000	102							13 × 16	830	16 × 16	1010	16 × 20	1160
2200	222			13 × 16	970	16 × 16	1160	16 × 20	1360	18 × 20	1560		
3300	332			16 × 16	1310	16 × 20	1460	18 × 20	1720	18 × 25	1970		
4700	472	16 × 16	1410	16 × 20	1560	18 × 20	1770	18 × 25	2070				
6800	682	16 × 20	1660	18 × 20	1870	18 × 25	2170						
10000	103	18 × 20	2020	18 × 25	2370								

V. DC		160V(2C)		200V(2D)		250V(2E)	
μF	Contents	$\varphi D \times L$	mA	$\varphi D \times L$	mA	$\varphi D \times L$	mA
22	220					13 × 16	280
33	330			16 × 16	350	16 × 16	350
47	470	16 × 16	420	16 × 20	420	16 × 20	420
68	680	16 × 20	490	18 × 20	490	18 × 20	490
100	101	18 × 20	590	18 × 25	590		
150	151	18 × 25	710				