
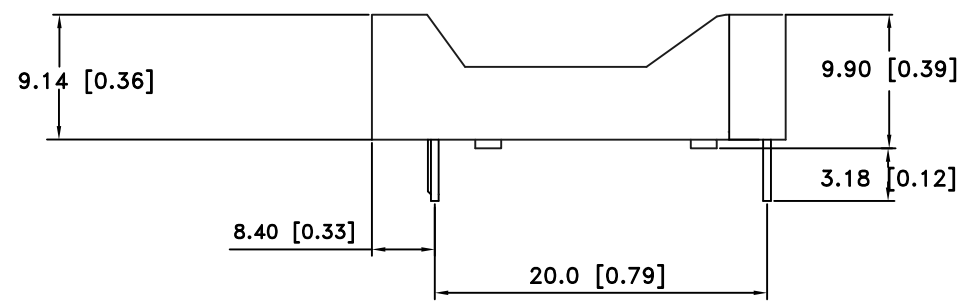



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/04/07	B	REDRAWN ADDED "ROHS COMPLIANT"	T.B.	B.S.	
12/09/11	C	UPDATED NOTES	T.B.	B.S.	
02/03/12	D	REMOVED "SOLDER DIPPED TAILS" FROM NOTES	T.B.	B.S.	
03/30/12	E	Dim. 1.17 was 1.02	T.B.	B.S.	

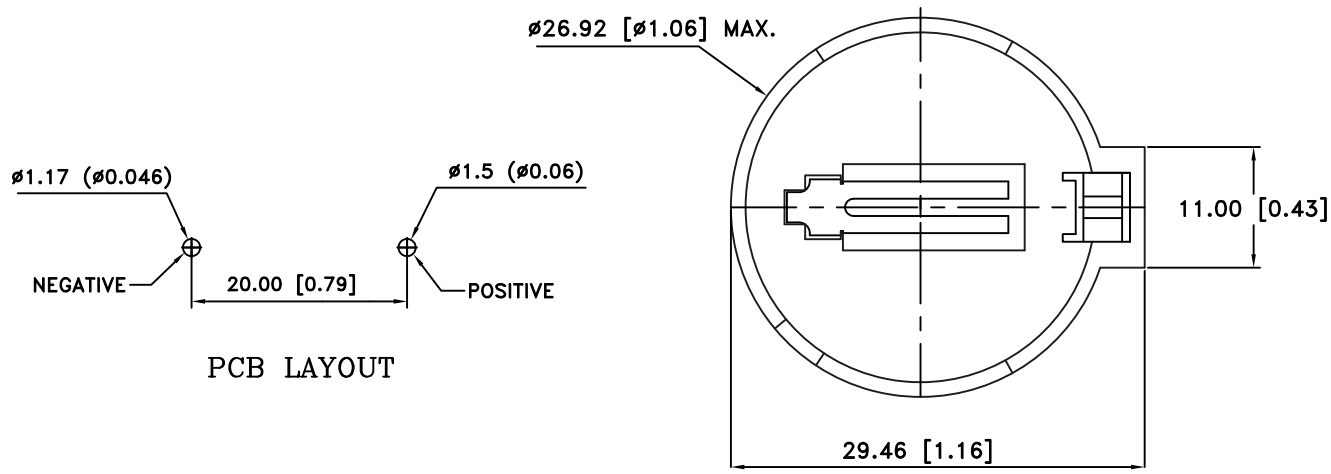

NOTES:  
MATERIAL:  
BODY: FR-NYLON WITH 15% GLASS FILLED,  
UL94V-0, UL FILE NO. E176060(S)  
CONTACT: PHOSPHOR BRONZE, NICKEL PLATED  
OVERALL  
APPLICATION FOR 3V LITHIUM BATTERY:  
INSULATOR RESISTANCE: 5000MEGA $\Omega$  MIN.  
OPPERATION TEMPERATURE: -55°C TO +105°C  
DURABILITY: 50 CYCLES MIN.  
CONTACT RESISTANCE: 30MILLI $\Omega$  MAX.  
ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5 (.020)$	Scale 4=1	Drawn By T.S. Approved By T.B.	
Fractional $\pm .8 (.030)$	Title BATTERY HOLDER FOR CR2450		
Angular $\pm 3^\circ$	Date 03/30/12	Drawing Number BS-2450	