

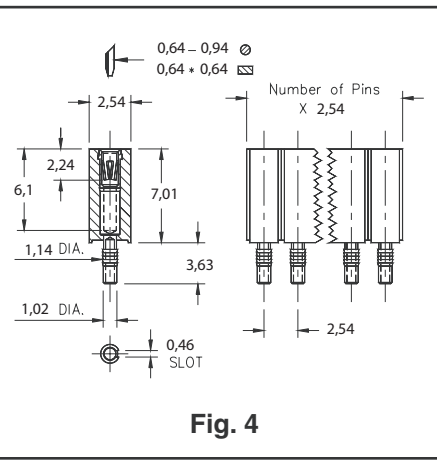
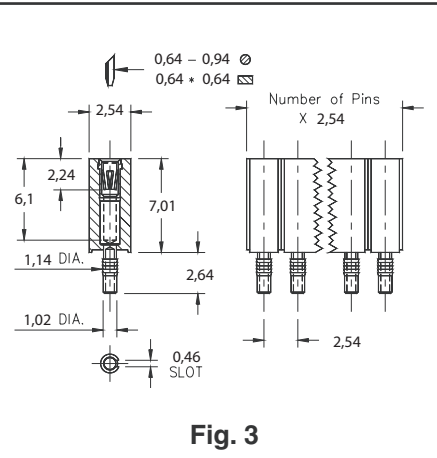


- The unique compliant tail pins conform to 1,02 ± 0,08 finished hole without stressing inner layers.
- Pin headers are offered in two tail lengths for 1,52-2,54 (MM# 5601) and 2,29 - 3,3 (MM# 5602) thick panels. (See page 178 for details)
- Sockets use Hi-Rel, six-finger clips which accept 0,76 dia. pins and also 0,64 square pins. (MM# 4614 or 4615). (See page 147 for details)

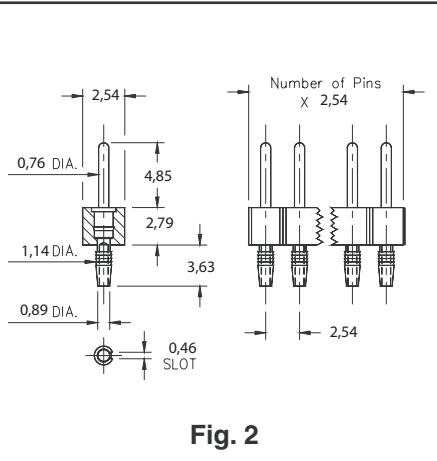

Ordering Information

Fig. 1	Compliant Tail Pin Header for 1,52 - 2,54 thick boards
	800-XX-0 __ -61-001000 Specify # of pins → 01-64
Fig. 2	Compliant Tail Pin Header for 2,29 - 3,3 thick boards
	800-XX-0 __ -62-001000 Specify # of pins → 01-64

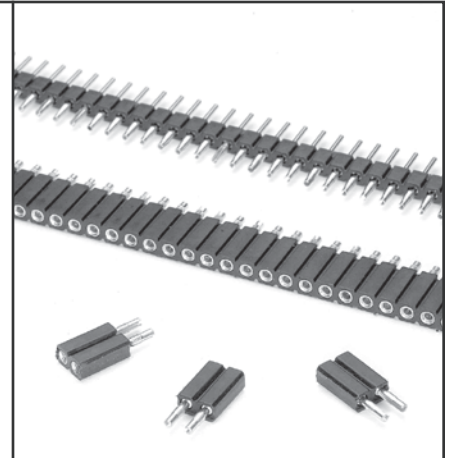

XX= Plating Code See Below

For RoHS compliance, select \diamond plating code. For the gold option (XX=10) also change part number from 800-XX-0XX-6X-001000 to 800-10-0XX-6X-001100

SPECIFY PLATING CODE XX=	10 \diamond	90	40 \diamond	
Pin Plating	0,25 μ m Au	5,08 μ m Sn/Pb	5,08 μ m Sn	

Fig. 3	Compliant Tail Socket for 1,52 - 2,54 thick boards
	801-XX-0 __ -61-001000 Specify # of pins → 01-50
Fig. 4	Compliant Tail Socket for 2,29 - 3,3 thick boards
	801-XX-0 __ -62-001000 Specify # of pins → 01-50



XX= Plating Code See Below

SPECIFY PLATING CODE XX=	13 \diamond	93	99		43 \diamond	44 \diamond
Sleeve (Pin)	0,25 μ m Au	5,08 μ m Sn/Pb	5,08 μ m Sn/Pb		5,08 μ m Sn	5,08 μ m Sn
Contact (Clip)	0,76 μ m Au	0,76 μ m Au	5,08 μ m Sn/Pb		0,76 μ m Au	5,08 μ m Sn