


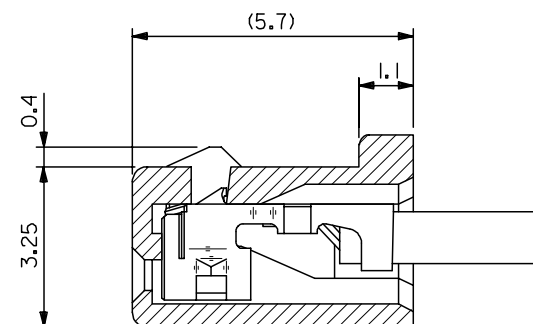

ターミナル装着状態図





FIGURE OF TERMINAL WHEN ASSEMBLED

32.9	32	28	5 1090-1500	15
30.9	30	26	-1400	14
28.9	28	24	-1300	13
26.9	26	22	-1200	12
24.9	24	20	-1100	11
22.9	22	18	-1000	10
20.9	20	16	-0900	9
18.9	18	14	-0800	8
16.9	16	12	-0700	7
14.9	14	10	-0600	6
12.9	12	8	-0500	5
10.9	10	6	-0400	4
8.9	8	4	-0300	3
6.9	6	2	5 1090-0200	2
C	B	A	ENG. NO.	* T CKT.

注 記 NOTES

1. 適合ターミナル: 50212-8*00, 50372-8*00, 59354-8***
APPLICABLE TERMINAL
2. 嵌合相手: 53324-***0, 53325-***0, 53358-***0, 501708-0801
MATES WITH
3. 材質: PBT, UL94V-0
MATERIAL: PBT, UL94V-0


REVISED EC NO: J2005-3025 DRAWN BY CHKD: APPR: AKANE SHIGE	2005/04/08 2005/04/08 2005/04/13	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			10 UNDER	± 0.2	DRAWN BY M. FUJIKURA	DATE '90/10/31	TITLE 2.0 W/B CONN REC HSG			
			10 OVER 30 UNDER	± 0.25	CHECKED BY H. HIRAMOTO	DATE '92/09/04				
			30 OVER	± 0.3	APPROVED BY M. FUKUSHIMA	DATE '92/09/04				
			ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-51090-**00		1 OF 1	
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

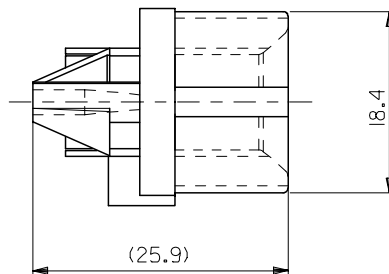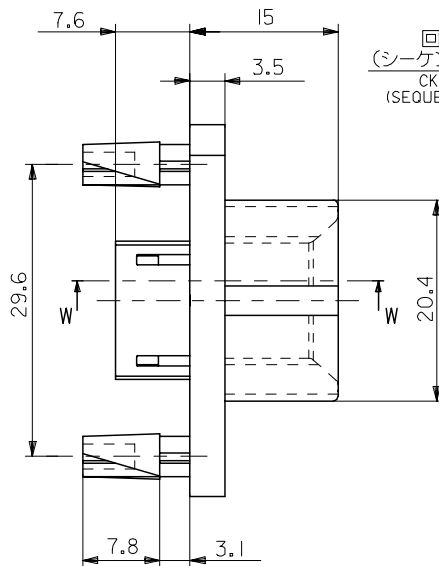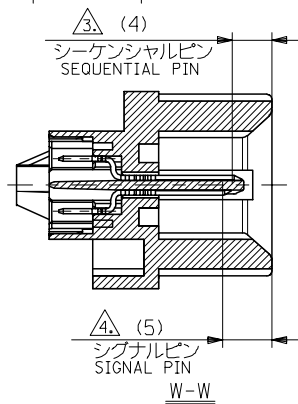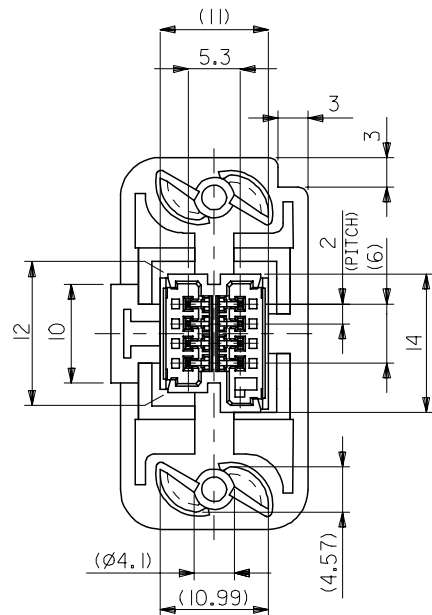

回路番号 1
(シーケンシャルピン)
CKTS. No. 1
(SEQUENTIAL PIN)

回路番号表示
CKTS. No. IDENTIFICATION

8. 本製品は 53717-**-11 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 53717-**-11.

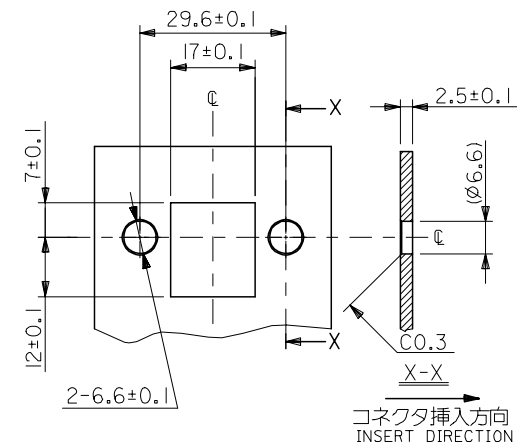

推奨モールドパネル加工寸法
PANEL CUT DIMENSIONS

注)
NOTES:

1. 材質
MATERIAL

ハウジング : ポリカーボネート UL94V-0 黒
HOUSING : POLYCARBONATE, UL94V-0, BLACK
ピン : 黄銅
PIN : BRASS

2. ピンメッキ仕様
PIN PLATING

金メッキ : 0.25µm MIN. (接点部)
GOLD : 0.25µm MIN. (CONTACT AREA)
鍍メッキ : 1.0µm MIN. (リセプタクル嵌合部)
TIN : 1.0µm MIN. (RECEPTACLE CONNECTED AREA)
ニッケルメッキ : 2µm MIN. (下地メッキ)
NICKEL : 2µm MIN. (UNDER PLATING)

適用極 : 1
APPLIES CKTS. No. : 1

適用極 : 2 ~ 8
APPLIES CKTS. No. : 2 ~ 8


5. 適合リセプタクル : 52484-**-10 / 51090-**-00
APPLICABLE RECEPTACLE : 52484-**-10 / 51090-**-00

6. 嵌合相手 : 52968-0819
MATES WITH : 52968-0819

7. フローティング量 : 全周 1.0mm
FLOATING DIM. : 1.0mm (CIRCUMFERENCE)

53717-0819	53717-**-19	8
MATERIAL NO.	MODEL NO.	CKT.

RELEASED EC NO: J2005-0842 DRAWN: MNABE1 CHKD: KTOJO APPR: NUKITA REV: 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY MNABE1	DATE '04/09/17	TITLE 2MM PITCH FLOATING CONN. PLUG HSG ASSY -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '04/09/17					
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE '04/09/17	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-53717-008		1 OF 2			
	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

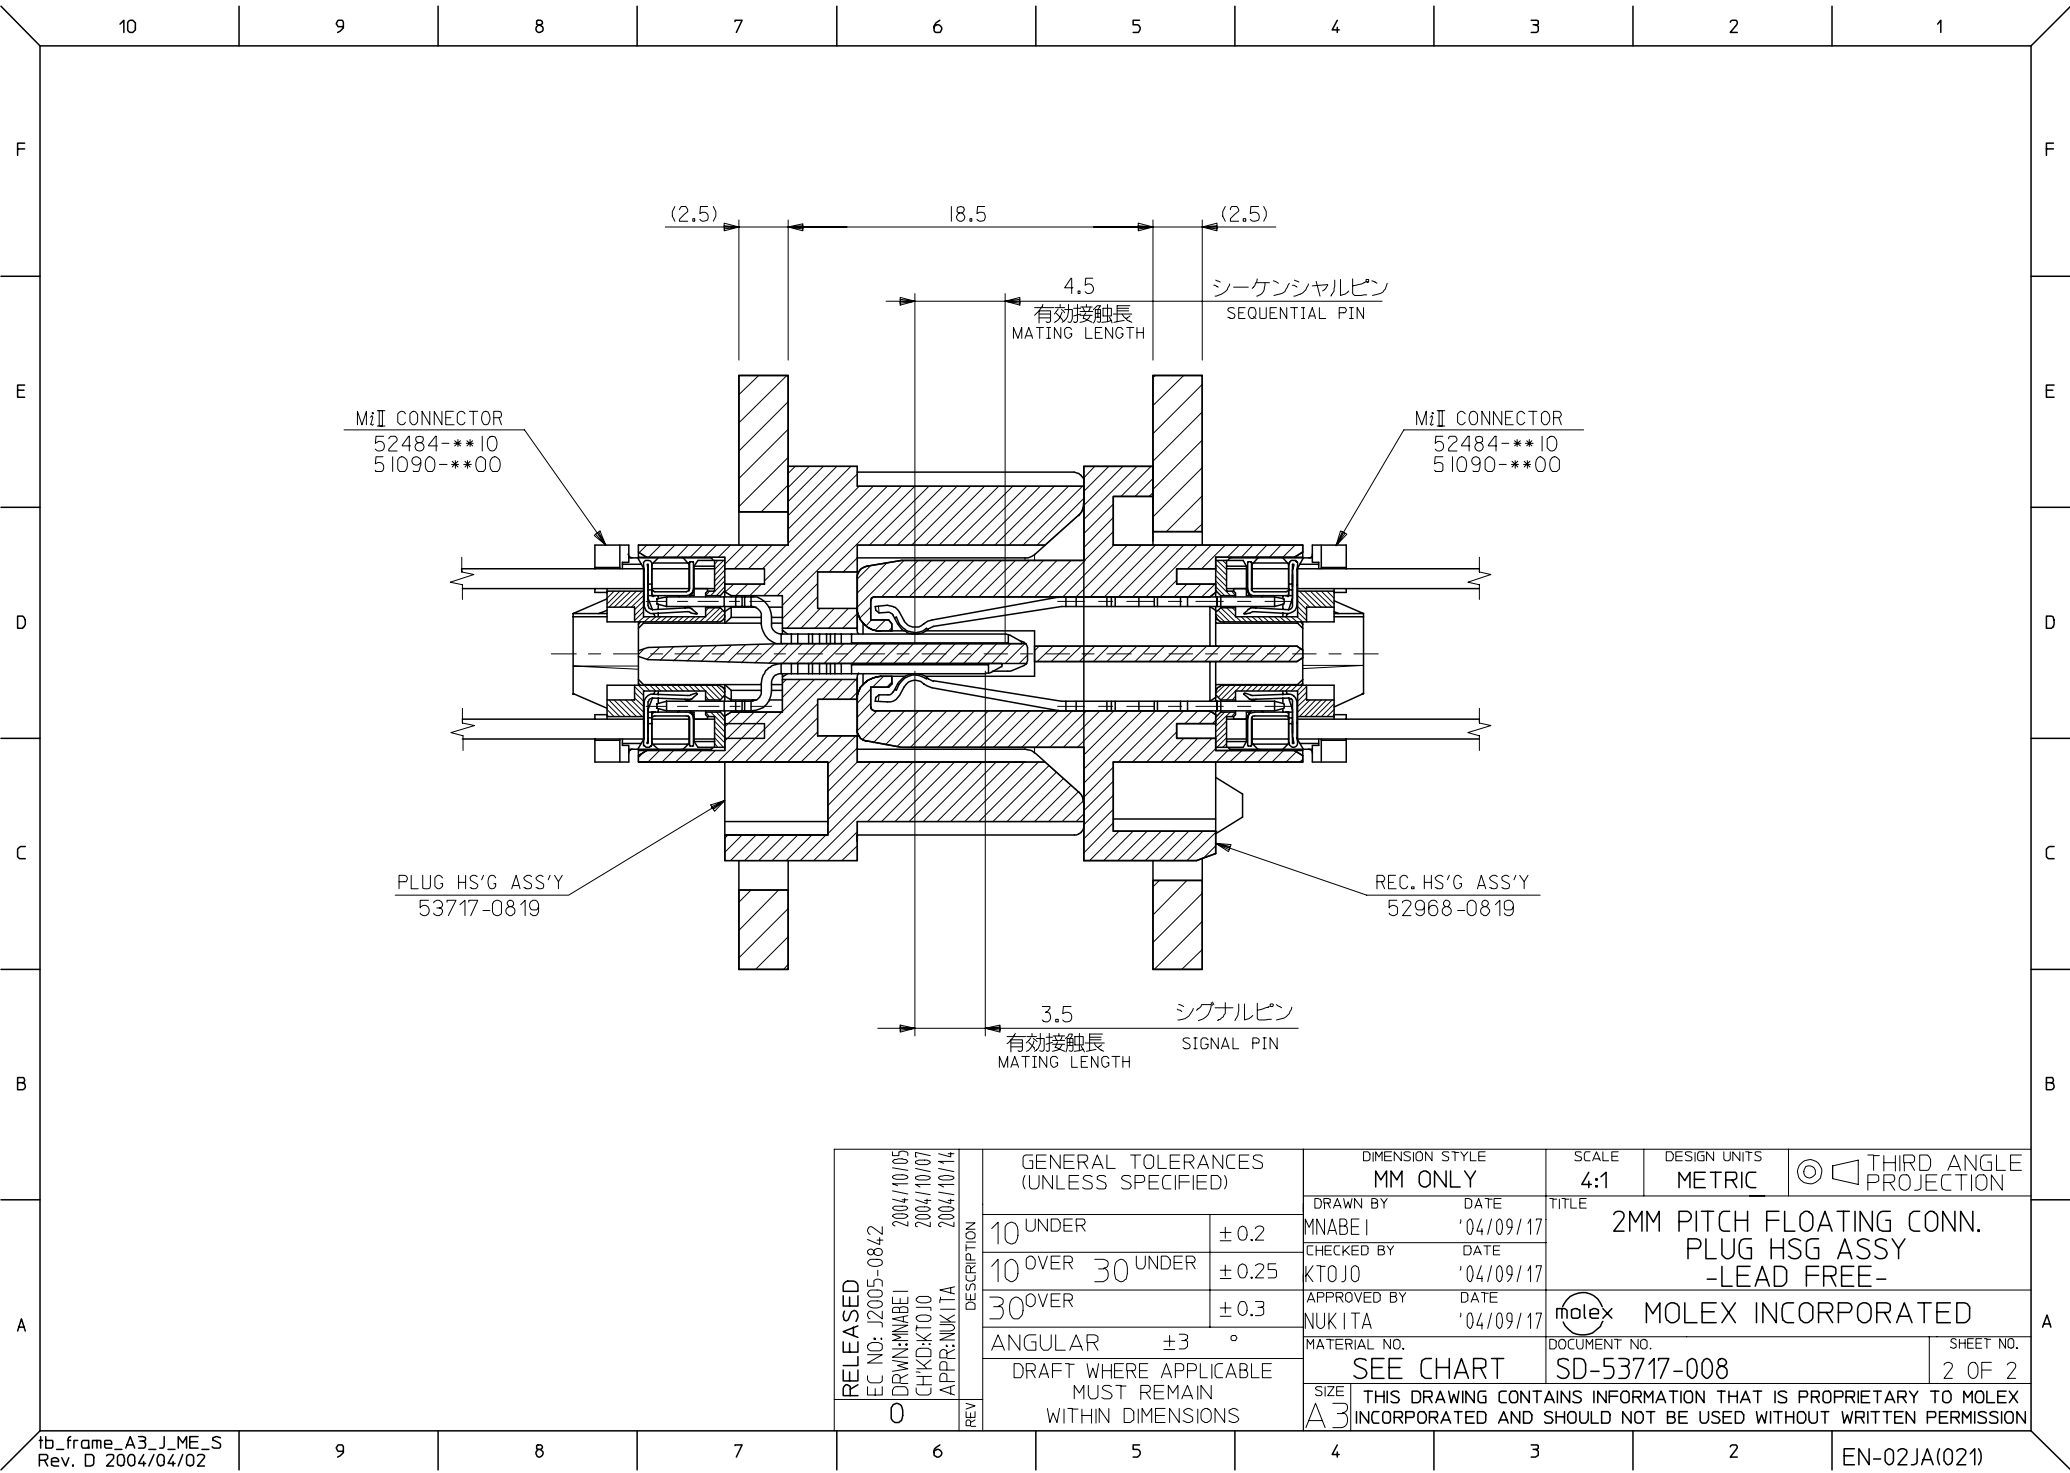

RELEASED EC NO: J2005-0842 O DRAWN: MNABE I CHKD: KTOJO APPR: NUKITA	2004/10/05 2004/10/07 2004/10/14	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			10 UNDER	± 0.2	DRAWN BY MNABE I	DATE '04/09/17	TITLE 2MM PITCH FLOATING CONN. PLUG HSG ASSY -LEAD FREE- MOLEX INCORPORATED			
			10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '04/09/17				
			30 OVER	± 0.3	APPROVED BY NUKITA	DATE '04/09/17				
			ANGULAR	± 3 °	MATERIAL NO.					DOCUMENT NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-53717-008			2 OF 2
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							