


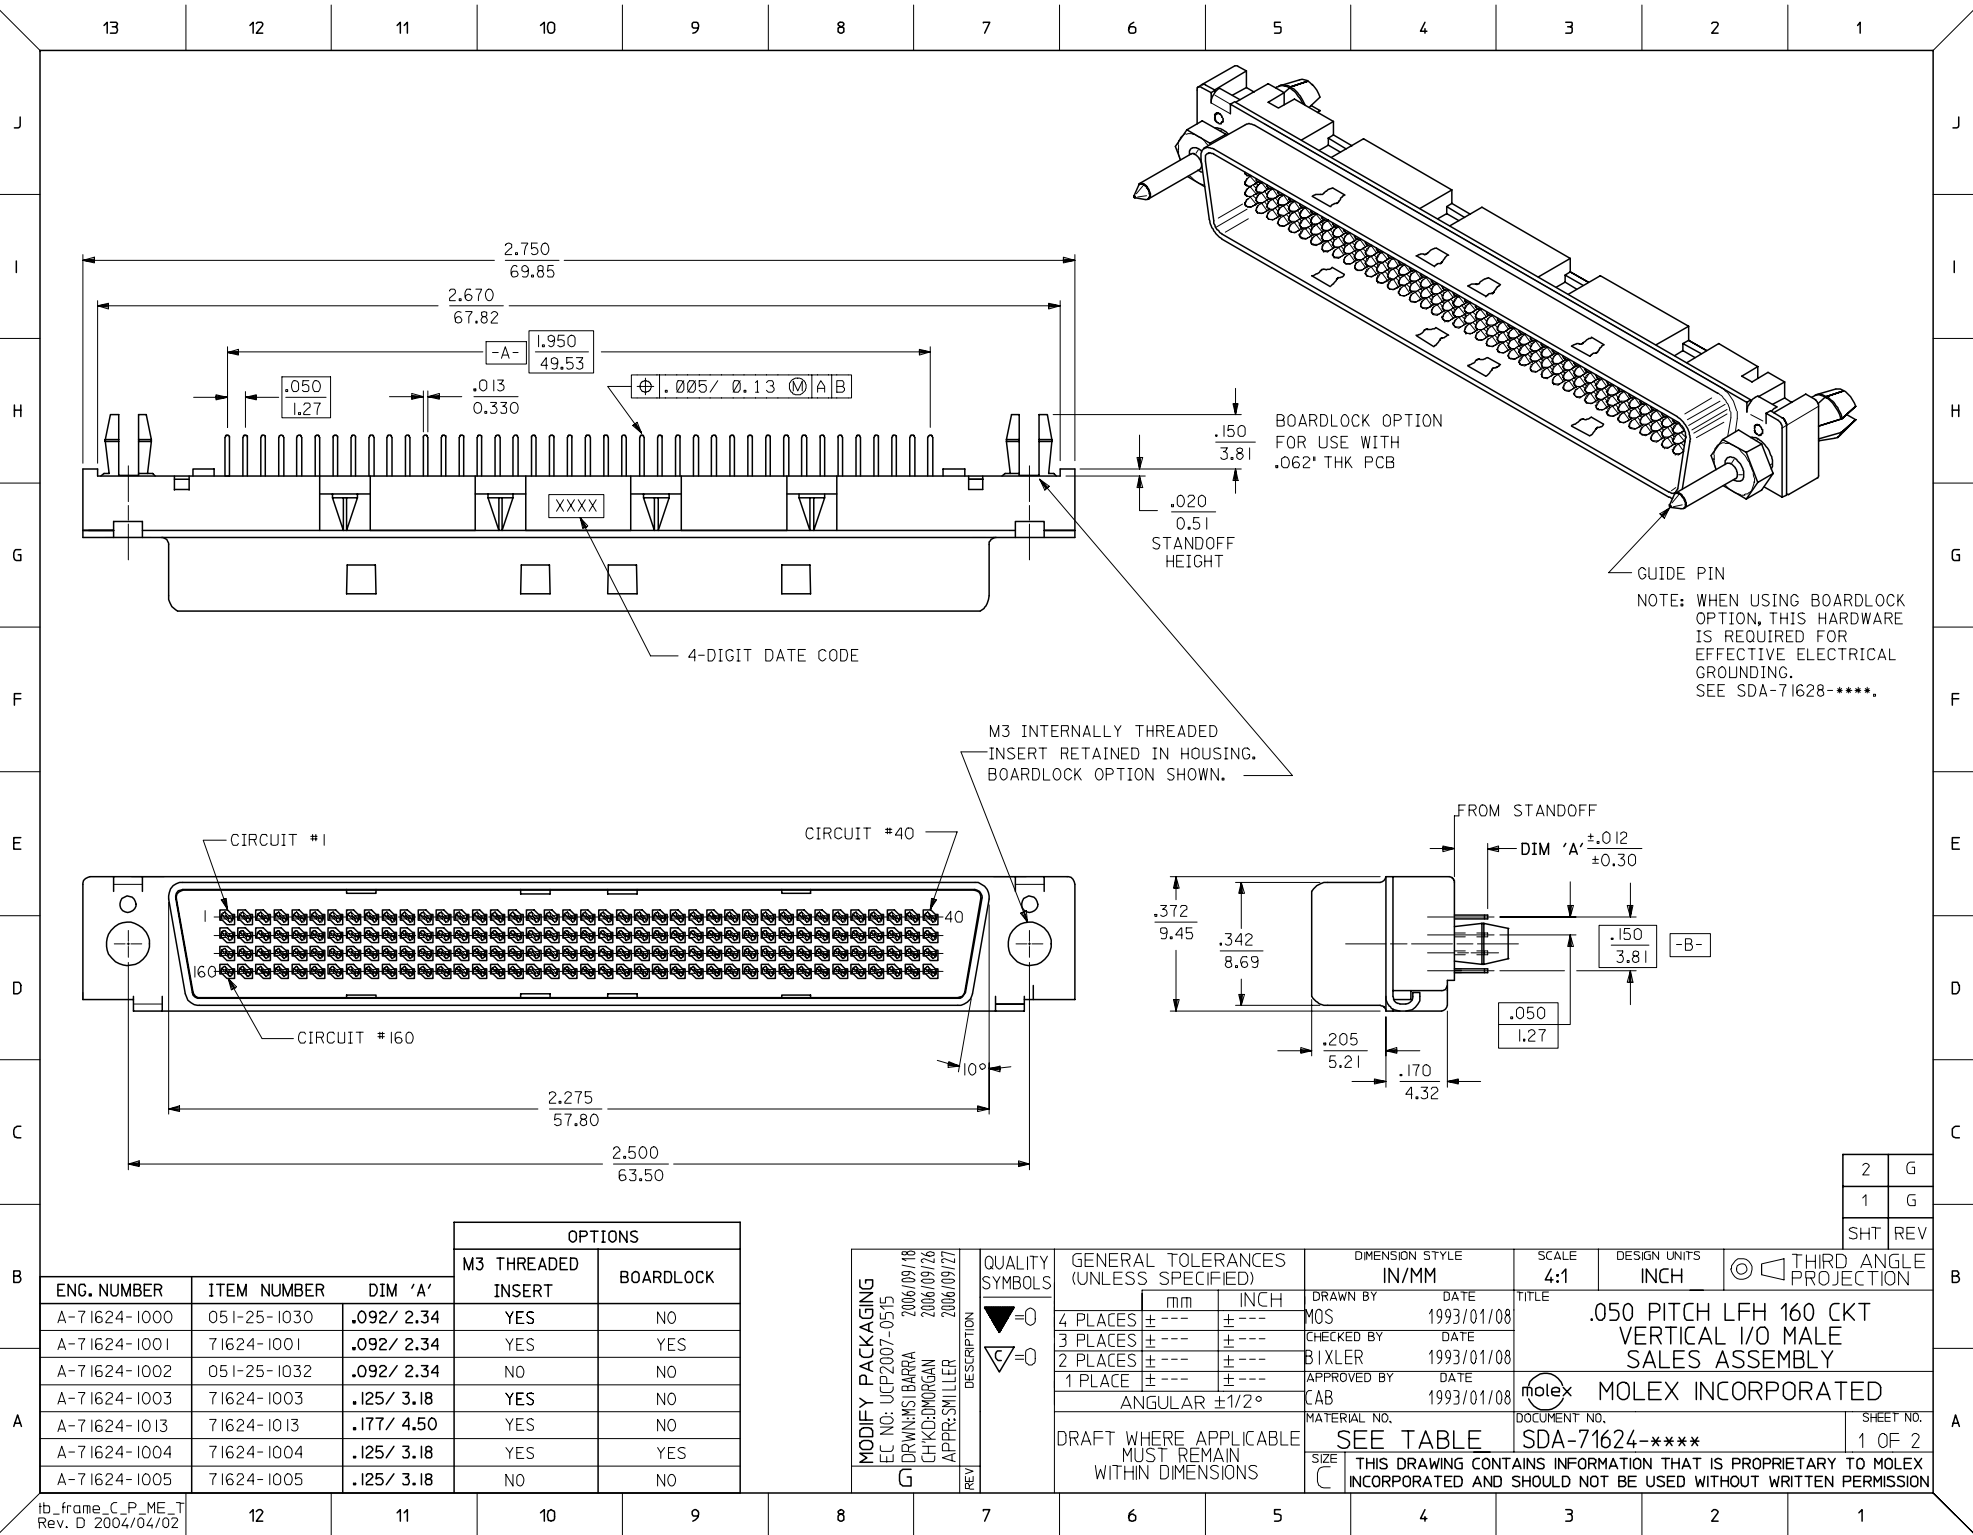

13 12 11 10 9 8 7 6 5 4 3 2 1

NOTES:

1) MATERIALS:

HOUSING: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL 94V-0, BLACK.
 MOLDED STICK: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL94V-0, BLACK.
 MALE CONTACT: PHOS. BRONZE .012±.0005 THICK.
 OUTER SHELL: LOW CARBON STEEL.
 THREADED BOARD LOCK: BRASS

2) PLATING :

TERMINAL: .000030/ 0.00076 MINIMUM GOLD IN SELECTIVE AREA;
 .000100/ 0.00254 MINIMUM TIN IN SELECTIVE AREA;
 OVER NICKEL UNDERPLATE OVERALL.

OUTER SHELL: .000100/ 0.00254 MINIMUM BRIGHT NICKEL
 OVER COPPER FLASH OPTIONAL.



BOARDLOCK: .000150-.000200/ 0.00381-0.00508 TIN
 OVER .000050/ 0.00127 MINIMUM NICKEL.

3) THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-71626.

4) PACKAGING SPECIFICATION PK-70873-297 APPLIES.

NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE
 LABELED 'COMPLIANT TO RoHS DIRECTIVE
 2002/95/EC AND ELV ANNEX II OF
 DIRECTIVE 2000/53/EC'. CARTONS
 WITHOUT THIS LABEL MAY CONTAIN
 PRODUCT WITH LEAD.

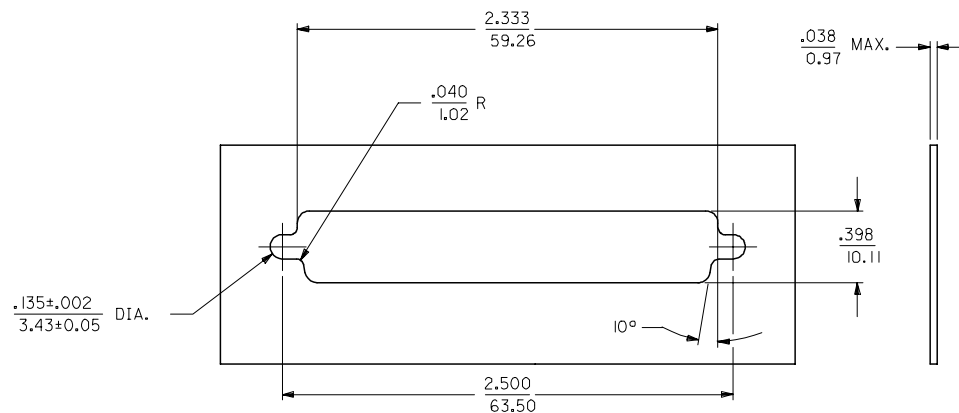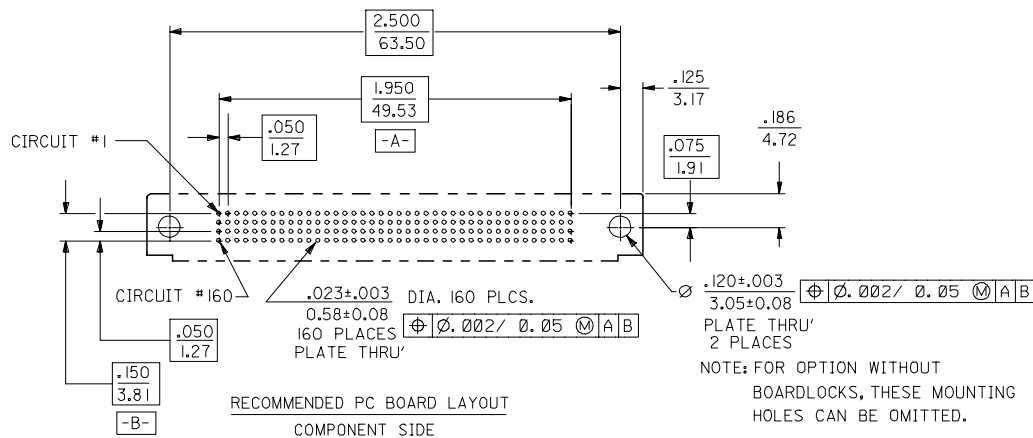

PANEL CUT-OUT DIMENSIONS

ALL TOLERANCES ±.003/ 0.08
 UNLESS OTHERWISE STATED.

MODIFY PACKAGING EC NO: UCP2007-0515 G DRW:MS/BARRA 2006/09/18 CHKD:DMORGAN 2006/09/26 APPR:SMILLER 2006/09/27	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE .050 PITCH LFH 160 CKT VERTICAL I/O MALE SALES ASSEMBLY MOLEX INCORPORATED SDA-71624-****			
			mm	INCH	DRAWN BY	DATE							
			4 PLACES	± ---	± ---	SCHMIDGALL	1993/01/08						
			3 PLACES	± ---	± ---	CHECKED BY	DATE						
			2 PLACES	± ---	± ---	BIXLER	1993/01/08						
			1 PLACE	± ---	± ---	APPROVED BY	DATE						
			ANGULAR ±1/2°		CAB	1993/01/08							
					MATERIAL NO.	DOCUMENT NO.	SHEET NO.						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		2 OF 2						
			REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									