



SMTSO-3.6-3ET

Penn Engineering

Buy Now



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

North America: Danboro, PA • E-mail: info@pemnet.com • Tel: +1-215-766-8853

Europe: Galway, Ireland • E-mail: europe@pemnet.com • Tel: +353-91-751714


Asia/Pacific: Singapore • E-mail: singapore@pemnet.com • Tel: +65-6-745-0660

Shanghai, China • E-mail: china@pemnet.com • Tel: +86-21-5868-3688

Part # SMTSO-3.6-3ET, ReelFast® Surface Mount Nuts and Spacers/Standoffs - Type SMTSO - Metric

Type SMTSO - ReelFast® surface mount nuts and standoffs are available threaded and unthreaded.

Packaged on 330 mm recyclable reels. Tape width is 24 mm. Supplied with polyimide patch for vacuum pick up. Reels conform to EIA-481.

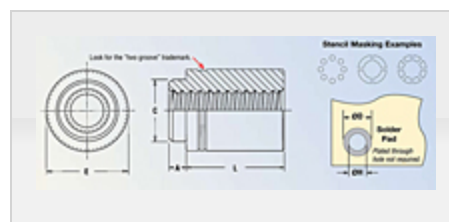

Specifications

Thru-Hole + 0.10-0.08 3.6 mm

Thru-Hole Code 3.6

Length Code 3

L - Length ± 0.13

3 mm



Min. Sheet Thickness 1.53 mm

A Max. 1.53 mm

C Max. 5.28 mm

E ± 0.13 7.14 mm

ØH - Hole Size in Sheet + 0.08	5.41 mm
ØD - Min. Solder Pad	7.77 mm
Parts per Reel	1000
Pitch	12 mm
For Use in Sheet Hardness¹	Not Applicable
Thread Specification	Internal, ASME B1.13M, 6H
Fastener Material	Carbon Steel
Standard Finish	Electro-Plated Tin, ASTM B545, Class A with Clear Preservative Coating, Annealed
CAD Supplier	PennEngineering® (PEM®)

¹ HRB - Hardness Rockwell “B” Scale. HB - Hardness Brinell.