


► General data

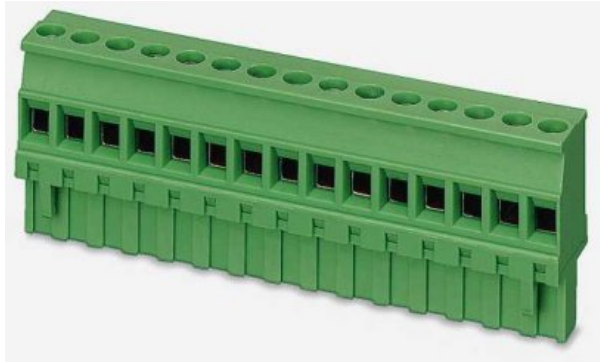

Plug component, nominal current: 12 A, rated voltage: 250 V, pitch: 5.08 mm, no. of positions: 9, type of connection: Screw connection

Order number	1792317
Type	MVSTBR 2,5/ 9-ST-5,08

Barcode number	4017918044794
Unit pack	50 Piece
Customs tariff	85369010000

► Technical data

Dimensions / positions

Pitch	5.08 mm
Dimension a	40.64 mm
Number of positions	9
Screw thread	M 3
Tightening torque	0.5 Nm

Technical data

Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Nominal voltage U_N	250 V
Nominal cross section	2.5 mm ²
Maximum load current	12 A (with 2.5 mm ² conductor cross section)
Insulating material	PA
Inflammability class acc. to UL 94	V0
Internal cylindrical gage	A 3
Stripping length	7 mm

Connection data

Min. conductor cross section, rigid	0.2 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Max. conductor cross section, flexible	2.5 mm ²
Min. conductor cross section, flexible, with ferrule with plastic sleeve	0.25 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.25 mm ²
Max. conductor cross section, flexible, with ferrule with plastic sleeve	2.5 mm ²
Min. conductor cross section AWG/kcmil	24
Conductor cross section AWG/kcmil max	12
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	1 mm ²
2 conductors of the same cross section, flexible, min.	0.2 mm ²
2 conductors with same cross section, flexible max.	1.5 mm ²
2 conductors of the same cross section, flexible, with AEH without plastic sleeve, min.	0.25 mm ²
2 conductors with identical cross section, flexible with AEH with plastic sleeve max.	1 mm ²
2 conductors of the same cross section, flexible, with TWIN-AEH with plastic sleeve, min.	0.5 mm ²
2 conductors with identical cross section, flexible with TWIN-AEH with plastic sleeve max.	1.5 mm ²

► Certificates

CSA


Comments	all numbers of positions are accepted
Nominal voltage U_N	300 V
Nominal current I_N	10 A
AWG/kcmil	28-12

UL

Comments	all numbers of positions are accepted
Nominal voltage U_N	300 V
Nominal current I_N	10 A
AWG/kcmil	30-12

▶ Drawings

Dimensioned drawing



Approval logo



► Additional products

General

1880371	EMSTBA 2,5/ 9-G-5,08
1859580	EMSTBVA 2,5/ 9-G-5,08
1873427	FKIC 2,5/ 9-ST-5,08
1823914	ICC 2,5/ 9-STZ-5,08
1762444	MDSTB 2,5/ 9-G1-5,08
1842131	MDSTBA 2,5/ 9-G-5,08
1762570	MDSTBV 2,5/ 9-G1-5,08
1845400	MDSTBVA 2,5/ 9-G-5,08
1770782	MSTB 2,5/ 9-G-5,08-LA
1757310	MSTBA 2,5/ 9-G-5,08
1768011	MSTBA 2,5/ 9-G-5,08-LA
1788790	MSTBVK 2,5/ 9-G-5,08
1788606	MVSTBU 2,5/ 9-GB-5,08
1769531	SMSTB 2,5/ 9-G-5,08
1767449	SMSTBA 2,5/ 9-G-5,08
3002076	UK 3-MVSTB-5,08
3002102	UK 3-MVSTB-5,08-LA 24RD
3002063	UK 3-MVSTB-5,08/EK
3002131	UK 3D-MSTBV-5,08
3002144	UK 3D-MSTBV-5,08-LA 24RD
3002173	UK 3D-MSTBV-5,08/EK
1788185	UMSTBVK 2,5/ 9-G-5,08
1873016	ZFKK 1,5-MSTBV-5,08

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel + 49 - (0) 52 35 - 3-00
Fax + 49 - (0) 52 35 - 3-4 12 00
www.phoenixcontact.com

© Phoenix Contact
Technical modifications reserved