


Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

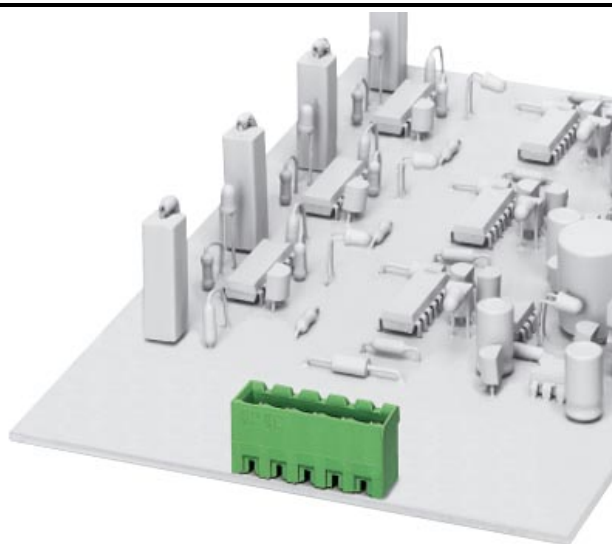

Header, nominal current: 12 A, rated voltage: 250 V,
pitch: 5.08 mm, no. of positions: 3, mounting:
Soldering

The illustration shows version MSTBVA 2,5/ 5-G-5,08 AU

Order No.	1719138
Ord designation	MSTBVA 2,5/ 3-G-5,08 ABGY AU
EAN	4017918348915
Pack	50 Pcs.
Customs tariff	85369010
Weight/Piece	0,00141 KG

► Product notes

WEEE/RoHS-compliant since: 01/01/2003



IMPORTANT : This date is valid for Customers in Germany only. Date Format is MM/DD/YYYY.
Please contact your local in-country Phoenix Contact location or designated business partner for a Logistics Compliant date in your area.
In order to guarantee delivery of RoHS-Compliant product, please purchase Phoenix Contact parts from authorized Phoenix Contact representatives and distributors.

► Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;