


INDUCTORS AND COMMON MODE CHOKES

For Use in ADSL POTS Low Pass Filters

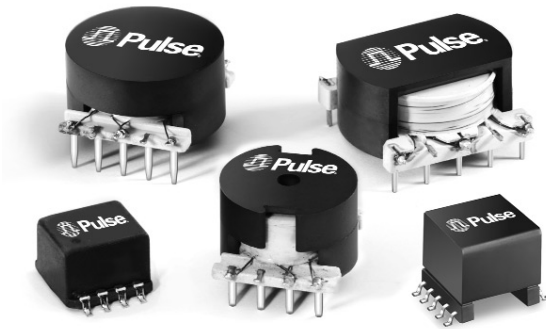

-  Excellent longitudinal balance
-  Inductors also available in surface mount packages
-  Customized inductance values available
-  Inductance is stable within $\pm 10\%$ with DC current from 0 to 100 mA

Electrical Specifications @ 25°C — Operating Temperature -40°C to 85°C

Part Number	Inductance (each winding) (mH)	DC Resistance (each winding) (Ω MAX)	Isolation Voltage (between windings) (Vrms)	Function	Mounting
B2005	9.0 $\pm 30\%$ ¹	0.60	1500	Common Mode Choke	THT
B2013 ³	9.0 $\pm 30\%$ ¹	1.00	1500	Common Mode Choke	SMT
B2023	6.0 $\pm 5\%$ ²	4.00	1500	Coupled Inductor for POTS Low Pass Filter	THT
B2024	4.0 $\pm 5\%$ ²	3.00	1500	Coupled Inductor for POTS Low Pass Filter	THT
B2025	3.0 $\pm 5\%$ ²	2.50	1500	Coupled Inductor for POTS Low Pass Filter	THT
B2026	10.0 $\pm 5\%$ ²	4.50	1500	Coupled Inductor for POTS Low Pass Filter	THT
B2086 ³	4.0 $\pm 10\%$	3.60	1250	Coupled Inductor for POTS Low Pass Filter	SMT
B2113	2.25 $\pm 10\%$	2.25	500	Coupled Inductor for POTS Low Pass Filter	THT
B2114	1.425 $\pm 10\%$	2.25	500	Coupled Inductor for POTS Low Pass Filter	THT
B2116	1.65 $\pm 10\%$	2.25	500	Coupled Inductor for POTS Low Pass Filter	THT
B2117	1.35 $\pm 10\%$	2.25	500	Coupled Inductor for POTS Low Pass Filter	THT
B2118	0.8 $\pm 10\%$	2.00	500	Coupled Inductor for POTS Low Pass Filter	THT
B8098 ³	4.0 $\pm 10\%$	3.60	1250	Coupled Inductor for POTS Low Pass Filter	SMT


¹ 100 KHz, 20 mVrms ² 1.0 KHz, 1.0 mVrms, 0 mA to 100 mA (each winding). ³ For Tape & Reel packaging, add the suffix "T" to this part number (B2013T)

Note: The B2005 and B2013 are common mode chokes that reduce common mode voltages in the low frequency range that may be caused by telephone ringing signals or by interference from radio transmitters in the ADSL frequency range. The chokes are also designed to accommodate DC currents up to 100 mA.

Mechanical

Schematic

B2024/B2025/B2113/B2114/B2116/B2117

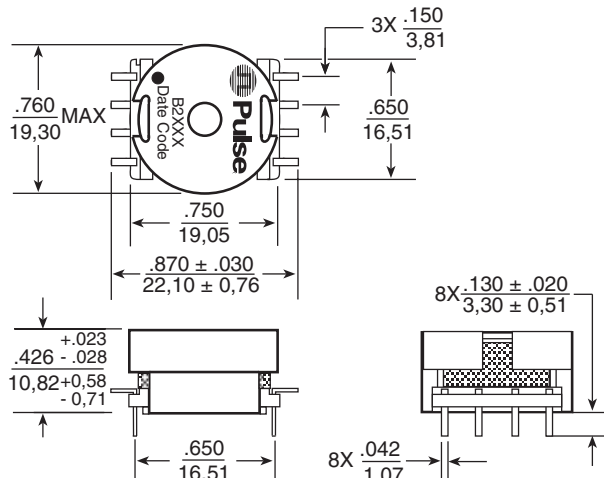

Weight 9.5 grams
Tray30/tray

Dimensions: Inches
mm
Unless otherwise specified, all tolerances are $\pm .010$
 $\pm .025$

INDUCTORS AND COMMON MODE CHOKES


For Use in ADSL POTS Low Pass Filters



Mechanicals

Schematics


B2118

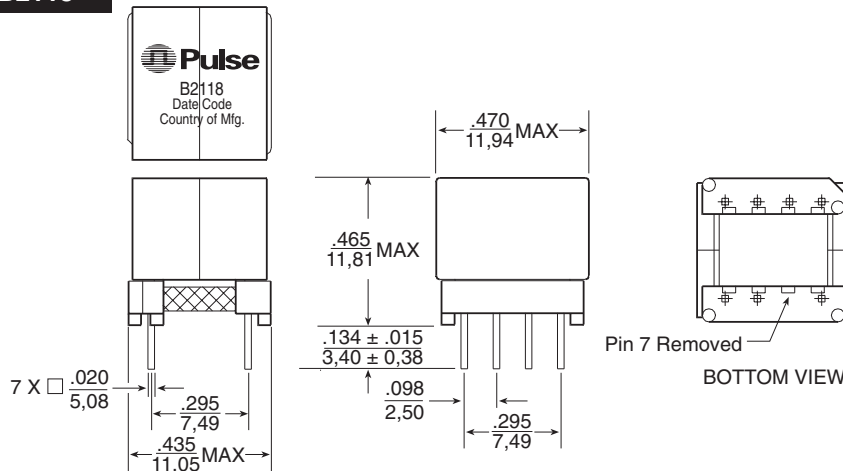

Weight3.6 grams
Tray75/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$



B2023

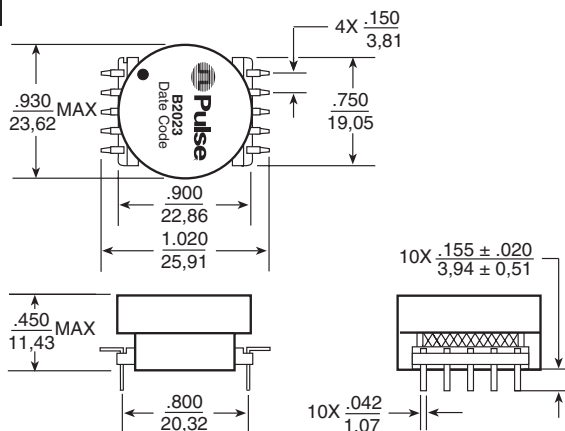

Weight15.0 grams
Tray45/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$

B2026

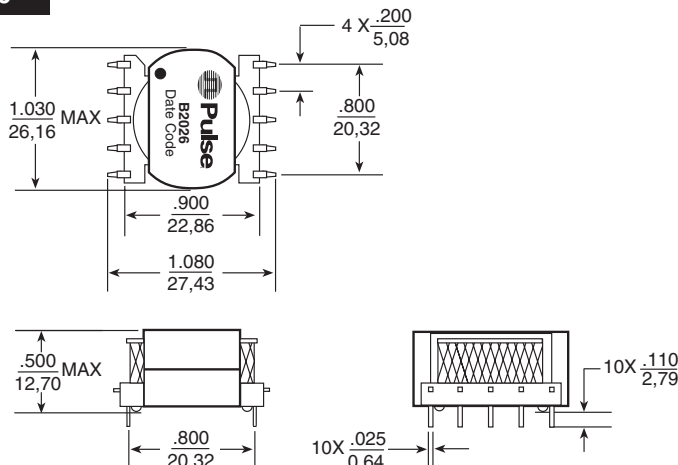

Weight17.5 grams
Tray25/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$

INDUCTORS AND COMMON MODE CHOKES




For Use in ADSL POTS Low Pass Filters



Mechanicals

Schematics



B2086/B8098

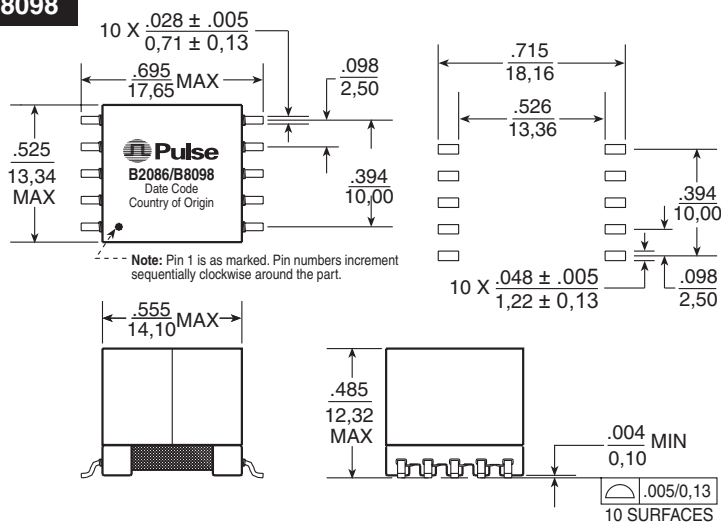

Weight 6.2 grams
Tape & Reel 150/reel
Tray 60/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$



B2005

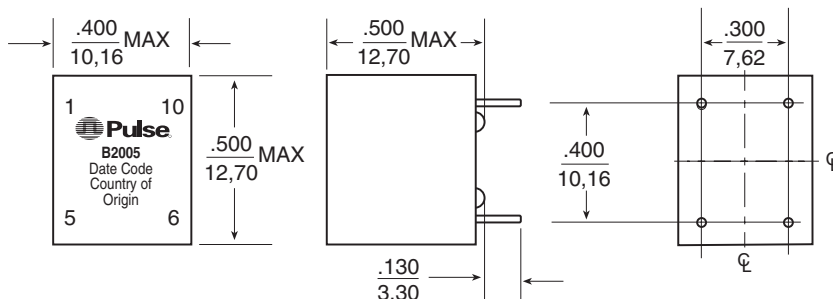

Weight 3.7 grams
Tube 40/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$

B2013

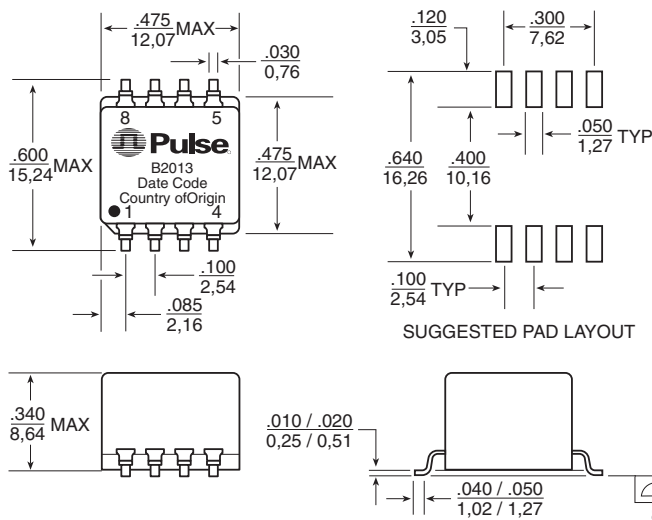

Weight 2.5 grams
Tape & Reel 250/reel
Tube 40/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$

INDUCTORS AND COMMON MODE CHOKES



For Use in ADSL POTS Low Pass Filters

Performance Description

The series of coupled inductors shown on this data sheet are ideal for use in Asymmetrical Digital Subscriber Line (ADSL) applications where a low pass filter is required to separate the voice frequencies from the data frequencies that are carried on an ADSL line. In spite of their small footprint and low profile, these coupled inductors provide excellent electrical performance. They have stable inductance with varying DC


current and temperature, high self-resonant frequency, low coupling capacitance, and excellent balance.

The common mode chokes were developed to reduce common mode voltages in the low frequency range that is used for voice transmission. The chokes are also designed to accommodate DC currents up to 100 mA.


Application Circuit

The following schematic depicts a typical LC filter that incorporates the use of a common mode choke in addition to the LC network. As shown in the frequency response graph below, at low frequencies, the amplitude of the output signal is roughly equal to the amplitude of the input signal. At higher

frequencies the amplitude of the output decreases. Thus, the network passes low frequency voice signals with only a small degree of attenuation, while it suppresses high frequency signals and acts as a low pass filter.

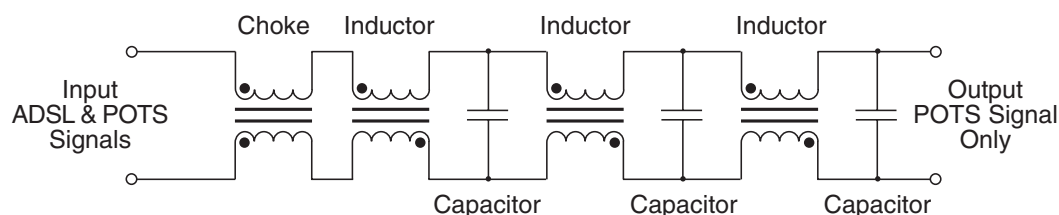

Frequency Response

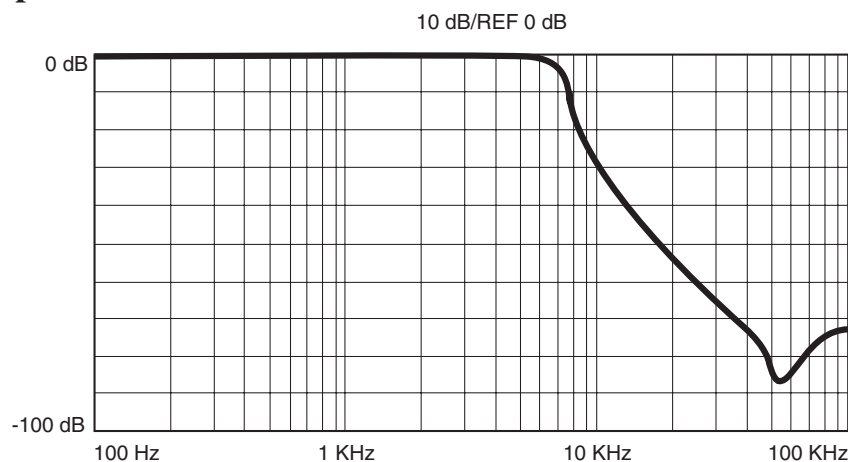

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	19/F, China United Plaza 1008 Tai Nan West Street Cheung Sha Wan, Kowloon Hong Kong, China TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners.

Find price and stock options from leading distributors for B2005 on Findchips.com:

<https://findchips.com/search/B2005>

Find CAD models and details for this part:

<https://findchips.com/detail/b2005/Pulse-Engineering-Inc>