

NEW PRODUCT PROPOSAL

BX4190LNL





 **VDSL Transformer**

 **Design to meet EN60950 Functional Insulation 250 Vrms**

<i>Electrical Specification @ 25°C – Operating Temperature -40°C To +85°C</i>							
Turns Ratio (8-5): (1-4) (+/-2%)	OCL (8-5) (uH, +/-10%)	LL (8-5) with (1-4) shorted uH Max	DCR (8-5) (OHM, Max)	DCR (1-4) (OHM, Max)	C _{ww} (1,4) to (8-5) (pF Max)	HIPOT (VAC, 1 Minute)	THD @100KHz, 2Vrms (dB Min)
1.86	100	0.7	0.75	0.4	35.0	1500	-75.0

Mechanical

Schematic

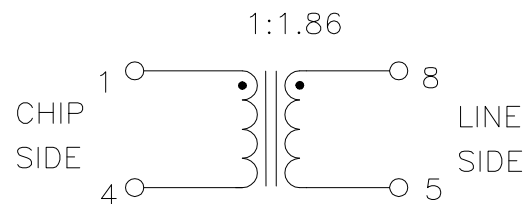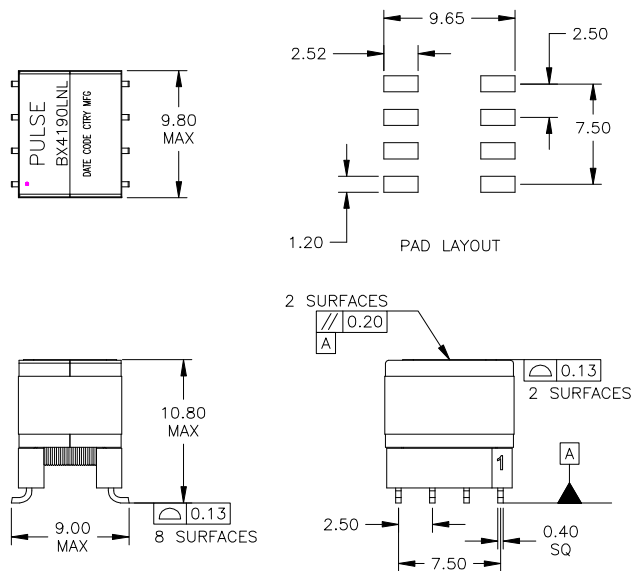

Dimensions: mm, unless otherwise specified tolerance = ± 0.1

Add suffix "T" for T&R Packaging

Quantity in Tray:

Quantity in T&R:

For More Information:

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
Fax: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road,
The Surrey Research Park,
Guildford, Surrey GU2 5RE,
United Kingdom
TEL: +44 1483 401700
Fax: +44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
Fax: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
Fax: 65 6280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
His-Chih, Taipei Hsien
Taiwan, R.O.C.
TEL: 886 2 2698 0228
Fax: 886 2 2698 0948

HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang
Shatin Warehouse Centre
6 Wong Chuk Yeung Street
Fotan, Shatin, Hong Kong
TEL: 852 2788 6588
Fax: 852 2776 1055