





Carbon Composition Resistors

Dimensions

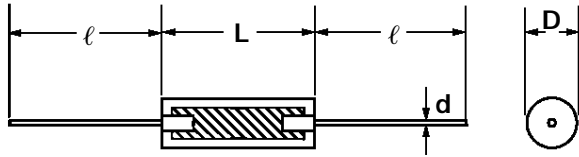

Derating Curve

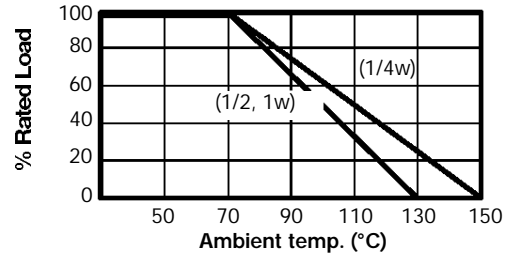

Ratings and Dimensions

| Type | Rated Power (W) | Dimensions in mm | | | | Max. Rated Voltage (v) | Max. Overload Voltage (v) | Resistance range() | Resistance Tolerance (%) |
|---------|-----------------|-------------------------------------|---------|--------|---------------|------------------------|---------------------------|---------------------|--------------------------|
| | | L | D | l | d | | | | |
| RC1/4G | 0.25 | 6.3±0.7 | 2.4±0.1 | 30±3.0 | ±0.6 0.02 | 250 | 400 | 2.2Ω 22MΩ | ±5/±10 |
| RC1/2G | 0.5 | 9.5 ^{+0.8} _{-0.7} | 3.6±0.2 | 25±1.0 | ±0.7 0.02 | 350 | 700 | 2.2Ω 22MΩ | ±5/±10 |
| *RC100G | 1 | 14.3±0.7 | 5.7±0.3 | 30±3.0 | ±0.92 0.02 | 500 | 1000 | 2.2Ω 22MΩ | ±10 |

*Detail 1W Carbon Composition Specifications on Page K32.


Specification Limit and Performance

Test procedures, sequence of test, etc., refer to MIL-STD 202D and JIS-C-5202.

Mechanical Characteristics

| Spec. & Performance Items | | MIL - R - 11F SPEC.LIMIT | | Spec. Limit | | Performance | |
|------------------------------|--------------------------------------|---|---------------|-----------------------------|--------------|-------------|-------|
| | | RC07 | RC20 | RC1/4 | RC1/2 | RC1/4 | RC1/2 |
| | | Terminal strength | Pull | 2.27kg | | 1kg | 2.5kg |
| Bending | No damage, ± (1% + 0.05) | | No damage | | | | |
| Vibration | Twist No damage ± (1% + 0.05) | High frequency no damage, ± (2% + 0.05) | | No damage ± (1% + 0.05) | | ± 0.5% | |
| | | 350°C | | 300°C | 350°C | ± 1.5% | |
| Resistance to soldering heat | ± (3% + 0.05) | | ± 3% | | 95% and over | | |
| | 232°C, 3 sec. | | 230°C, 3 sec. | | 75% and over | | |
| Solderability | 95% and over | | 75% and over | | 95% and over | | |

Part Numbering System

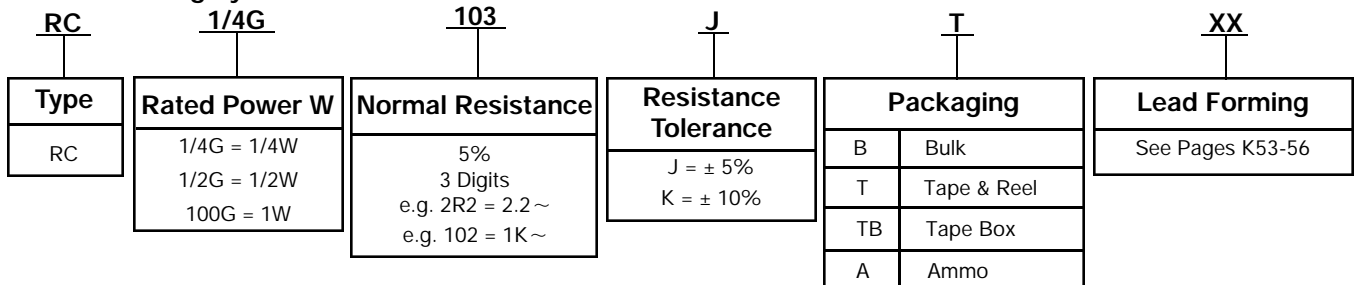

Carbon Composition Resistors



Electrical Characteristics

| Spec. & Performance Items | | MIL-R-11F SPEC-LIMIT | | Spec. Limit | | Performance | |
|--|--------------|--------------------------|--------------|--------------|---------------|--------------------|--------------------------|
| | | | | RC07 | RC20 | RC _{1/4} | RC _{1/2} |
| | | | | at -55°C (%) | at -105°C (%) | at -55°C (%) | at 100°C (%) |
| Resistance temperature characteristics | R range | | | | | | |
| | 1k and under | ± 6.5 | ± 5 | + 6.5 to 0 | + 1 to -5 | +3.5 to +4.5 | -3.0 to -4.0 |
| | 1.1k to 10k | ± 10 | ± 6 | + 10 to 0 | 0 to -6 | +4.5 to +5.5 | -4.0 to -5.0 |
| | 11k to 100k | ± 13 | ± 7.5 | + 13 to 0 | 0 to -7.5 | +9.0 to +10 | -5.0 to -6.0 |
| | 110k to 1M | ± 15 | ± 10 | + 15 to 0 | 0 to -10 | +10 to +11 | -6.0 to -7.0 |
| | 1.1M to 10M | ± 20 | ± 15 | + 20 to 0 | 0 to -10 | | |
| 11M and over | ± 25 | | | + 20 to 0 | 0 to -15 | | |
| Voltage coefficient | | ± 0.035 % / v | ± 0.02 % / v | ± 0.05 % / v | ± 0.035 % / v | - 0.02 % and under | |
| Short time overload | | ± 2.5% | | | | ± 0.7% | ± 0.5% |
| Insulation resistance | | 100V | 500V | 100V | 500V | 10,000M and over | |
| | | 1,000M and over | | | | | |
| Dielectric withstanding voltage | | 325V | 450V | 300V | 500V | 700V | No breakdown & No damage |
| | | No breakdown & No damage | | | | | |

Environmental Characteristics

| Spec. & Performance Items | | MIL-R-11F SPEC-LIMIT | | Spec. Limit | | Performance | |
|------------------------------|--|-------------------------|--|-------------|------|-------------------|-------------------|
| | | | | RC07 | RC20 | RC _{1/4} | RC _{1/2} |
| | | | | | | | |
| Temperature cycling | | ± 4% | | ± 2% | | ± 0.5% | |
| Humidity (Steady state) | | | | ± 3% | | ± 1.0% | |
| Damp heat (Long term) | | X 10% Max.15% | | ± 5% | ± 8% | ± 1.0% | |
| Load life | | X 6% Max.10% | | ± 6% | ± 8% | ± 3.0% | |

Reliability Test (Damp Heat)

Samples: RC_{1/4}, RC_{1/2} 100 , 1k , 10K , 100k , J, n = 150PCS. Each Total 2,400PCS.

Condition: 5,000 Hrs. operating at interval rated load at 40°C, 95%RH.


| Failure rate level determination (%) | | P/P _N (%) | Component hour T (Hrs) | Number of failure r (P.C.S.) | Failure rate (% / 1,000Hr) | | MTTF _{CL} (60%) (Hrs) |
|--------------------------------------|------|----------------------|-------------------------|------------------------------|----------------------------|-----------------------|--------------------------------|
| | | | | | λ | λ _{CL} (60%) | |
| R/R | ± 5 | 0 | 2.984 x 10 ⁵ | 6 | 0.201 | 0.244 | 4.098 x 10 ⁵ |
| | | 20 | 2.990 x 10 ⁵ | 4 | 0.134 | 0.176 | 5.682 x 10 ⁵ |
| | | 60 | 2.997 x 10 ⁵ | 2 | 0.067 | 0.104 | 9.615 x 10 ⁵ |
| | | 100 | 2.992 x 10 ⁵ | 3 | 0.100 | 0.139 | 7.194 x 10 ⁵ |
| | | Total | 1.196 x 10 ⁷ | 15 | 0.125 | 0.138 | 7.209 x 10 ⁵ |
| | ± 10 | Total | 1.20 x 10 ⁷ | 0 | 0.0055 | 0.0077 | 1.299 x 10 ⁷ |





Carbon Composition Resistors

Typical Characteristics (Average value) Pulse Characteristic


2000PF discharge pulse, 100 times

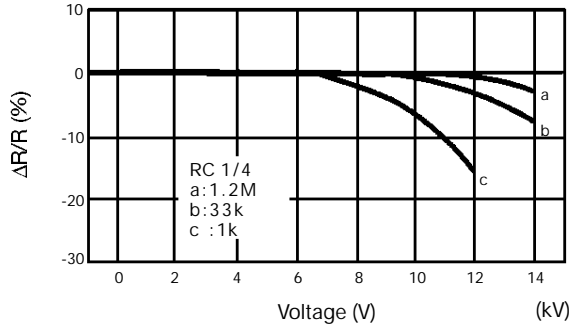


Current Noise

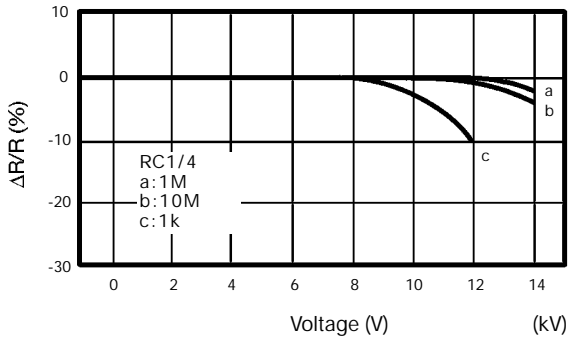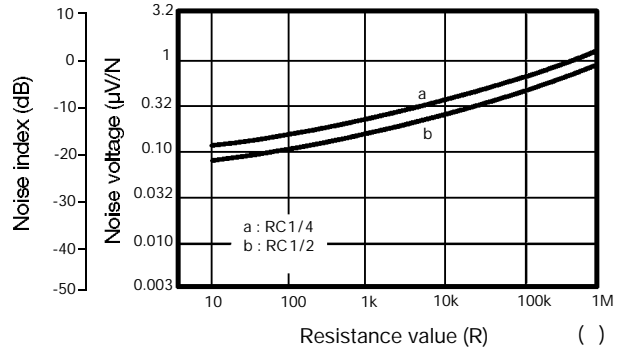


Aging Drift

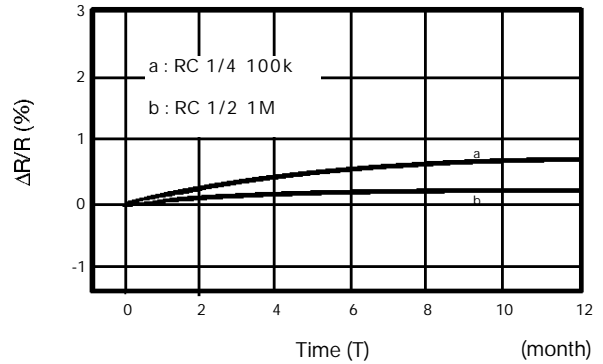

Load Life
At 70°C, Interval, Rated Load

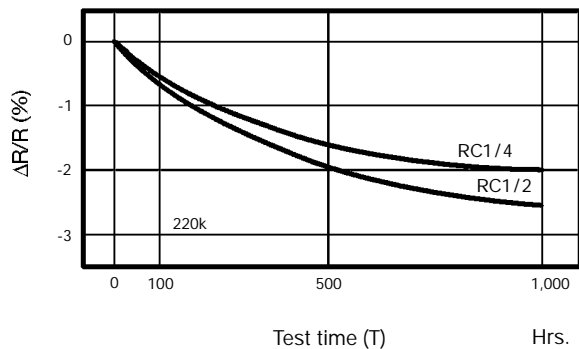

High Frequency Characteristic

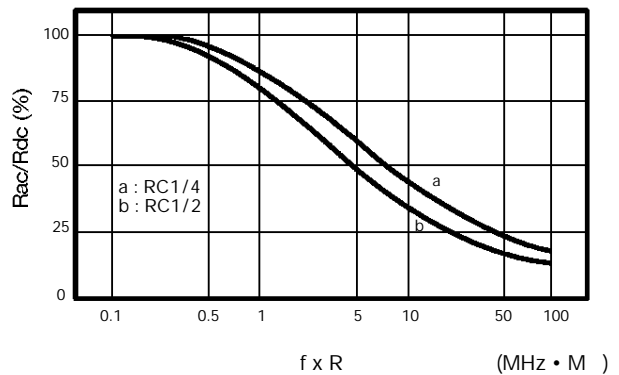

Carbon Composition Resistors



1 Watt

| DC Resistance | DC resistance value must be within the specified tolerance. | | | DC resistance value measured at the test voltage specified below: | | | | | | | | | | | |
|--|--|----------------------------|---------------------------|---|--------------------|-----------------|--------------|------------|-----------|------------|----------------|-----------|------------------|------------|--------------------|
| | | | | <table border="1"> <thead> <tr> <th>Nominal Resistance</th> <th>DC test voltage</th> </tr> </thead> <tbody> <tr> <td>99 and lower</td> <td>0.5V to 1V</td> </tr> <tr> <td>10 to 999</td> <td>2.5V to 3V</td> </tr> <tr> <td>1,000 to 9,999</td> <td>8V to 10V</td> </tr> <tr> <td>10,000 to 99,999</td> <td>24V to 30V</td> </tr> <tr> <td>100,000 and higher</td> <td>80V to 100V</td> </tr> </tbody> </table> | Nominal Resistance | DC test voltage | 99 and lower | 0.5V to 1V | 10 to 999 | 2.5V to 3V | 1,000 to 9,999 | 8V to 10V | 10,000 to 99,999 | 24V to 30V | 100,000 and higher |
| Nominal Resistance | DC test voltage | | | | | | | | | | | | | | |
| 99 and lower | 0.5V to 1V | | | | | | | | | | | | | | |
| 10 to 999 | 2.5V to 3V | | | | | | | | | | | | | | |
| 1,000 to 9,999 | 8V to 10V | | | | | | | | | | | | | | |
| 10,000 to 99,999 | 24V to 30V | | | | | | | | | | | | | | |
| 100,000 and higher | 80V to 100V | | | | | | | | | | | | | | |
| Resistance Temperature Characteristics | Nominal Resistance | Test Temp. @ -55°C | Test Temp. @ 100°C | $\frac{R_2 - R_1}{R_1} \times 100(\%)$ <p>R1: Resistance value at reference temp. R2: Resistance value at test temp.</p> <p>Sequence of temp: -25°C, -15°C, -55°C, 25°C, 60°C, 100°C</p> | | | | | | | | | | | |
| | 1.0K and under | 6.5 to -3% | 5 to 4% | | | | | | | | | | | | |
| | 1.1K to 10K | 10 to -3% | 6 to 5% | | | | | | | | | | | | |
| | 11K to 100K | 13 to -3% | 7.5 to 6% | | | | | | | | | | | | |
| | 110K to 1M | 15 to -3% | 10 to 7% | | | | | | | | | | | | |
| | 1.1M to 10M | 20 to -3% | 10 to 7% | | | | | | | | | | | | |
| | 11M and over | 25 to -3% | 10 to 7% | | | | | | | | | | | | |
| Voltage Coefficient (Application for 1K min.) | A total resistance change of 2% maximum or chart below. | | | Instantaneous change in resistance per volt based on: $\frac{R - r}{r} \times \frac{100}{0.9 \times \text{RCWV}} \quad (\% / \text{V})$ | | | | | | | | | | | |
| | Rated Power | Coefficient Voltage | | | | | | | | | | | | | |
| | 1 Watt | -.0.020%/V | | | | | | | | | | | | | |
| Dielectric Withstanding Voltage | No evidence of flashover, mechanical damage, arcing or insulation breakdown. | | | Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively specified in the above list for 5 seconds. | | | | | | | | | | | |
| Insulation Resistance | 10,000M Min. | | | Resistors shall be clamped in the trough of a 90° metallic V-block and shall be measured at DC 100V for 1/4W and DC 500V for 1/2W and 1W. | | | | | | | | | | | |



Carbon Composition Resistors

1 Watt

| Temperature Cycling | $\pm 4\%$ Max. with no evidence of mechanical damage. | Resistance change after continuous five cycles for duty cycle specified below. <table border="1" data-bbox="1039 384 1495 630"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Time (minute)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55°C</td> <td>30</td> </tr> <tr> <td>2</td> <td>25°C</td> <td>10 to 15</td> </tr> <tr> <td>3</td> <td>85°C</td> <td>30</td> </tr> <tr> <td>4</td> <td>25°C</td> <td>10 to 15</td> </tr> </tbody> </table> | Step | Temperature | Time (minute) | 1 | -55°C | 30 | 2 | 25°C | 10 to 15 | 3 | 85°C | 30 | 4 | 25°C | 10 to 15 |
|--------------------------------|---|--|------|-------------|---------------|------|------------|--|---|------|----------|---|------|----|---|------|----------|
| Step | Temperature | Time (minute) | | | | | | | | | | | | | | | |
| 1 | -55°C | 30 | | | | | | | | | | | | | | | |
| 2 | 25°C | 10 to 15 | | | | | | | | | | | | | | | |
| 3 | 85°C | 30 | | | | | | | | | | | | | | | |
| 4 | 25°C | 10 to 15 | | | | | | | | | | | | | | | |
| Humidity (Steady State) | $\pm 10\%$ Max. with no evidence of arcing, burning, or charring. | Permanent resistance change after the application of a potential of 2.5 times RCWV, or the maximum overload voltage respectively specified in the above list, whichever is less for 5 seconds. | | | | | | | | | | | | | | | |
| Short Time Overload | $\pm(2.5\% + 0.05 \text{ })$ Max. with no evidence of arcing, burning, or charring. | Permanent resistance change after the application of a potential of 2.5 time RCWV, or the maximum overload voltage respectively specified in the above list, whichever is less for 5 seconds. | | | | | | | | | | | | | | | |
| Load Life in Humidity | $\pm 20\%$ Max. with no evidence of mechanical damage. | 500 hours exposure in a humidity test chamber controlled at $40^\circ \pm 2^\circ\text{C}$ and 90 to 95 relative humidity. | | | | | | | | | | | | | | | |
| Load Life | <table border="1" data-bbox="427 1266 982 1446"> <thead> <tr> <th colspan="2">Resistance Change</th> </tr> </thead> <tbody> <tr> <td>Average</td> <td>$\pm 6\%$</td> </tr> <tr> <td>Max.</td> <td>$\pm 10\%$</td> </tr> </tbody> </table> | Resistance Change | | Average | $\pm 6\%$ | Max. | $\pm 10\%$ | Permanent resistance change after 1,000 hours operating at RCWV, or max. RCWV, whichever is less with a duty cycle of 1.5 hours "ON", 0.5 hours "OFF" at $70^\circ \pm 2^\circ\text{C}$ ambient. | | | | | | | | | |
| Resistance Change | | | | | | | | | | | | | | | | | |
| Average | $\pm 6\%$ | | | | | | | | | | | | | | | | |
| Max. | $\pm 10\%$ | | | | | | | | | | | | | | | | |
| Terminal Strength | $\pm (1\% + 0.05 \text{ })$ Max. with no evidence of mechanical damage. | Direct load: Resistance to a 2.5 kgf (25N) direct load for 5 seconds in the direction of the longitudinal axis of the terminal leads. Twist test: Terminal leads shall be bent through 90° at a point of 6.35mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations. | | | | | | | | | | | | | | | |

Carbon Composition Resistors




1 Watt

| | | |
|-------------------------------------|---|---|
| Resistance to Soldering Heat | $\pm (3\% + 0.05)$ Max. with no evidence of mechanical damage. | Permanent resistance change when leads immersed 4.0 ± 0.8 mm from the body in $350^\circ \pm 10^\circ\text{C}$, solder for 3 ± 0.5 seconds. |
| Vibration | $\pm (1\% + 0.05)$ Max. with no evidence of mechanical, electrical damage and electrical discontinuity. | A single vibration having an amplitude for 1.6 mm. for 2 hours in each X, Y, Z, direction. One minute between 10 and 55 Hz. |
| Low Temperature Operation | $\pm 3\%$ Max. with no evidence of mechanical damage. | Resistor shall be placed in a cold chamber at room temperature, the temperature shall be gradually decreased to $-65 +10/-5^\circ\text{C}$. After 1 hour of stabilization at this temperature, RCWV or maximum RCWV, whichever less shall be applied for 45 minutes. Return to room temperature. Resistance change measured 24 hours after the test. |
| Solderability | 95% coverage Min. | Test temperature of solder: $230 \pm 5^\circ\text{C}$, Dwell time in solder: 3 ± 0.5 seconds. |
| Resistance to Solvents | No deterioration of color code paints. | Color code paints must resist the solvent test per MIL-STD-202 Method 215 |
| Overload Test | $\pm 10\%$ Max. with no evidence of mechanical damage. | In room temperature, 1350V AC in 1 second or 1000V AC in 1 minute shall be applied. |
| High Voltage Pulse | $\pm 50\%$ Max. with no evidence of mechanical damage. | The resistors are subjected to 50 discharges at a maximum rate of 12 per minute, from a 1000 pF capacitor charged to 10kV, in test circuit as shown below. <div style="text-align: center; margin-top: 10px;"> <pre> graph LR DC[DC 10kV] --- Switch[Switch] Switch --- R1[1k] R1 --- C[1,000pF] C --- Sample[Sample] </pre> </div> |




Carbon Composition Resistors

Hot-Spot Temperature Due to Rate of Power Dissipation

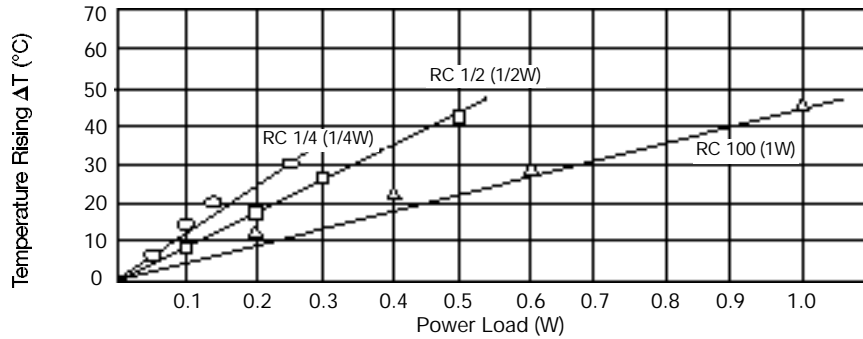


Taping Specifications

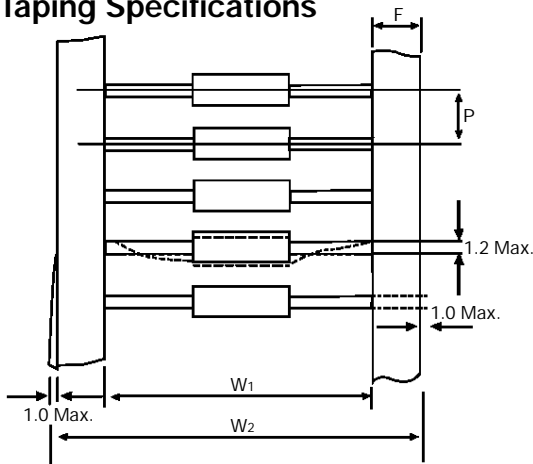

| Part No. | Taping Dimensions (mm) | | | | |
|----------|------------------------|-------|----------------|----------------|-----|
| | P | 50XP | W ₁ | W ₂ | F |
| RC 1/4 | 5±0.5 | 254±2 | 52±1 | 66 Max. | 6±1 |
| RC 1/2 | 5±0.5 | 254±2 | 52±1 | 66 Max. | 6±1 |

Tape & Box (Suffix TB)

| Series | Quantity (per box) | Box | | |
|--------|--------------------|-----|----|-----|
| | | a | b | c |
| RC 1/4 | 2,000 | 70 | 55 | 260 |
| RC 1/2 | 1,000 | 70 | 55 | 260 |



Tape & Reel (Suffix T)

| Series | Quantity (per reel) | Reel | | |
|--------|---------------------|------|-----|-----|
| | | AA | B | BB |
| RC 1/4 | 5,000 | 80 | 343 | 315 |
| RC 1/2 | 5,000 | 80 | 343 | 315 |

