

POWER MANAGEMENT

Description

The EZ1117 series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at up to 0.8A (1A for EZ1117A).

Additionally, the EZ1117 series provides excellent regulation over variations in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device.

The EZ1117 series of three terminal regulators offer fixed and adjustable voltage options available in the space saving SOT-223 and TO-263 packages.

Features


- ◆ Low dropout performance: 1.2V max. for EZ1117, 1.3V max. for EZ1117A
- ◆ Full current rating over line and temperature
- ◆ Fast transient response
- ◆ $\pm 2\%$ total output regulation over line, load and temperature
- ◆ Adjust pin current max 90 μ A over temperature
- ◆ Fixed/adjustable output voltage
- ◆ Line regulation 0.2% max.
- ◆ Load regulation 0.4% max.
- ◆ SOT-223 and TO-263 packages

Applications


- ◆ Low voltage microcontrollers
- ◆ Switching power supply post-regulation

Typical Application Circuit

Fixed Voltage Regulator

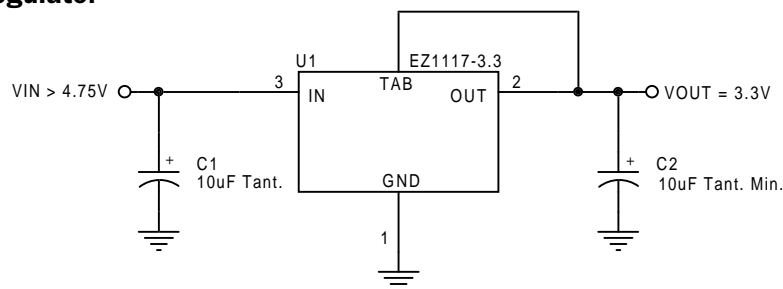

Adjustable Voltage Regulator

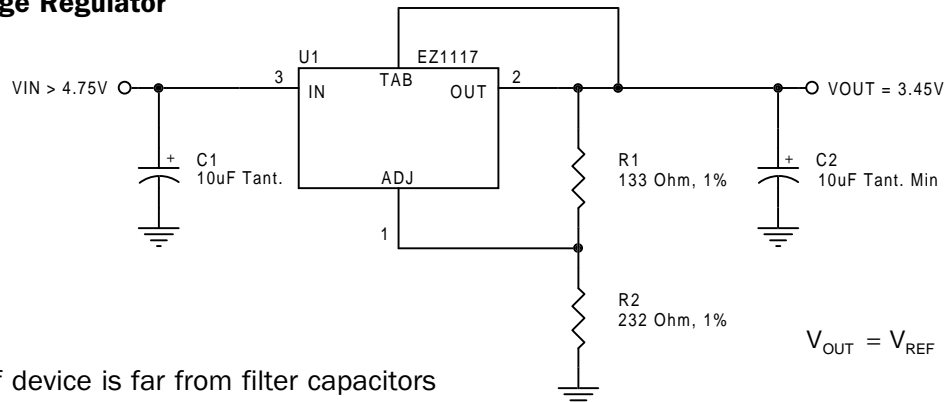

Notes:

- (1) C1 needed if device is far from filter capacitors
- (2) C2 minimum value required for stability

$$V_{OUT} = V_{REF} \cdot \left(1 + \frac{R2}{R1}\right) + I_{ADJ} \cdot R2$$

POWER MANAGEMENT
Absolute Maximum Ratings

Parameter	Symbol	Maximum	Units
Input Supply Voltage	V_{IN}	7	V
Power Dissipation	P_D	Internally Limited	W
Thermal Resistance Junction to Case SOT-223 TO-263	θ_{JC}	15 3	°C/W
Thermal Resistance Junction to Ambient SOT-223 TO-263	θ_{JA}	156 60	°C/W
Operating Junction Temperature Range	T_J	0 to 125	°C
Storage Temperature Range	T_{STG}	-65 to 150	°C
Lead Temperature (Soldering) 10 Sec.	T_{LEAD}	300	°C
ESD Rating (Human Body Model)	ESD	2	kV

Electrical Characteristics⁽⁶⁾

Unless otherwise specified: Adj. Option: $V_{IN} = 2.65V$ to $7.0V$ and $I_o = 10mA$ to I_{RATED} . Fixed Options: $I_o = 0mA$ to I_{RATED} , $V_{IN} (2.5V) = 3.9V$ to $7.0V$, $V_{IN} (2.85V) = 4.25V$ to $7.0V$, $V_{IN} (3.3V) = 4.75V$ to $7.0V$.

Parameter	Symbol	V_{IN}	I_o	$T_J^{(5)}$	Min	Typ	Max	Units
Output Voltage ⁽¹⁾ (Fixed Voltage Versions)	V_O	5V	0mA	25°C	-1%	V_O	+1%	V
				O.T.	-2%		+2%	
Reference Voltage ⁽¹⁾ (Adj Voltage Version)	V_{REF}	5V	10mA	25°C	1.238	1.250	1.262	V
				O.T.	1.225		1.275	
Line Regulation ⁽¹⁾	$REG_{(LINE)}$		10mA	O.T.		0.035	0.2	%
Load Regulation ⁽¹⁾	$REG_{(LOAD)}$	5V		O.T.		0.2	0.4	%
Dropout Voltage ⁽¹⁾⁽²⁾ EZ1117A	V_D		100mA 500mA 800mA 1000mA	O.T.		1.00 1.05 1.10 1.10	1.10 1.15 1.20 1.30	V
Current Limit EZ1117 EZ1117A	I_{CL}			O.T.	0.8 1.0			A
Quiescent Current Fixed Voltage Version	I_Q	5V		O.T.		10	13	mA
Temperature Coefficient	T_C			O.T.		0.005		%/°C

POWER MANAGEMENT
Electrical Characteristics (Cont.)⁽⁶⁾

Unless otherwise specified: Adj. Option: $V_{IN} = 2.65V$ to $7.0V$ and $I_O = 10mA$ to I_{RATED} . Fixed Options: $I_O = 0mA$ to I_{RATED} , $V_{IN} (2.5V) = 3.9V$ to $7.0V$, $V_{IN} (2.85V) = 4.25V$ to $7.0V$, $V_{IN} (3.3V) = 4.75V$ to $7.0V$.


Parameter	Symbol	V_{IN}	I_O	$T_J^{(5)}$	Min	Typ	Max	Units
Adjust Pin Current	I_{ADJ}			O.T.		55	90	μA
Adjust Pin Current Change	ΔI_{ADJ}			O.T.		0.2	5	μA
Temperature Stability	T_S			O.T.		0.5		%
Minimum Load Current Adj Voltage Version	I_O	5V		O.T.		5	10	mA
RMS Output Noise ⁽³⁾	V_N			25°C		0.003		% V_O
Ripple Rejection Ratio ⁽⁴⁾	R_A	5V	I_{RATED}	O.T.	60	72		dB

NOTES:

- (1) Low duty cycle pulse testing with Kelvin connections required.
- (2) $\Delta V_{OUT}, \Delta V_{REF} = 1\%$.
- (3) Bandwidth of 10 Hz to 10kHz.
- (4) 120Hz input ripple (C_{ADJ} for ADJ = 25 μF).
- (5) O.T. = over specified operating junction temperature range.
- (6) $I_{RATED} = 1A$ for EZ1117A and 800mA for EZ1117.

POWER MANAGEMENT

Pin Configuration

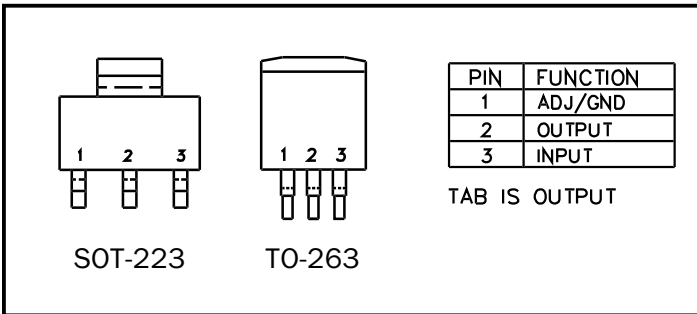

Ordering Information


Device ⁽¹⁾⁽²⁾	Package
EZ1117CST-X.X.TR EZ1117ACST-X.X.TR	SOT-223
EZ1117CM-X.X.TR EZ1117ACM-X.X.TR	TO-263



Notes:

(1) Where X.X denotes voltage options. Available voltages are: 2.5V, 2.85V and 3.3V. Leave blank for adjustable version (1.3 to 5.7V). Contact factory for additional voltage options.

(2) Only available in tape and reel packaging. A reel contains 2500 (SOT-223) or 800 (TO-263) devices.


Block Diagram

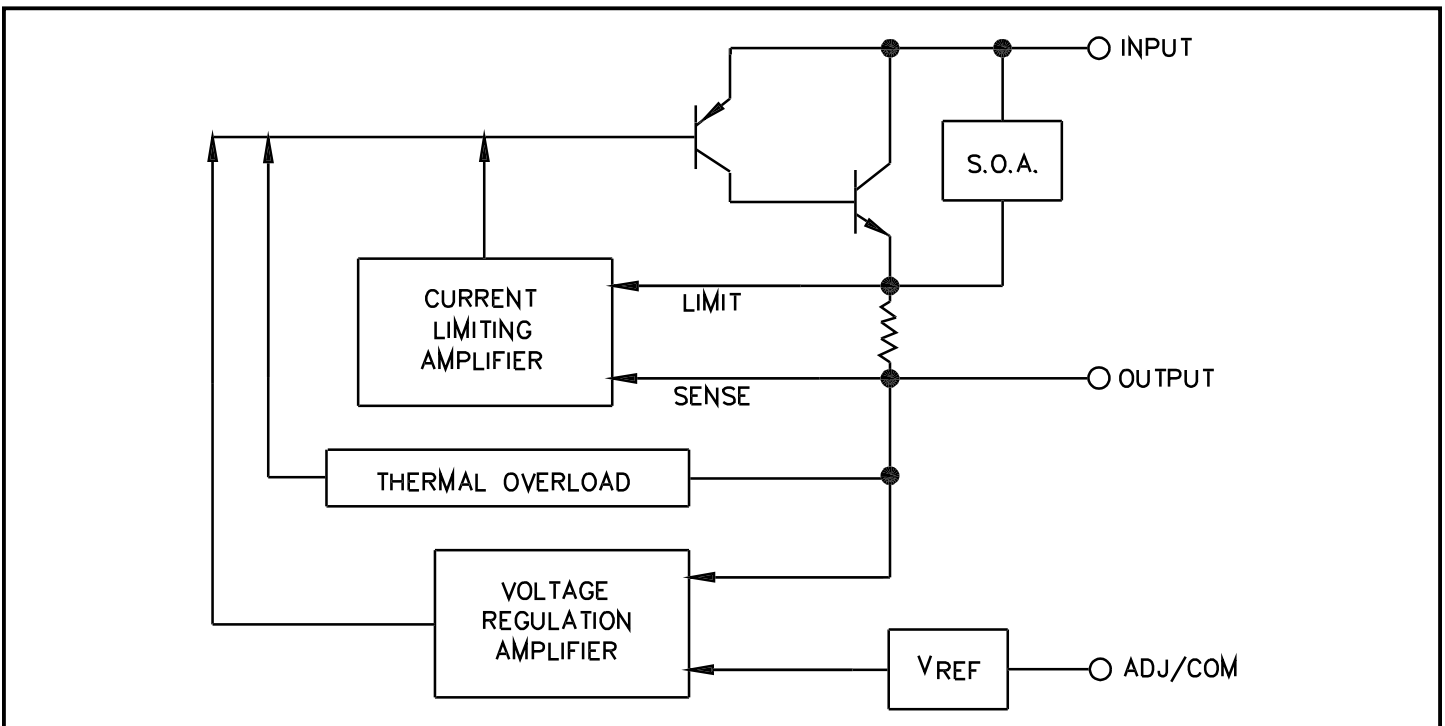

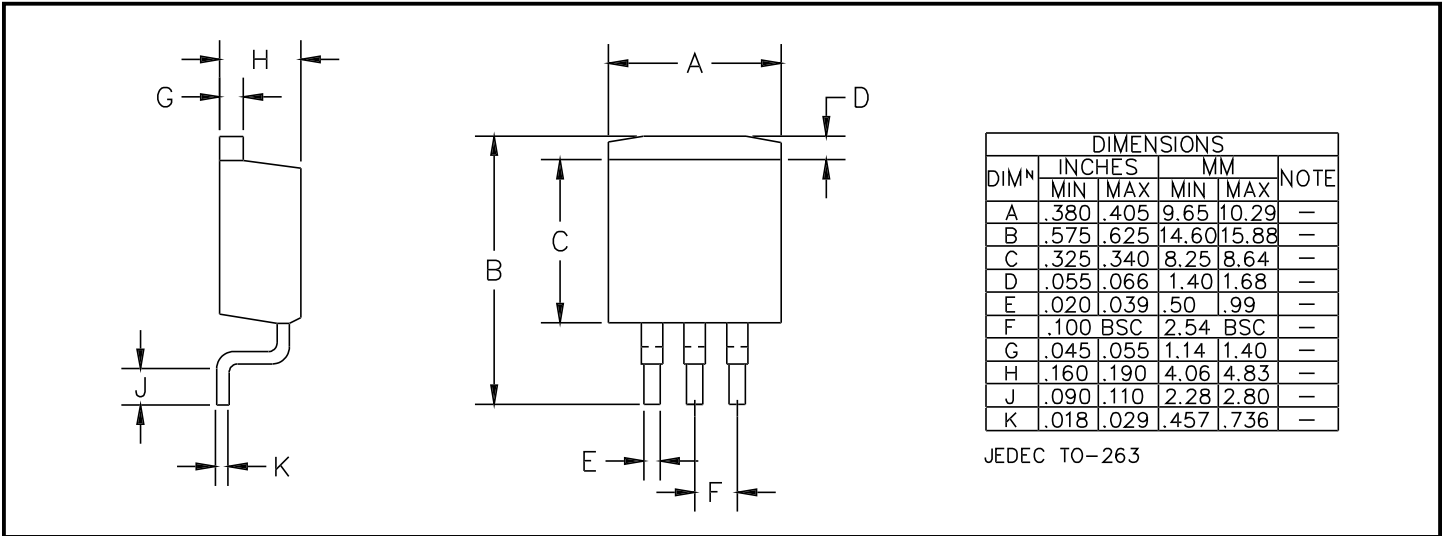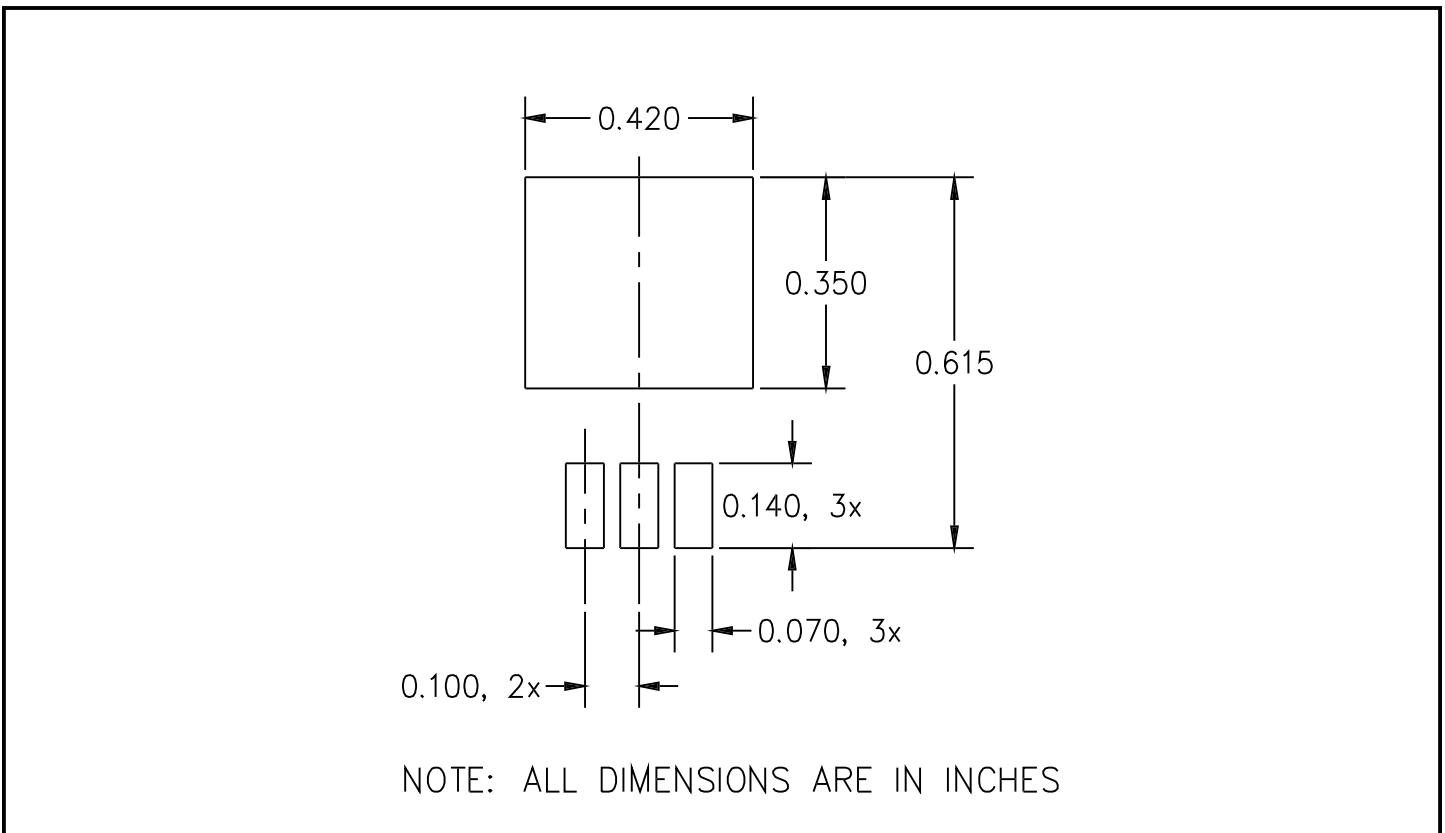
POWER MANAGEMENT
Outline Drawing - TO-263

Land Pattern - TO-263


POWER MANAGEMENT

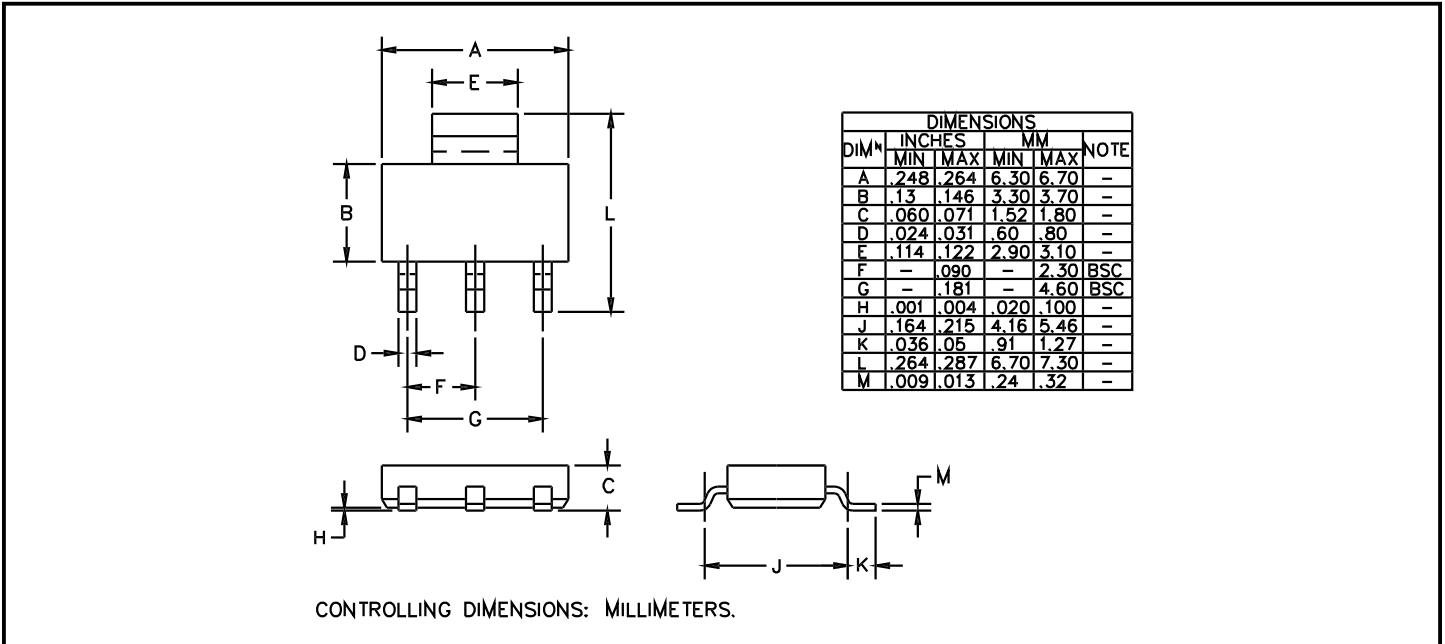Outline Drawing - SOT-223

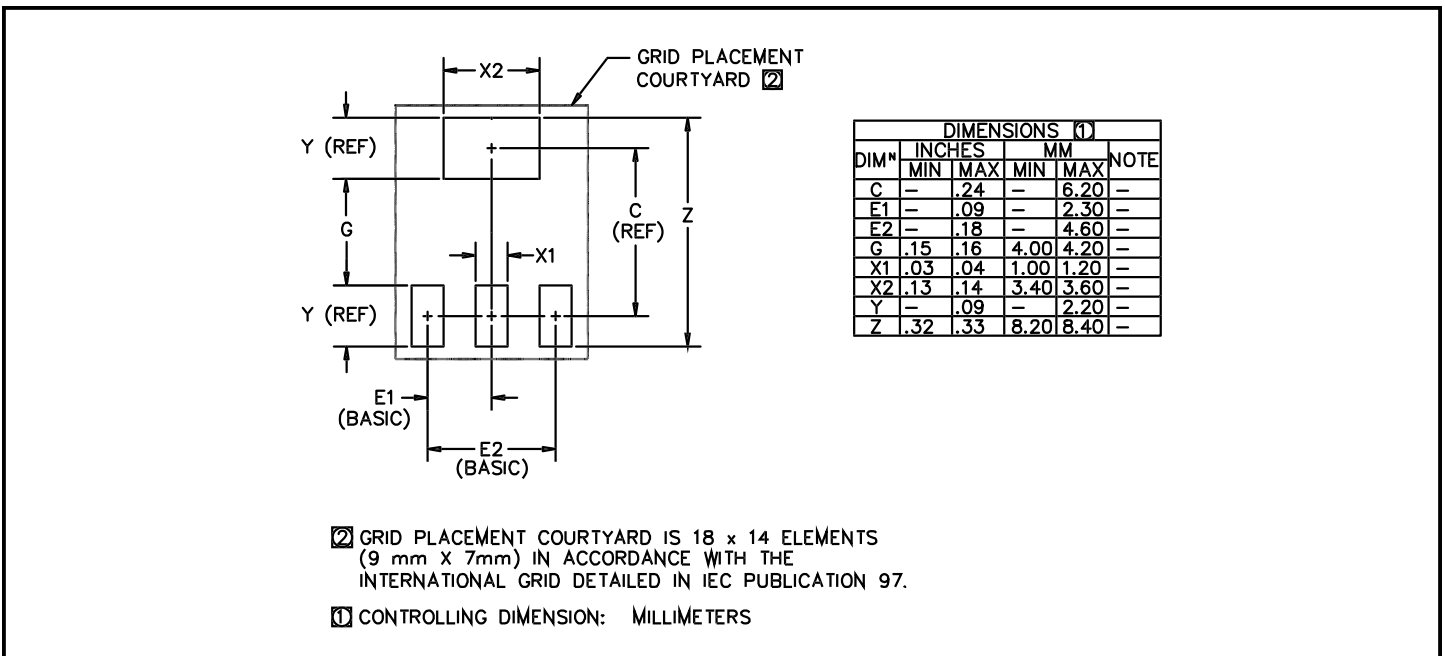

Land Pattern - SOT-223



Contact Information

Semtech Corporation
 Power Management Products Division
 652 Mitchell Rd., Newbury Park, CA 91320
 Phone: (805)498-2111 FAX (805)498-3804