
\sim


THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE
VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/ DWG NO. DAB RGC CT650035 5-2-03 4/7/03 \mathbb{S}

Downloaded from **Arrow.com**.

JACK, FLANGED

EIGHT POSITION, EIGHT CONTACT, VERTICAL MOUNT SHIELDED SHEW CONNECTOR a bel group http://www.stewartconnector.com 11118 Susquehanna Trail South Glen Rock, PA 17327—9199 (717) 235—7512






1 유



30 MICRO-INCHES [0.76um] 50 MICRO-INCHES [1.27um] CONTACT CONTACT PLATING IN MATING AREA SS-650810S-A-FLS-50 SS-650810S-A-FLS PART NUMBER

 \supset



.450 [11.43]

.670 [17.02] MAX.-.125 [3.18] ±.010 [0.25] (.155 [3.94]) (2) -.125 [3.17] (2)

 \supset

.670 [17.02] MAX.


STEWART |

.375 [9.52] (2)

.142 [3.61] (2)


- .640 [16.26] MAX. (MEASURED AT FACE
OF CONNECTOR)

.750 [19.05] MAX.

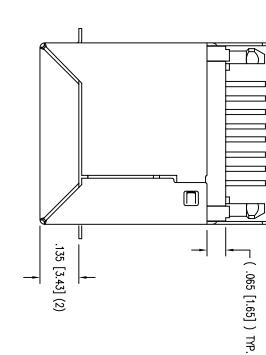

 \Box

| ب | 2 | | | | | | | × |
|---|---|---------------------------|---|-------------------------------|-------------------------------|---------------------------------|-------------------------|--------|
| 3. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD. | 2. FOR PRODUCT SPECIFICATIONS SEE PRO26-01. | SEE CHART FOR PART NUMBER | CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA | SHIELD PLATING: NICKEL OR TIN | CONTACTS/SHIELD: COPPER ALLOY | HOUSING: THERMOPLASTIC UL94 V-0 | 1. CONNECTOR MATERIALS: | NOTES: |

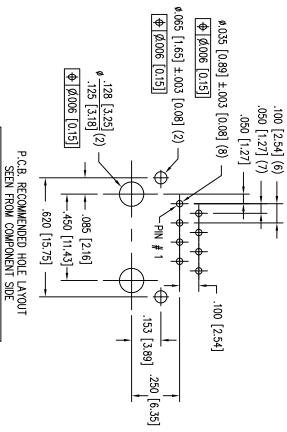

ALL CENTERLINE DIMENSIONS ARE BASIC.

 \Box

| | 8-25-17 | 10-25-16 | DATE | |
|--|---------|----------|-----------|--|
| | C5 | C4 | REV | |
| | 11072 | 10800 | ECN | |
| | TRM | TRM | APP'D. BY | |

2