




LOC		DIST		REVISIONS			
P	CHR	DESCRIPTION	DATE	OWN	APVD		
0		RELEASED	01/18/95	DW	DD		
A		REV PER 0010-0989-95	8/7/95	DW	DD		
B		REV PER 0010-1380-95	11/6/95	DW	DD		
C		OBS -2 PER EC 0010-0788-96	09 JUL 97	CR	MP		
D		REV PER EC 0410-0320-97	20 AUG 97	CR	MP		

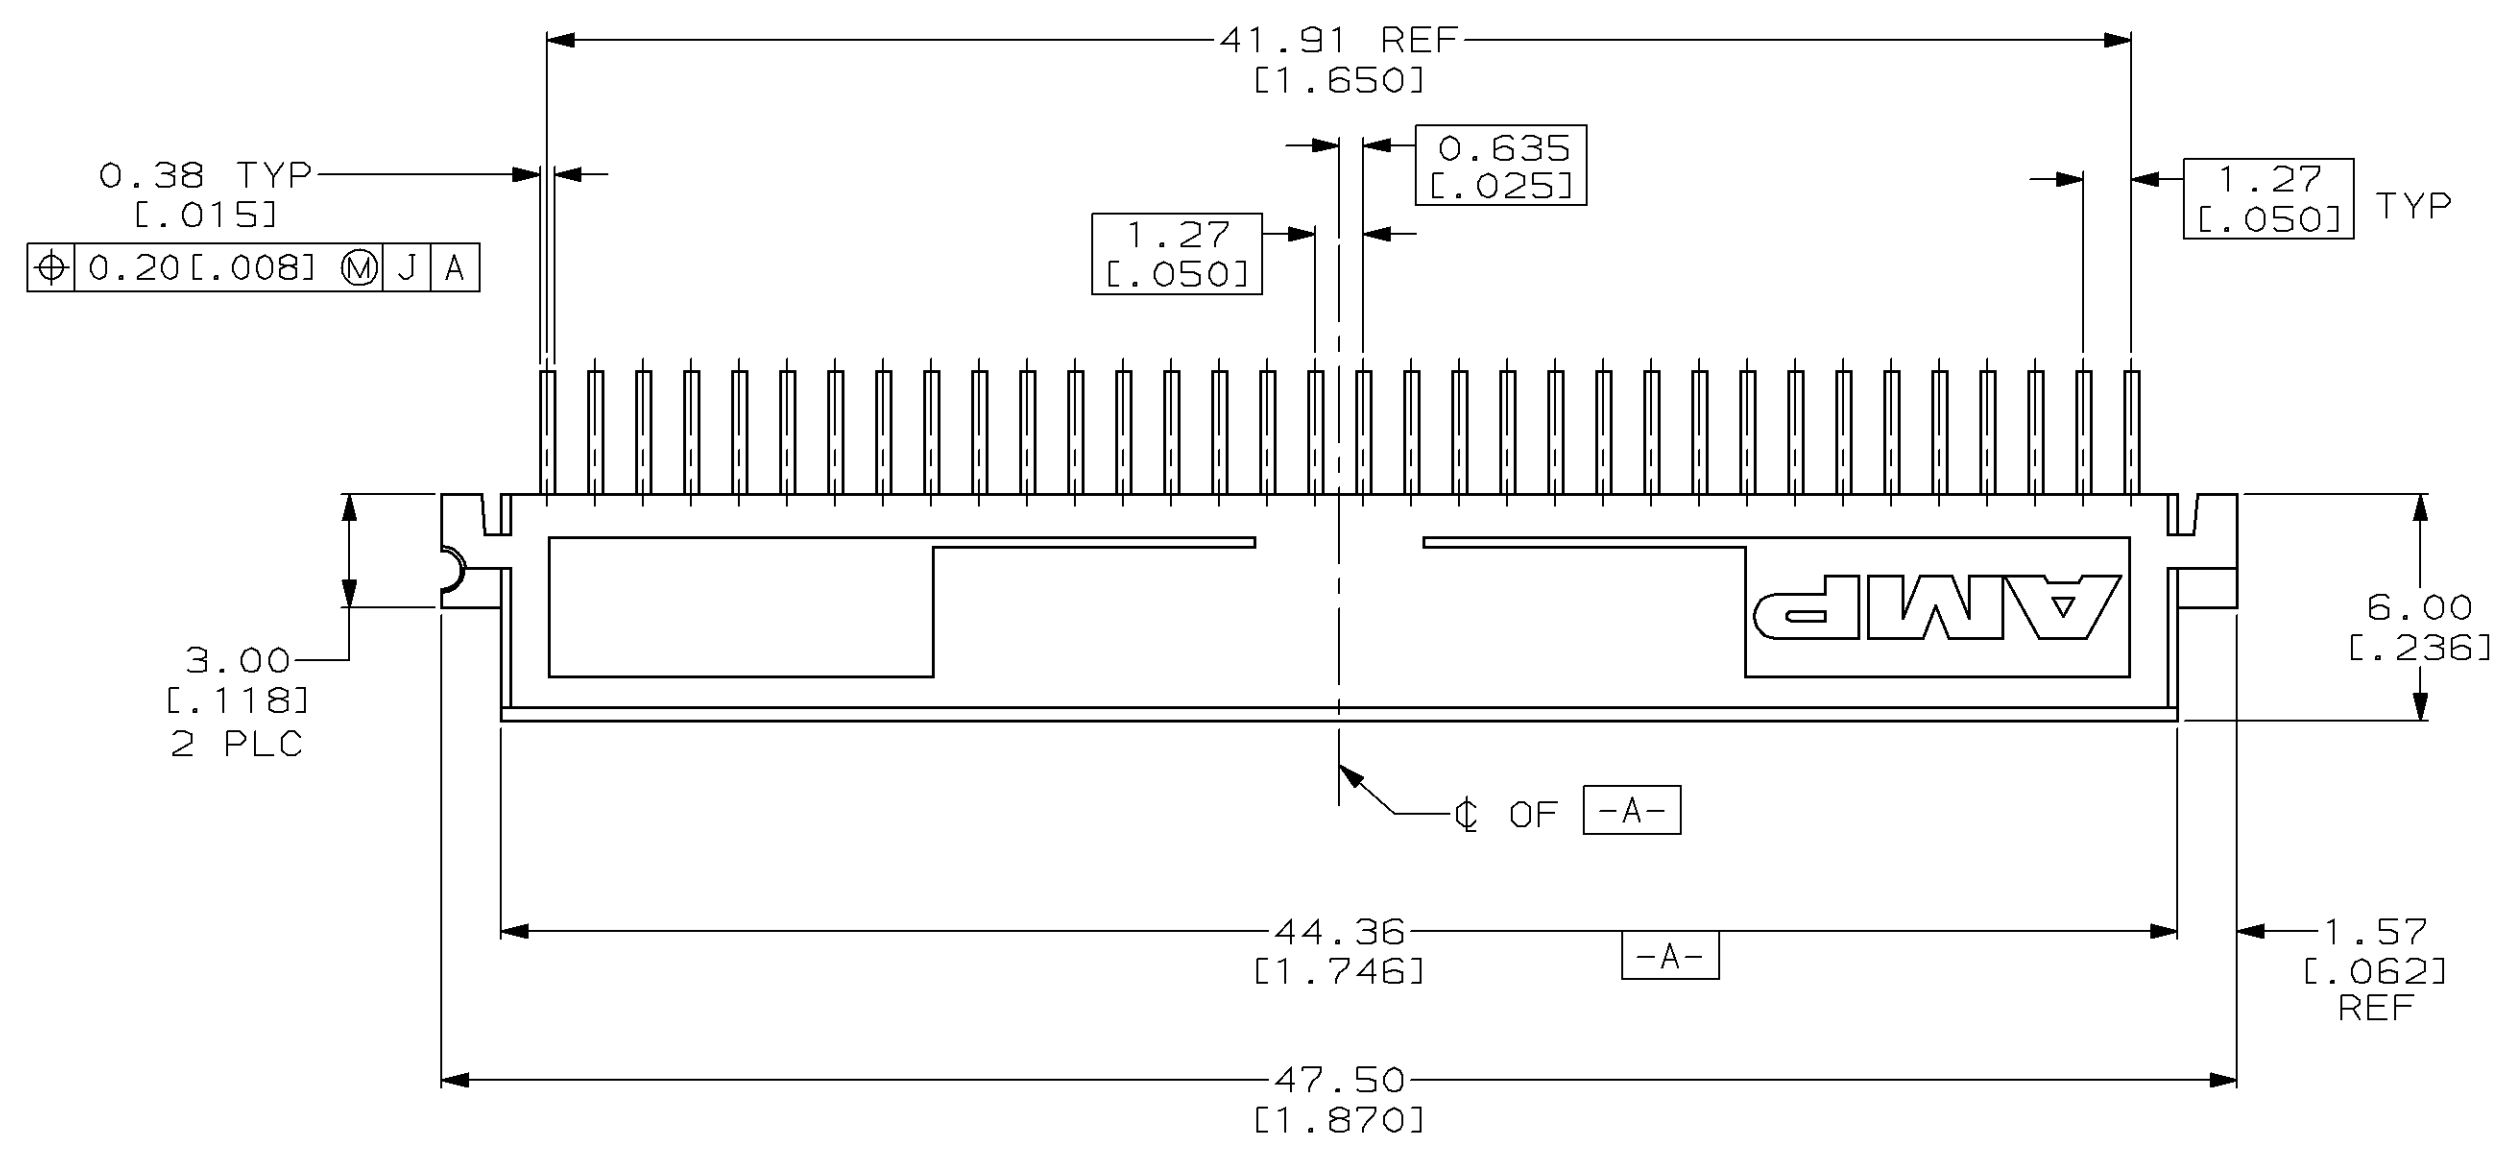


- 1 HOUSING: LCP, GLASS FILLED, COLOR: BLACK.
- 2 CONTACT: BERYLLIUM COPPER.
- 3 0.00076 [.000030] MINIMUM GOLD ON MATING AREA, 0.00254 [.000100] MINIMUM TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] MINIMUM NICKEL.
- 4 POINT OF CONTACT 2.3 [.091] REF FROM MATING FACE.
- 5 0.000127 [.000005] - 0.000203 [.000008] GOLD ON MATING AREA, 0.00254 [.000100] MINIMUM TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] MINIMUM NICKEL.

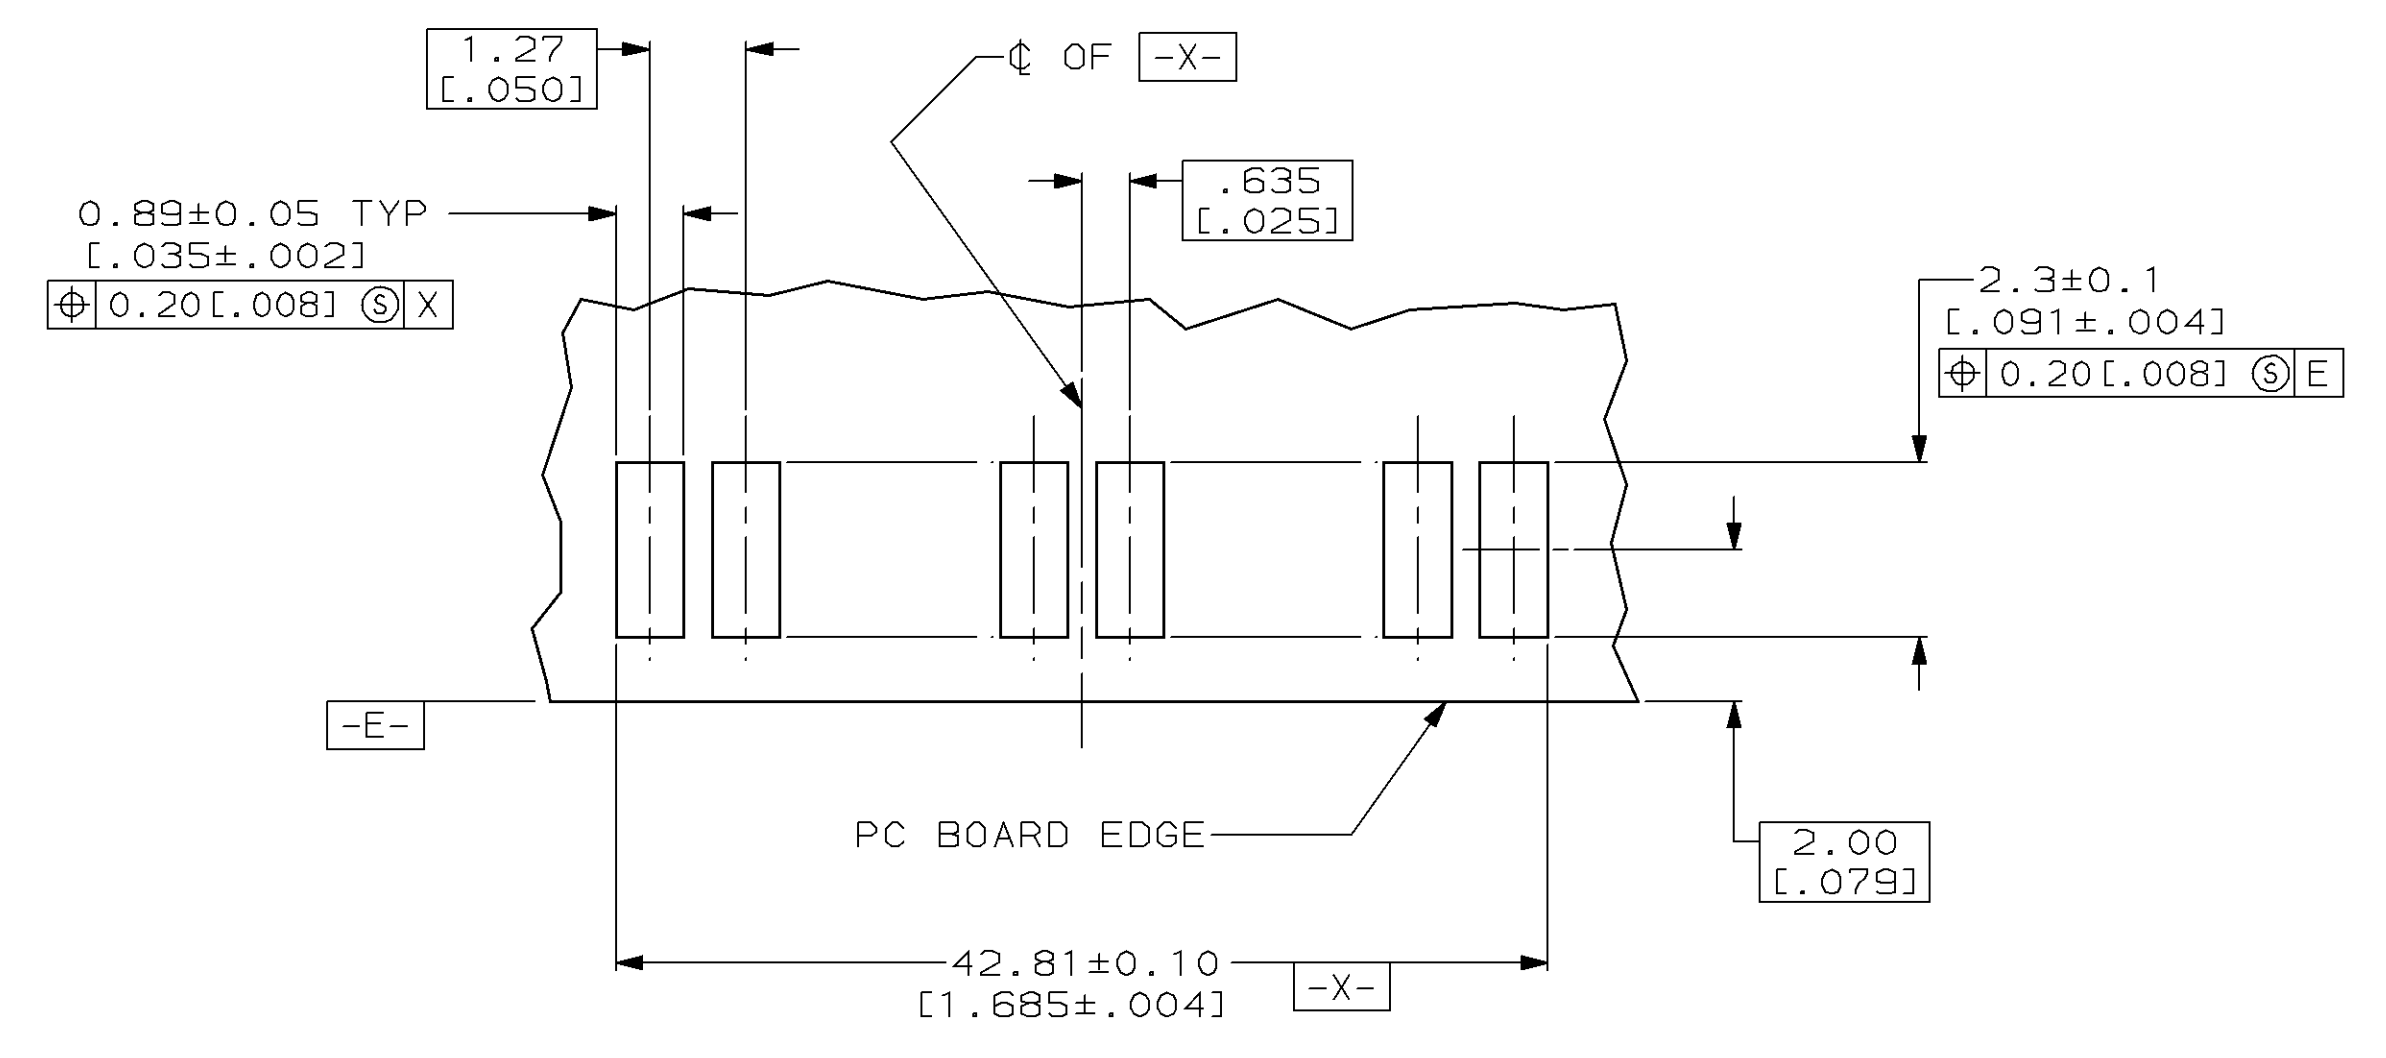


RECOMMENDED PC BOARD LAYOUT
SCALE 10:1

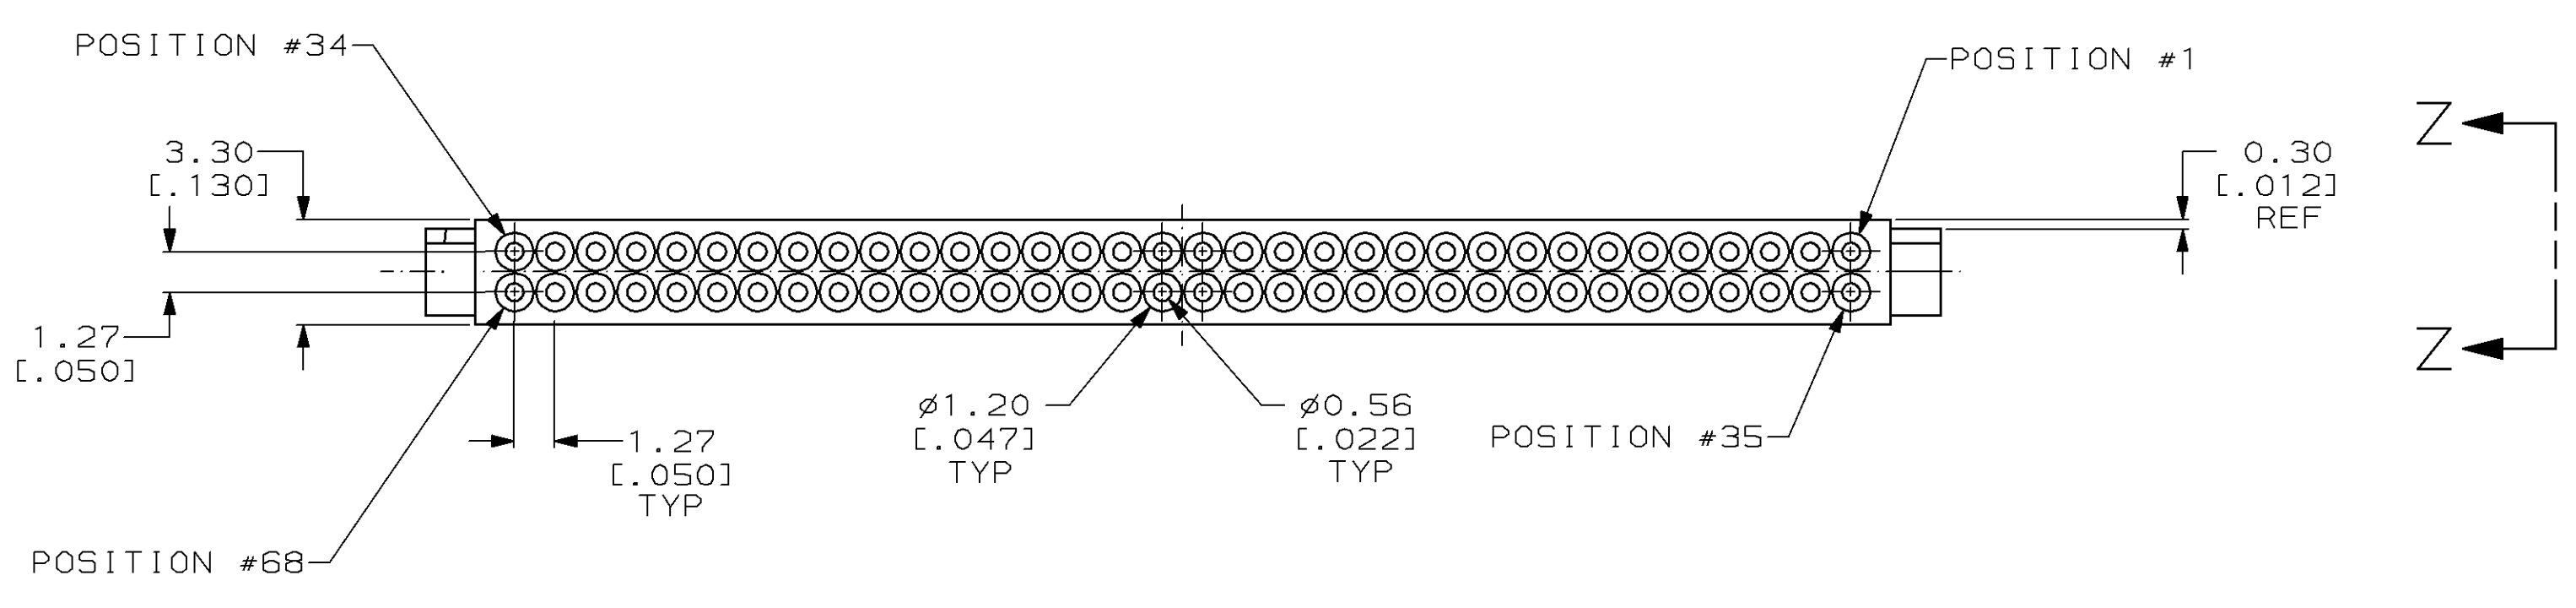

Z
Z

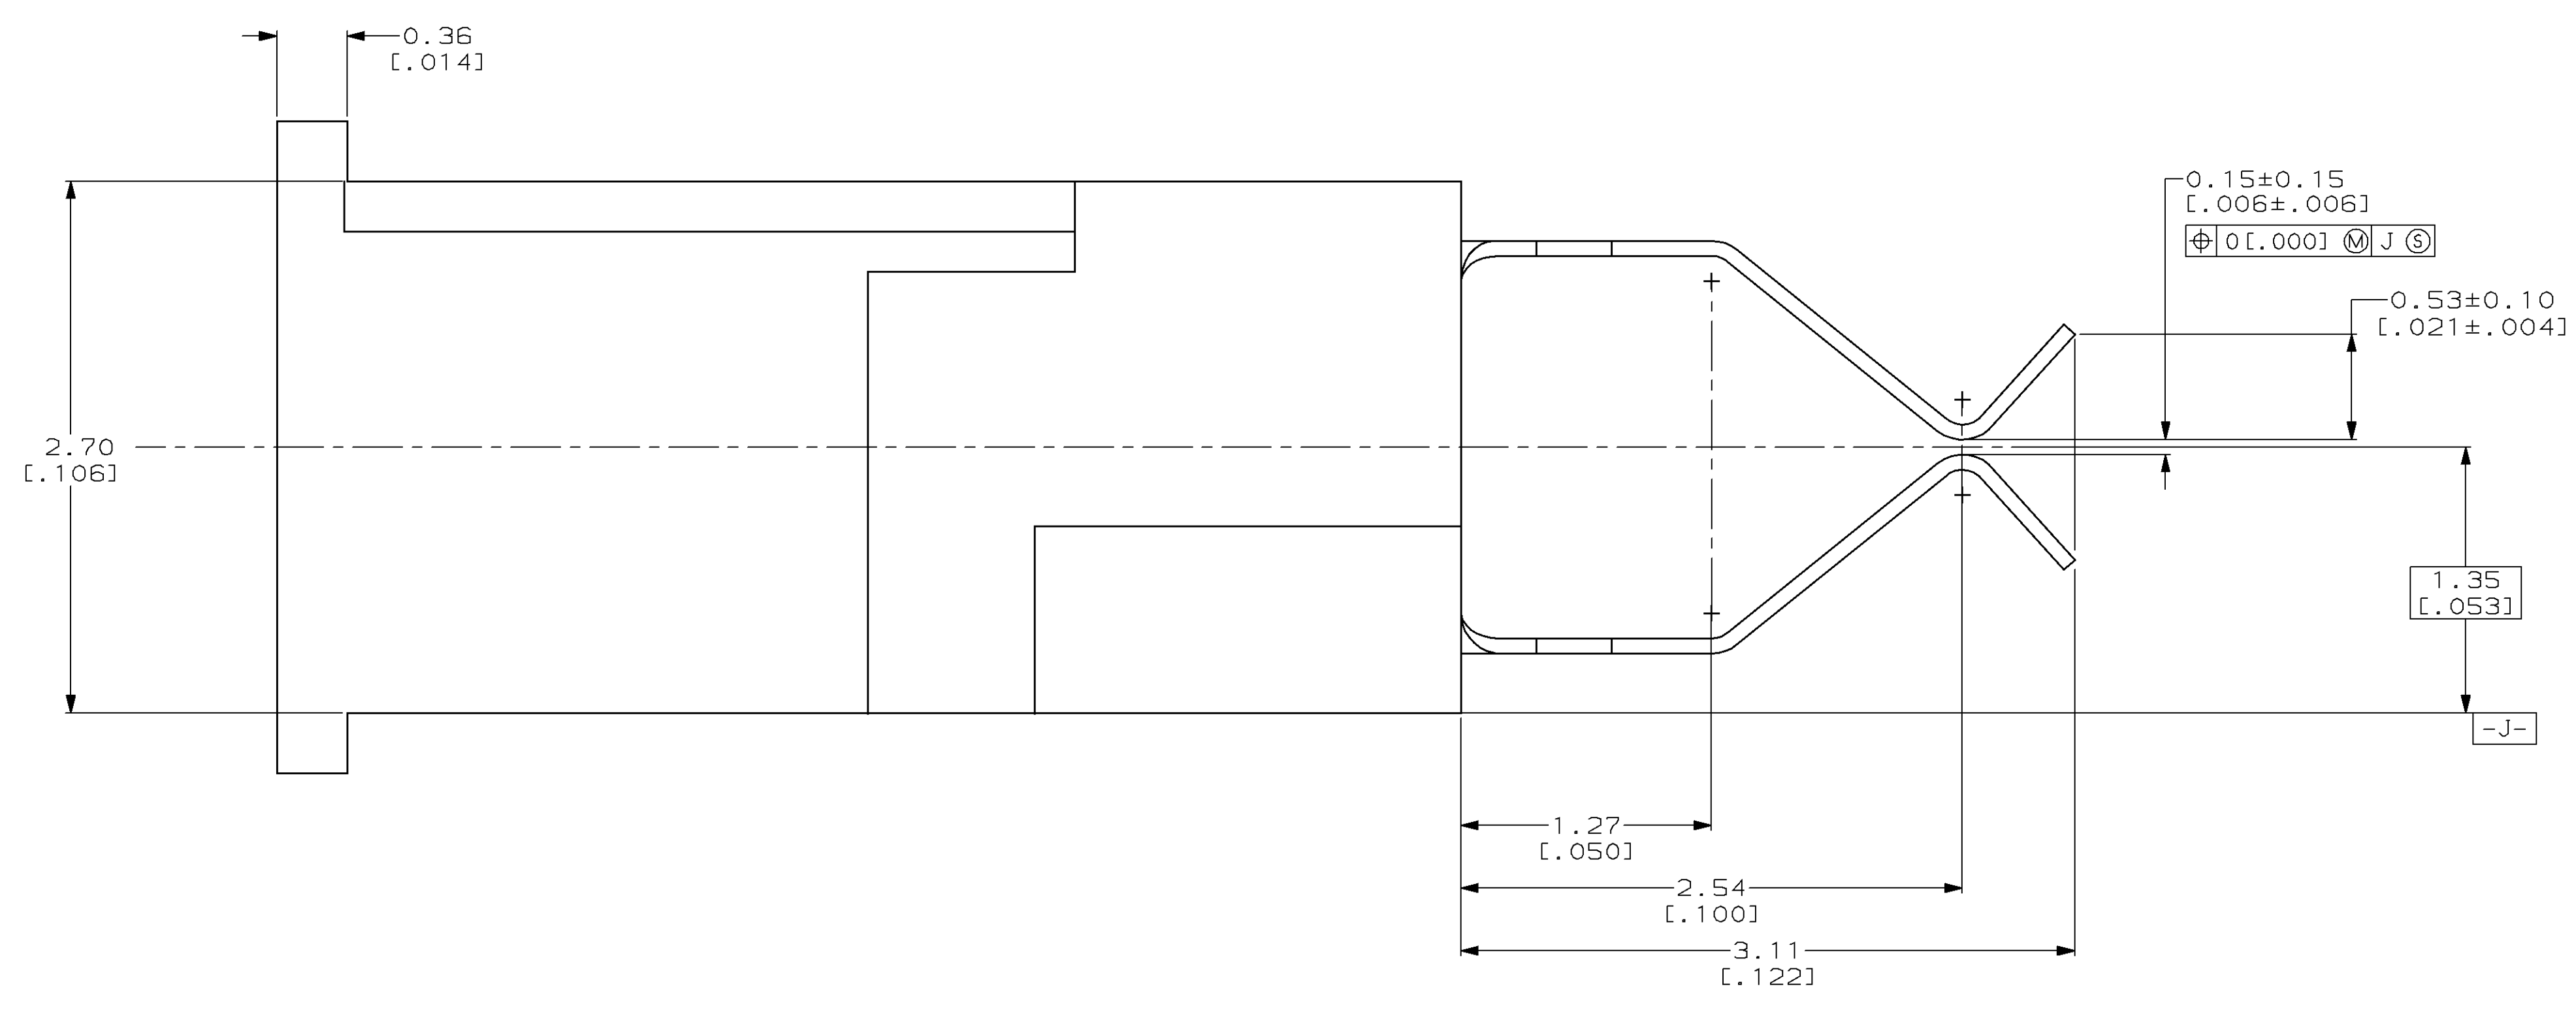

VIEW Z-Z
SCALE 40:1

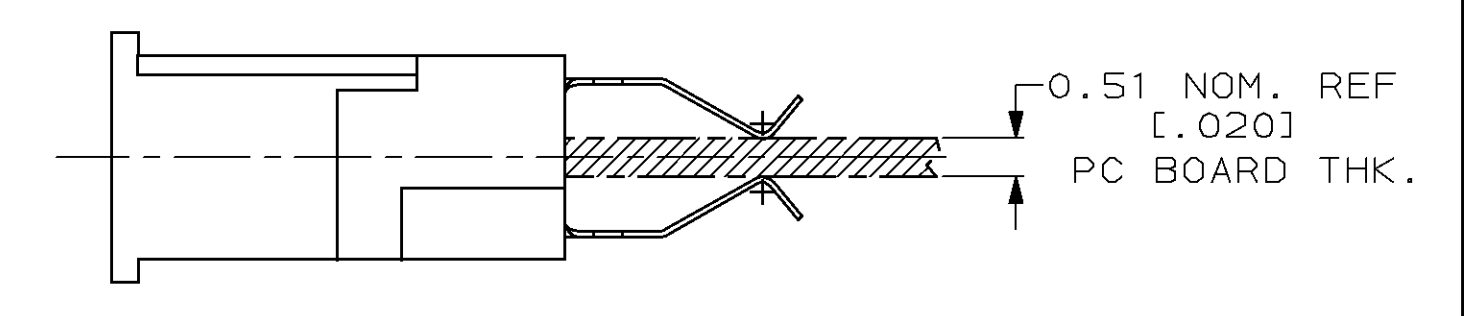

PC BOARD LOCATION (REF)
SCALE: 10:1

OBSELETE	68	146233-2
	68	146233-1
PLATING	POSITIONS	PART NUMBER

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DATE: 01/27/95 D. WERTZ DATE: 01/27/95 D. DIXON DATE: 01/27/95 D. DIXON	AMP Incorporated Harrisburg, PA 17105-3508
DIMENSIONS: mm 0 PLC ± 1 PLC ± 2 PLC ±0.13 (.005) 3 PLC ± 4 PLC ± ANGLES FINISH	TOLERANCES UNLESS OTHERWISE SPECIFIED: ± ±0.13 (.005) ± 40°/30°	PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	RCPT ASSEMBLY, 68 POSITION, CENTERED STRADDLE MOUNT, AMP MEMORY CARD SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=146233 SCALE: 5:1 SHEET: 1 OF 1 REV: D