


300 Series

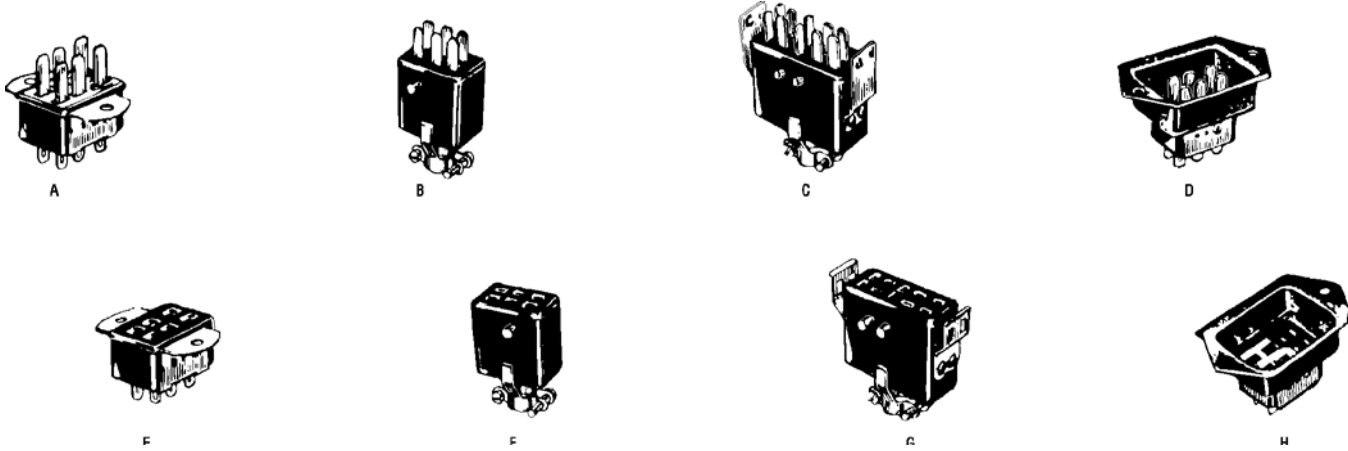

UL recognized file No. E19071. Rated 730 Volts rms. Contact Resistance: .016 ohms max. Rated Current: 10 amps.

Plugs with Angle Brackets — Fig. A

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3000	P-302-AB*	2	.90	.81	.75	.64
750-3002	P-303-AB	3	1.07	.96	.80	.69
750-3004	P-304-AB	4	1.15	1.03	.86	.74
750-3006	P-306-AB	6	1.49	1.34	1.12	.96
750-3012	P-312-AB	12	1.99	1.79	1.49	1.28

Sockets with Angle Brackets — Fig. E

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3001	S-302-AB*	2	1.03	.93	.77	.66
750-3003	S-303-AB	3	1.27	1.14	.95	.81
750-3005	S-304-AB	4	1.32	1.19	.99	.85
750-3007	S-306-AB	6	1.75	1.57	1.31	1.12

8

Plugs with Cable Clamp In Top — Fig. B

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3200	P-302-CCT*	2	1.83	1.65	1.37	1.18
750-3202	P-303-CCT	3	2.00	1.81	1.51	1.29
750-3204	P-304-CCT	4	2.26	2.03	1.69	1.45
750-3206	P-306-CCT	6	2.45	2.20	1.84	1.57
750-3210	P-310-CCT	10	2.90	2.61	2.18	1.87
750-3212	P-312-CCT	12	3.10	2.79	2.32	1.99
750-3214	P-315-CCT	15	4.57	4.11	3.42	2.93
750-3216	P-318-CCT	18	4.94	4.44	3.70	3.17
750-3218	P-321-CCT	21	5.93	5.34	4.45	3.81
750-3220	P-324-CCT	24	6.97	6.27	5.23	4.48

Sockets with Cable Clamp In Top — Fig. F

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3201	S-302-CCT*	2	1.95	1.75	1.46	1.25
750-3203	S-303-CCT	3	2.27	2.04	1.70	1.46
750-3205	S-304-CCT	4	2.29	2.06	1.72	1.47
750-3207	S-306-CCT	6	2.61	2.35	1.96	1.68
750-3215	S-315-CCT	15	5.76	5.18	4.32	3.70
750-3217	S-318-CCT	18	6.15	5.54	4.52	3.96
750-3219	S-321-CCT	21	7.03	6.32	5.27	4.52
750-3221	S-324-CCT	24	6.80	6.12	5.10	4.37

Plugs — Cable Clamp In Top with Locks — Fig. C

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3300	P-302-CCT-L*	2	3.33	3.00	2.50	2.14
750-3302	P-303-CCT-L	3	3.76	3.38	2.82	2.42
750-3304	P-304-CCT-L	4	3.67	3.30	2.75	2.36
750-3306	P-306-CCT-L	6	3.88	3.49	2.91	2.49

Sockets — Cable Clamp In Top with Keepers — Fig. G

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3301	S-302-CCT-K*	2	3.40	3.06	2.55	2.18
750-3303	S-303-CCT-K	3	4.05	3.65	3.04	2.61
750-3305	S-304-CCT-K	4	3.93	3.53	2.94	2.52
750-3307	S-306-CCT-K	6	4.30	3.87	3.22	2.76

Plugs with Deep Brackets For Recessed Mounting — Fig. D

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3400	P-304-DB	4	2.83	2.54	2.12	1.82
750-3402	P-306-DB	6	2.97	2.67	2.23	1.91
750-3406	P-312-DB	12	3.97	3.57	2.98	2.55


Sockets with Deep Brackets For Recessed Mounting — Fig. H

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-3401	S-304-DB	4	3.07	2.76	2.30	1.97
750-3403	S-306-DB	6	3.51	3.16	2.64	2.26
750-3405	S-308-DB	8	3.85	3.46	2.89	2.47
750-3407	S-312-DB	12	4.99	4.49	3.75	3.21

\*Round.

\*Round.

2400 Series

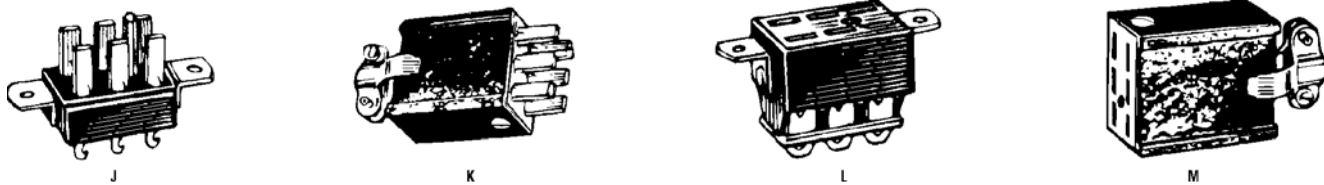

Designed for medium duty. Rated Voltage: 1100 V. Contact Resistance: .001 ohm avg. Rated Current: 15 amps.

Plugs with Angle Brackets — Fig. J

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-8626	P-2406-AB	6	4.58	4.12	3.43	2.94
750-8628	P-2408-AB	8	7.48	6.73	5.61	4.81

Sockets with Angle Brackets — Fig. L

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-8642	S-2404-AB	4	3.03	2.52	2.16	2.02
750-8644	S-2406-AB	6	4.02	3.62	3.02	2.59
750-8646	S-2408-AB	8	6.53	5.88	4.90	4.20

Plugs with Cable Clamp On Top — Fig. K

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-8630	P-2402-CCT	2	5.80	5.22	4.35	3.73
750-8632	P-2404-CCT	4	6.00	5.40	4.50	3.86
750-8634	P-2406-CCT	6	6.53	5.88	4.90	4.20
750-8636	P-2408-CCT	8	6.98	6.29	5.24	4.49
750-8638	P-2410-CCT	10	7.80	7.02	5.85	5.01
750-8640	P-2412-CCT	12	8.09	7.28	6.07	5.20

Sockets with Cable Clamp On Top — Fig. M

Stock No.	Mfr.'s Type	No. of Contacts	EACH			
			1-24	25-49	50-99	100-249
750-8648	S-2402-CCT	2	5.59	5.03	4.19	3.59
750-8650	S-2404-CCT	4	5.45	4.90	4.09	3.50
750-8652	S-2406-CCT	6	5.90	5.31	4.43	3.79
750-8654	S-2408-CCT	8	5.97	5.37	4.48	3.84
750-8656	S-2410-CCT	10	7.71	6.94	5.78	4.96
750-8658	S-2412-CCT	12	8.16	7.35	6.12	5.25

For Fast, Dependable Service, Make Just One Call — 1-800-433-5700

ALLIED ► 465