

Aluminum Capacitors SMD (Chip), High Temperature


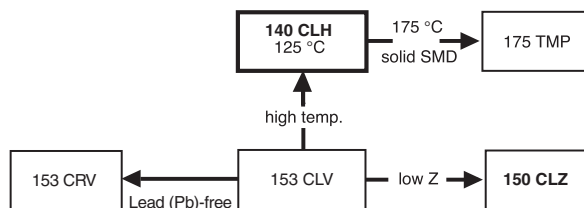


Fig.1 Component outline.


FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte, self healing
- SMD-version with base plate, reflow solderable
- High temperature, 1500 hours at 125 °C
- High capacitance values
- Charge and discharge proof, no peak current limitation
- Lead (Pb)-free terminations available
- ATTENTION: for maximum safe soldering conditions refer to fig.4

APPLICATIONS

- SMD technology, for high mounting density
- Industrial and professional applications
- Automotive, general industrial
- Smoothing, filtering, buffering.

MARKING

- Rated capacitance (in μF).
- Rated voltage (in V).
- Date code, in accordance with IEC 60062.
- Black mark or '–' sign indicating the cathode (the anode is identified by bevelled edges).
- Code indicating group number (H).

PACKAGING

Supplied in blister tape on reel.

QUICK REFERENCE DATA	
DESCRIPTION	VALUE
Nominal case sizes (L x W x H in mm)	8 x 8 x 10 to 10 x 10 x 14
Rated capacitance range, C_R	10 to 680 μF
Tolerance on C_R	$\pm 20\%$
Rated voltage range, U_R	6.3 to 63 V
Category temperature range	-55 to +125 °C
Endurance test at 125 °C	1 000 hours
Useful life at 125 °C	1 500 hours
Useful life at 40 °C; 1.8 x I_R applied	150 000 hours
Shelf life at 0 V, 125 °C	1 000 hours
Based on sectional specification	IEC 60384-18/CECC 32300
Climatic category IEC 60068	55/125/56

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES (L x W x H in mm)							
C_R (μF)	U_R (V)						
	6.3	10	16	25	35	50	63
10	–	–	–	–	–	–	8 x 8 x 10
22	–	–	–	–	–	–	8 x 8 x 10
33	–	–	–	–	–	–	8 x 8 x 10
47	–	–	–	–	–	8 x 8 x 10	10 x 10 x 10
68	–	–	–	–	8 x 8 x 10	10 x 10 x 10	10 x 10 x 14
100	–	–	–	8 x 8 x 10	10 x 10 x 10	10 x 10 x 14	–
150	–	–	8 x 8 x 10	–	10 x 10 x 14	–	–
220	–	8 x 8 x 10	–	10 x 10 x 10	–	–	–
330	8 x 8 x 10	10 x 10 x 10	10 x 10 x 14	–	–	–	–
470	10 x 10 x 10	10 x 10 x 14	–	–	–	–	–
680	10 x 10 x 14	–	–	–	–	–	–

Table 1

DIMENSIONS in millimeters AND MASS									
NOMINAL CASE SIZE L × W × H	CASE CODE	L _{max}	W _{max}	H _{max}	∅D	B _{max}	S	L _{1 max}	MASS (g)
8 × 8 × 10	0810	8.5	8.5	10.5	8.0	1.0	3.1	9.9	≈1.0
10 × 10 × 10	1010	10.5	10.5	10.5	10.0	1.0	4.5	11.8	≈1.3
10 × 10 × 14	1014	10.5	10.5	14.3	10.0	1.0	4.5	11.8	≈1.5

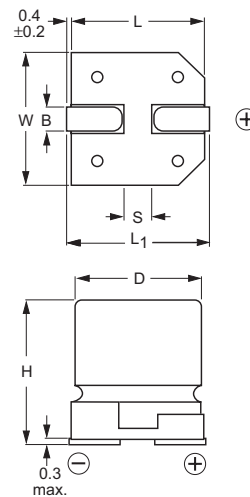


Table 2

TAPE AND REEL DIMENSIONS in millimeters, PACKAGING QUANTITIES						
NOMINAL CASE SIZE L × W × H	CASE CODE	PITCH P ₁	TAPE WIDTH W	TAPE THICKNESS T ₂	REEL DIA.	PACKAGING QUANTITY PER REEL
8 × 8 × 10	0810	16	24	11.3	380	500
10 × 10 × 10	1010	16	24	11.3	380	500
10 × 10 × 14	1014	16	24	14.8	330	250

Note

1. Detailed tape dimensions see section "PACKAGING".

MOUNTING

The capacitors are designed for automatic placement on to printed-circuit boards.

Optimum dimensions of soldering pads depend amongst others on soldering method, mounting accuracy, print lay-out and/or adjacent components.

For recommended soldering pad dimensions, refer to Fig.3 and Table 3.

SOLDERING

Soldering conditions are defined by the curve, temperature versus time, where the temperature is that measured on the soldering pad during processing.

For maximum conditions refer to Fig.4.

Any temperature versus time curve which does not exceed the specified maximum curves may be applied.

Table 3

RECOMMENDED SOLDERING PAD DIMENSIONS in millimeters			
CASE CODE	a	b	c
0810	3.5	2.5	3.0
1010	4.3	2.5	4.0
1014	4.3	2.5	4.0

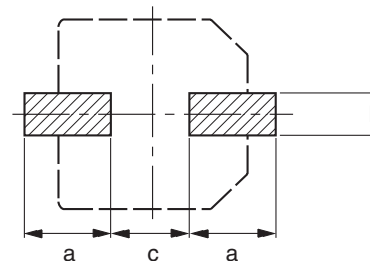


Fig.3 Recommended soldering pad dimensions.

AS A GENERAL PRINCIPLE, TEMPERATURE AND DURATION SHALL BE THE **MINIMUM** NECESSARY TO ENSURE GOOD SOLDERING CONNECTIONS. HOWEVER, THE SPECIFIED MAXIMUM CURVES SHOULD NEVER BE EXCEEDED.

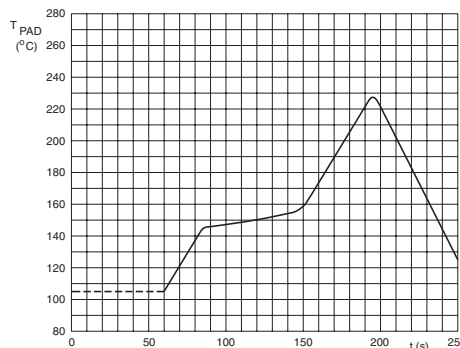


Fig.4 Maximum temperature load during infrared reflow soldering measured on the soldering pad.



ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	rated RMS ripple current at 100 kHz, 125 °C
I_{L2}	max. leakage current after 2 minutes at U_R
Tan δ	max. dissipation factor at 100 Hz
Z	max. impedance at 100 kHz

Note

1. Unless otherwise specified, all electrical values in Table 4 apply at Tamb = 20 °C, P = 86 to 106 kPa, RH = 45 to 75%.

ORDERING EXAMPLE*

Electrolytic capacitor 140 CLH series

100 μ F/50 V; $\pm 20\%$

Nominal case size:

10 × 10 × 14 mm; taped on reel

Catalog number: 2222 140 95102.


* To ensure delivery of lead (Pb)-free parts during the transition period, please contact your Vishay sales agent.

Table 4

ELECTRICAL DATA AND ORDERING INFORMATION							
U_R (V)	C_R (μ F)	NOMINAL CASE SIZE L × W × H (mm)	I_R 100 kHz 125 °C (mA)	I_{L2} 2 min (μ A)	Tan δ	Z 100 kHz +20 °C (Ω)	CATALOG NUMBER 2222 140
6.3	330	8 × 8 × 10	180	21	0.30	0.65	95303
	470	10 × 10 × 10	300	30	0.30	0.17	95301
	680	10 × 10 × 14	430	43	0.30	0.12	95302
10	220	8 × 8 × 10	180	22	0.26	0.65	95403
	330	10 × 10 × 10	300	33	0.26	0.17	95401
	470	10 × 10 × 14	430	47	0.26	0.12	95402
16	150	8 × 8 × 10	180	24	0.22	0.65	95502
	330	10 × 10 × 14	430	53	0.22	0.12	95501
25	100	8 × 8 × 10	180	25	0.18	0.65	95602
	220	10 × 10 × 10	300	55	0.18	0.19	95601
35	68	8 × 8 × 10	180	24	0.14	0.65	95003
	100	10 × 10 × 10	255	35	0.14	0.40	95001
	150	10 × 10 × 14	317	53	0.14	0.30	95002
50	47	8 × 8 × 10	145	24	0.12	1.00	95103
	68	10 × 10 × 10	205	34	0.12	0.56	95101
	100	10 × 10 × 14	255	50	0.12	0.42	95102
63	10	8 × 8 × 10	145	6.3	0.12	1.00	95805
	22	8 × 8 × 10	145	14	0.12	1.00	95803
	33	8 × 8 × 10	145	21	0.12	1.00	95804
	47	10 × 10 × 10	205	30	0.12	0.56	95801
	68	10 × 10 × 14	255	43	0.12	0.42	95802

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage for short periods	IEC 60384-18, subclause 4.14	$U_s \leq 1.15 \times U_R$
Reverse voltage for short periods	IEC 60384-18, subclause 4.16	$U_{rev} \leq 0.5 V$
Current		
Leakage current	after 2 minutes at U_R	$I_{L2} \leq 0.01 \times C_R \times U_R$
Inductance		
Equivalent series inductance (ESL)		typ. 16 nH
Resistance		
Equivalent series resistance (ESR) at 100 Hz	calculated from tan δ_{max} and C_R (see Table 4)	$ESR = \tan \delta / 2\pi f C_R$


CAPACITANCE (C)

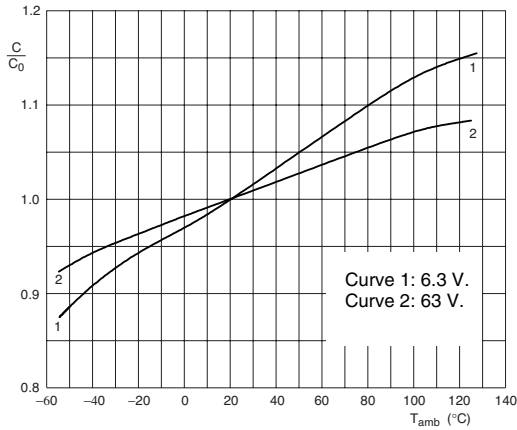

C_0 = capacitance at 20 °C, 100 Hz.

Fig.5 Typical multiplier of capacitance as a function of ambient temperature.


DISSIPATION FACTOR ($\tan \delta$)

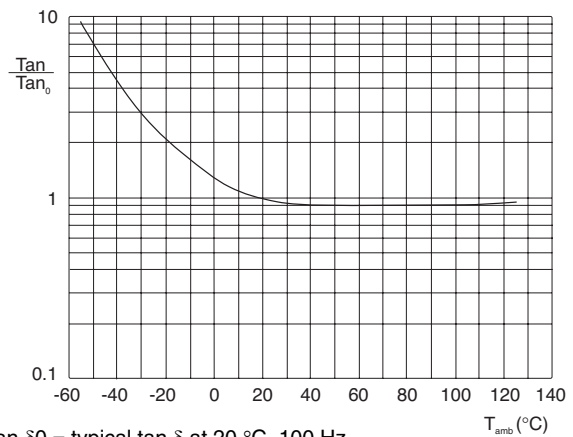

$\tan \delta_0$ = typical $\tan \delta$ at 20 °C, 100 Hz.

Fig.6 Multiplier of dissipation factor ($\tan \delta$) as a function of ambient temperature.

EQUIVALENT SERIES RESISTANCE (ESR)

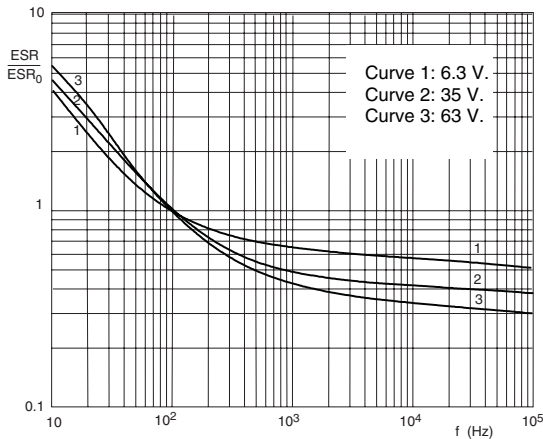

ESR_0 = typical ESR at 20 °C, 100 Hz. $T_{amb} = 20$ °C.

Fig.7 Typical multiplier of ESR as a function of frequency.

IMPEDANCE (Z)

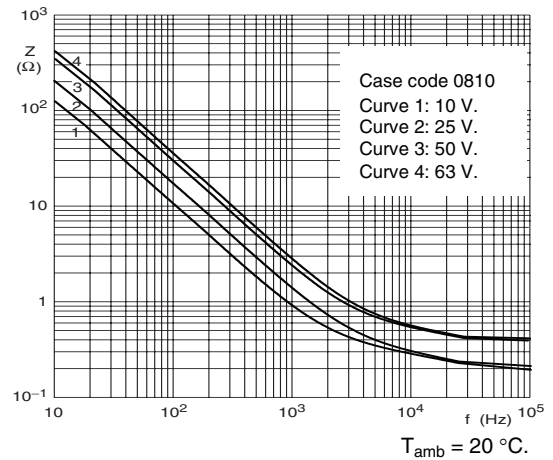


Fig.8 Typical impedance as a function of frequency.

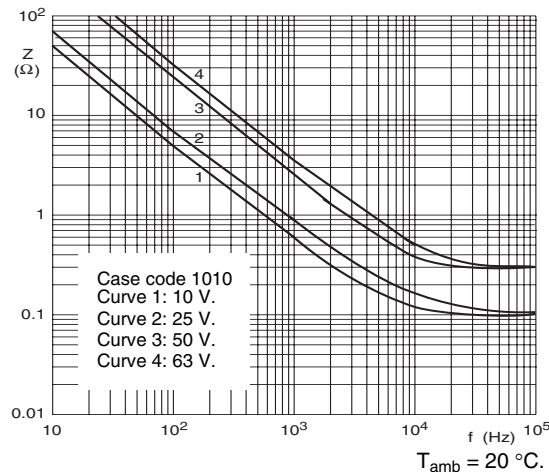


Fig.9 Typical impedance as a function of frequency.

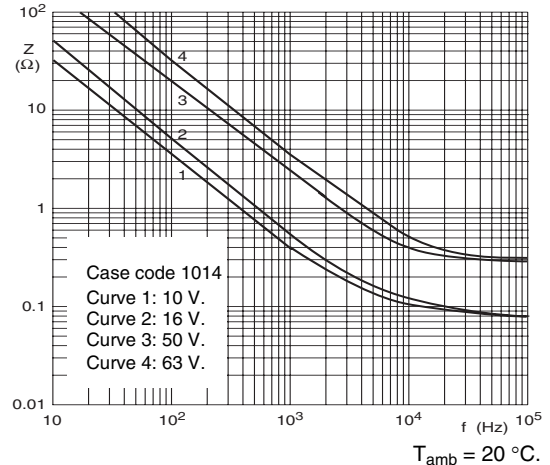


Fig.10 Typical impedance as a function of frequency.



RIPPLE CURRENT AND USEFUL LIFE

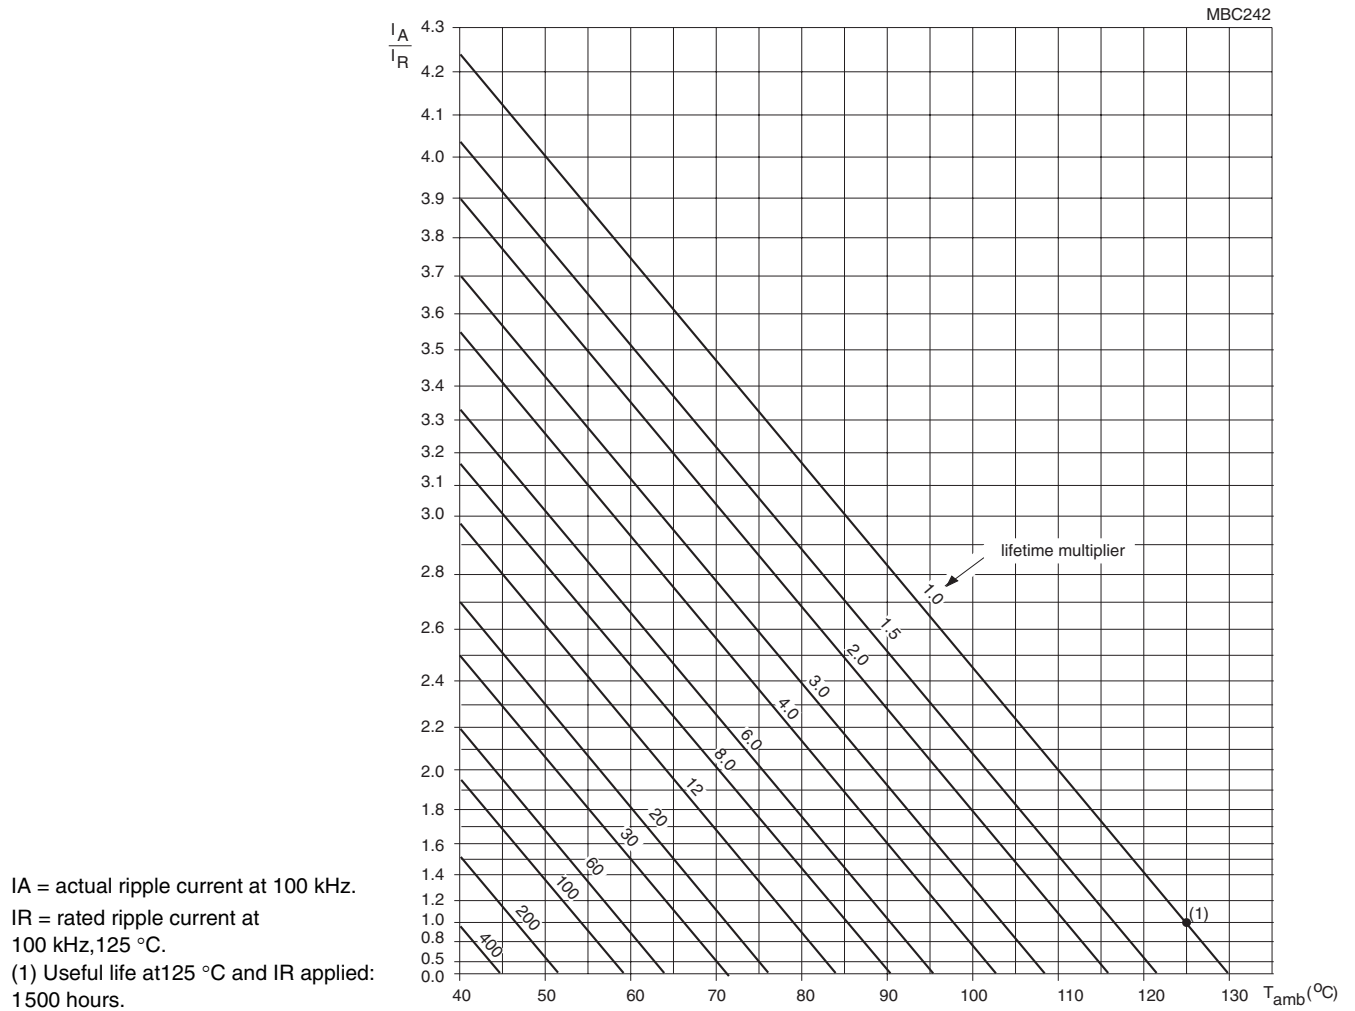


Fig.11 Multiplier of useful life as a function of ambient temperature and ripple current load.

Table 5

MULTIPLIER OF RIPPLE CURRENT (I _R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I _R MULTIPLIER		
	U _R = 6.3 to 25 V	U _R = 35 and 50 V	U _R = 63 V
50	0.60	0.45	0.40
100	0.70	0.60	0.55
300	0.80	0.75	0.70
1000	0.85	0.85	0.85
3000	0.90	0.90	0.90
10000	0.95	0.95	0.95
30000	0.97	0.97	0.97
100000	1.00	1.00	1.00

Table 6

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Mounting	IEC 60384-18, subclause 4.3	shall be performed prior to tests mentioned below; reflow soldering; for maximum temperature load refer to chapter "Mounting"	$\Delta C/C: \pm 5\%$ $\tan \delta \leq \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$
Endurance	IEC 60384-18/ CECC 32 300, subclause 4.15	$T_{\text{amb}} = 125\text{ }^{\circ}\text{C}$; U_R applied; 1000 hours	$U_R = 6.3\text{ V}$; $\Delta C/C: \pm 25\%$ $U_R \geq 10\text{ V}$; $\Delta C/C: \pm 20\%$ $\tan \delta \leq 2 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$
Useful life	CECC 30301, subclause 1.8.1	$T_{\text{amb}} = 125\text{ }^{\circ}\text{C}$; U_R and I_R applied; 1500 hours	$\Delta C/C: \pm 50\%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 1\%$
Shelf life (storage at high temperature)	IEC 60384-18/ CECC 32 300, subclause 4.17	$T_{\text{amb}} = 125\text{ }^{\circ}\text{C}$; no voltage applied; 1000 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	for requirements see 'Endurance test' above
Reverse voltage	IEC 60384-18/ CECC 32 300, subclause 4.16	$T_{\text{amb}} = 125\text{ }^{\circ}\text{C}$: 125 hours at $U = -0.5\text{ V}$, followed by 125 hours at U_R	$\Delta C/C: \pm 15\%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.