

Solid Aluminum Capacitors with Organic Semiconductor Electrolyte




Fig.1 Component outline

FEATURES

- High capacitance
- Miniaturized
- 94SA capacitors are suitable for high frequency switching power supplies, etc


RoHS
COMPLIANT

PART MARKING

 Sleeve color: Blue. Marking: White

- Polarity -
- Rated voltage
- Capacitance
- Vishay OS-CON
- Lot number
- Maximum operating temperature (+ 105 °C)

QUICK REFERENCE DATA

DESCRIPTION	VALUE		
Operating temperature Range	- 55 °C to + 105 °C		
Capacitance tolerance at 120 Hz	X0 = ± 20 %		
Tangent of loss angle (tan δ) at 120 Hz	≤ values in standard ratings table		
Leakage current (μA/2 minutes)(or less) ⁽¹⁾	0.02 CV (0.04 CV for G, H size)		
Equivalent series resistance (Ω), (100 k to 300 kHz)	≤ values in standard ratings table		
Temperature characteristics at high temp. and low temp. Impedance ratio at 100 kHz	- 55 °C	Z/Z _{20 °C}	1.0 to 1.25
	+ 105 °C	Z/Z _{20 °C}	0.75 to 1.0
High temperature load (+ 105 °C, 2000 hours) (Ø D ≥ 12.5, 1000 hours) Rated voltage applied	ΔC/C	within ± 20 % of the initial value	
	tan δ	≤ 1.5 x the value of tangent of loss angle	
	leakage Current	≤ the value of leakage current	
Moisture resistance (+ 60 °C, 90 to 95 % RH, 1000 hours, no voltage)	ΔC/C	within ± 10 % of the initial value	
	tan δ	≤ 1.5 x the value of tangent of Loss Angle	
	leakage Current	≤ the value of leakage current	
Reverse voltage guarantee	temporary: < 20 % of the rated voltage continuous: < 10 % of the rated voltage		


Note ⁽¹⁾ If any doubt arises, measure the current after applying voltage (voltage treatment) for 30 minutes at + 105 °C.
The rated voltage should be for all WV.

TEMPERATURE COEFFICIENT RIPPLE CURRENT


AMBIENT TEMPERATURE	COEFFICIENT
~ + 45 °C	1.0
+ 85 °C	0.7
+ 95 °C	0.4
+ 105 °C	0.25

DIMENSIONS in inches [millimeters]

CASE CODE	NOMINAL CASE SIZE Ø D x L	F	Ø d	G (max.)	K (max.)
C	0.248 x 0.268 [6.3 x 6.8]	0.098 ± 0.020 [2.5 ± 0.5]	0.018 [0.45]	0.020 [0.5]	0.020 [0.5]
D	0.248 x 0.386 [6.3 x 9.8]	0.098 ± 0.020 [2.5 ± 0.5]	0.024 [0.60]	0.020 [0.5]	0.020 [0.5]
E	0.315 x 0.413 [8.0 x 10.5]	0.138 ± 0.020 [3.5 ± 0.5]	0.024 [0.60]	0.031 [0.8]	0.031 [0.8]
F	0.394 x 0.413 [10.0 x 10.5]	0.197 ± 0.020 [5.0 ± 0.5]	0.024 [0.60]	0.031 [0.8]	0.031 [0.8]
G	0.492 ± 0.866 [12.5 ± 22.0]	0.197 ± 0.040 [5.0 ± 1.0]	0.031 [0.80]	0.031 [0.8]	0.031 [0.8]
H	0.630 ± 0.984 [16.0 ± 25.0]	0.295 ± 0.040 [7.5 ± 1.0]	0.031 [0.80]	0.031 [0.8]	0.031 [0.8]

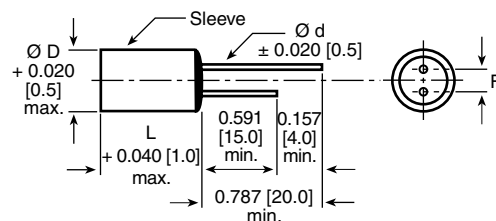DIMENSIONS in inches [millimeters]

Standards of lead position



C = The middle point of A-A'

CASE CODE LIST

WV ⁽¹⁾	(SV) ⁽²⁾	6.3	6.3	6.3	6.3
CAPACITANCE (μ F)		(7.2)	(7.2)	(7.2)	(7.2)
15.0	-	-	-	-	-
22.0	-	-	-	-	-
33.0	-	-	-	-	-
47.0	C	C	C	C	C
68.0	-	-	-	-	-
100.0	-	-	-	-	-
150.0	E	E	E	E	E
220.0	-	-	-	-	-
330.0	F	F	F	F	F
470.0	-	-	-	-	-
1000.0	-	-	-	-	-
2200.0	H	H	H	H	H

NotesWV ⁽¹⁾ = Rated Voltage.(SV) ⁽²⁾ = Surge Voltage (at room temperature)**STANDARD RATINGS**

CASE CODE	PART NUMBER ⁽¹⁾	RATED VOLTAGE (V)	NOMINAL CAPACITANCE (μ F)	MAX. ALLOWABLE RIPPLE CURRENT (mA) at 100 kHz, + 45 °C	MAX. LEAKAGE CURRENT (μ A) (after 2 min)	MAX. TANGENT OF LOSS ANGLE	MAX. ESR 100 k to 300 kHz (m Ω)
C	94SA156X0020CBP	20.0	15.0	1200	6.00	0.06	90
	94SA226X0020CBP	20.0	22.0	1300	8.80	0.06	70
	94SA336X0016CBP	16.0	33.0	1370	10.56	0.06	70
	94SA476X06R3CBP	6.3	47.0	1430	5.92	0.07	60
D	94SA336X0020DBP	20.0	33.0	1710	13.20	0.06	70
	94SA476X0016DBP	16.0	47.0	1830	15.04	0.06	60
	94SA686X0010DBP	10.0	68.0	2000	13.60	0.07	50
E	94SA476X0020EBP	20.0	47.0	2450	18.80	0.06	40
	94SA686X0020EBP	20.0	68.0	2600	27.20	0.06	36
	94SA107X0016EBP	16.0	100.0	2740	32.00	0.06	30
	94SA157X06R3EBP	6.3	150.0	2780	18.90	0.07	30
F	94SA107X0020FBP	20.0	100.0	3210	40.00	0.06	30
	94SA157X0016FBP	16.0	150.0	3260	48.00	0.06	28
	94SA227X0010FBP	10.0	220.0	3370	44.00	0.07	27
	94SA337X06R3FBP	6.3	330.0	3500	41.58	0.07	25
G	94SA477X0016GBP	16.0	470.0	6080	300.80	0.08	20
H	94SA108X0016HBP	16.0	1000.0	9750	640.00	0.09	15
	94SA228X06R3HBP	6.3	2200.0	9750	554.40	0.13	15

Note ⁽¹⁾ Part Numbers shown are for $\pm 20\%$ capacitance tolerance (X0).

94SA156X0020... Part Number is complete with Case Code and 2 character Package or Process Code. BP as shown indicates Bulk Pack.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.