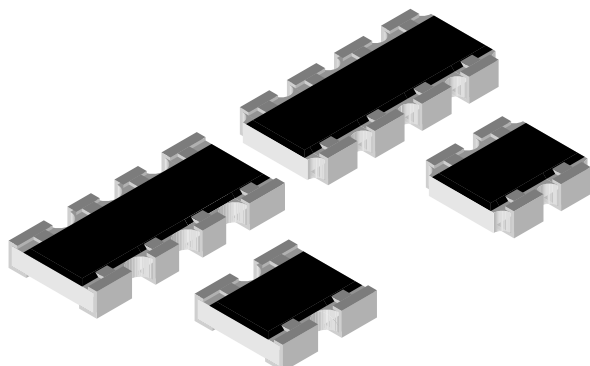


CRA06E and S

Vishay Dale

**Thick Film, Resistor Array****FEATURES**

- 4, 8 and 10 terminal package
- Single component reduces board space and component counts
- Wrap around termination
- Inner electrode protection
- Flow & Reflow solderable
- Automatic placement capability
- Consult factory for additional schematics, values, etc

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	POWER RATING $P_{70^{\circ}\text{C}}$ W	CIRCUIT	LIMITING ELEMENT VOLTAGE MAX. V_{\cong}	TEMPERATURE COEFFICIENT ppm/ $^{\circ}\text{C}$	TOLERANCE %	RESISTANCE RANGE Ω	E-SERIES
CRA06E & S	0.0625	03	50	200	1, 2, 5	10R-1M0	24-96
Jumper: Zero-Ohm-Resistor on Request							

- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material
- Operating temperature Range: - 55 $^{\circ}\text{C}$ to + 150 $^{\circ}\text{C}$
- Ask about further value ranges
- Packaging: according to EIA 481

DataSheet4U.com

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	CRA06E & S 03 CIRCUIT
Rated Dissipation at 70 $^{\circ}\text{C}$	W	0.0625
Limiting Element Voltage ¹⁾	V_{\cong}	50
Insulation Voltage (1min)	$V_{\text{dc/ac peak}}$	100
Category Temperature Range	$^{\circ}\text{C}$	- 55 / + 150
Insulation Resistance	Ω	> 10 ¹⁰

¹⁾Rated voltage: $\sqrt{P \times R}$ **ORDERING INFORMATION**

CRA06S	08	03	473	J	RT1
MODEL	TERMINAL COUNT	CIRCUIT TYPE	R-VALUE Ω	TOLERANCE \pm %	PACKAGING
CRA06S	04, 08, 10	03	First two digits (three for 1%) are significant. Last digit is the multiplier	F = \pm 1% G = \pm 2% J = \pm 5% Z = 0 Ω Jumper	Papertape 5000pcs
CRA06E	08	03	473 = 47K 4702 = 47K 100 = 10 Ω 10R0 = 10 Ω 000 = 0 Ω Jumper		

DataSheet4U.com

www.DataSheet4U.com




Thick Film, Resistor Array

CRA06E and S


Vishay Dale

8-Terminal device

S - Version

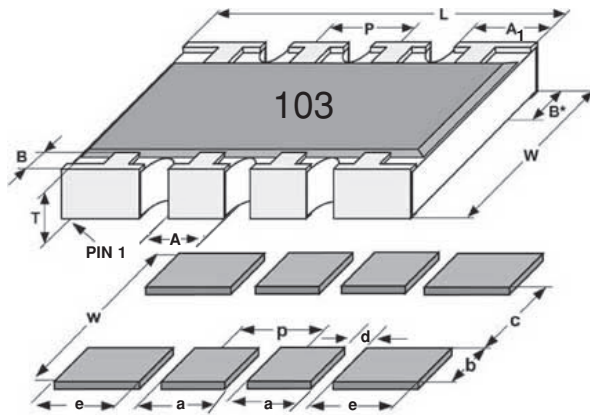

E - Version

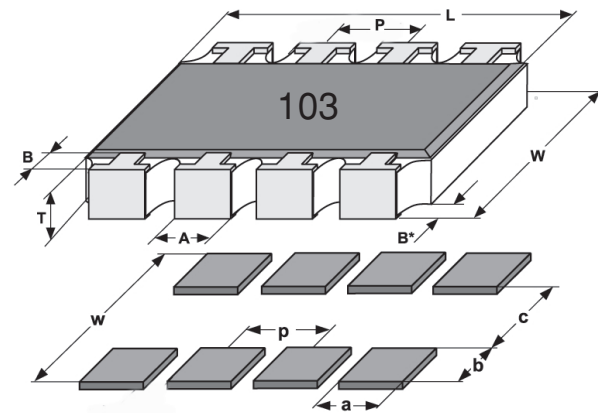


PIN NO#	DIMENSIONS [in millimeters]						
	L	A	B	B*	P	T	W
4	1.6	0.38	0.3	0.3	0.8	0.4	1.5
8	3.2	0.38	0.3	0.3	0.8	0.4	1.5
10	3.2	0.34	0.3	0.2	0.64	0.5	1.6
Tol	± 0.15	± 0.15	± 0.15	± 0.15	± 0.1	± 0.05	± 0.15

S-Version: $A_1 = 0.61 \pm 0.15$, 8 pin and 4 pin, $A_1 = 0.49 \pm 0.15$ for 10 pin


MODEL	PINS	SOLDER PAD DIMENSIONS [in millimeters]						
		c	w	d	p	a	b	e
CRA06S	4	0.8	3.1	0.36		0.44	1.15	
CRA06E + S	8	0.8	3.1	0.36	0.8	0.44	1.15	0.63
CRA06S	10	0.8	3.1	0.30	0.64	0.34	1.15	0.45

CIRCUIT SCHEMATIC

03 CIRCUIT



(CRA06S only)

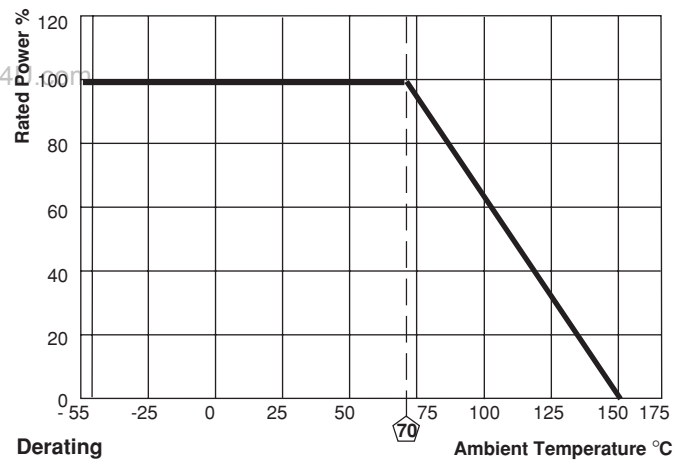

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST RESULTS
Endurance Test at 70°C per EIA 575	1000 hour at 70°C, 1.5 hours "ON", 0.5 hours "OFF"	±1.0%
Overload per EIA 575	Short time overload 2.5 x rated continuous working voltage for 5 seconds. Not to exceed 2 x max operating voltage	± 0.5%
Thermal Shock	per EIA 575-3.5	± 0.5%
Moisture Resistance	per EIA 575-3.10	± 1.0%
Resistance to Soldering Heat EIA 575	10 seconds at 260°C solder bath temperature	± 2.0%
High Temperature Exposure	per EIA 575-3.7	± 1.0%
Low Temperature Operations	per EIA-575-3.6	± 0.5%
Solderability & Leaching	EIA 575-3.12	95% Coverage

