


# DC Filter Capacitors

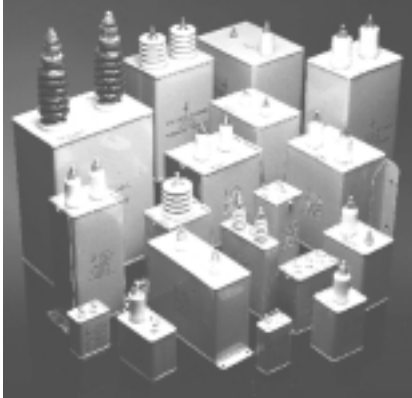

## TYPE ER

Capacitors offer unusually good electrical characteristics, coupled with very small size.

The ER range of capacitors are manufactured using a mixed dielectric material that consists of polyester/polypropylene. The container is a rolled seamed tinplate case that is hermetically sealed. The construction is designed to prevent internal movement when subjected to shock and vibration.

Note: The impregnant used is a non toxic highly refined, purified and inhibited mineral oil.

## APPLICATIONS

The ER range of capacitors are specifically designed for DC applications.

- Audio coupling
- Pulse forming networks
- Oscillator circuits
- Arc and spark suppression
- RF by-pass
- Tuned filters
- Energy storage
- Integrating circuits
- Low and high pass filters
- High voltage smoothing

Capacitors required for AC applications and High Discharge rates can also be designed from the ER range.

Consult Vishay Electronic GmbH, Division Roederstein ESTA and Hybrids for your specific requirements.

## TEMPERATURE RANGE

Temperature range is  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . The nominal voltage rating is applicable from  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . Derating is required for higher operating temperatures.

## TEMPERATURE COEFFICIENT

Capacitance will increase by 2% per  $100^{\circ}\text{C}$  temperature change.

## RIPPLE

The sum of the peak ripple voltage and the DC voltage should not exceed the rated voltage. Refer to graph fig 1 for permissible peak-to-peak ripple voltage as a percentage of rated voltage for various frequencies.

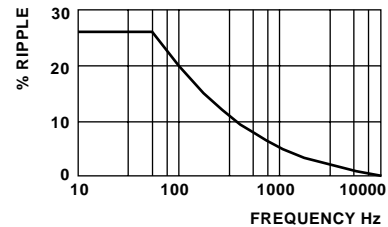


FIG 1

## POWER FACTOR

The power factor is variable, and a function of temperature and frequency. See fig 2. Nominal value  $<0.5\%$  at  $20^{\circ}\text{C}$ .

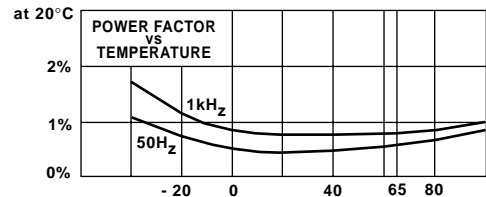


FIG 2

## DIELECTRIC RESISTANCE

(Parallel resistance) is indicated by the graph of insulance ( $\text{M}\Omega \times \mu\text{F}$ ) vs temperature fig 3. The insulance ( $\text{M}\Omega \times \mu\text{F}$ ) is nominally 10000s at  $+20^{\circ}\text{C}$ . (Measurements taken after 1 minute with an applied voltage of 500V).

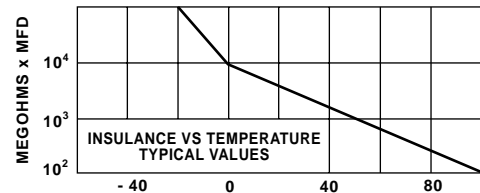


FIG 3

## LIFE EXPECTANCY

ER type capacitors are designed for a life expectancy of 50000 hours at  $65^{\circ}\text{C}$ . To achieve the same life expectancy at  $85^{\circ}\text{C}$  derate to 60% of rated voltage fig 4.

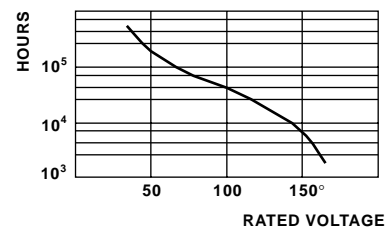


FIG 4

## WEIGHT

The approximate weight in kg of capacitors in the ER range can be estimated by multiplying the volume of the capacitor container by  $1.45 \times 10^{-6}$ .



**CAPACITANCE RANGE**

0.01µF-100µF. The tolerance is ± 10%. Other tolerances are available on request. Nominal values measured at 1kHz.

**VOLTAGE RANGE**

1000VDC-40kVDC other values on request.

**TEST VOLTAGE**

Terminal/terminal (Vt/t)  
 For DC rating < 20kV  
 Vt/t = 2.0 x rated voltage 60s  
 For DC rating > 20kV  
 Vt/t = 1.5 x rated voltage 60s

**TERMINATIONS**

Add suffix W to part No. To indicate wire terminations.

**CAPACITANCE**



Capacitance tolerance of 20% is standard with those marked \*.

**FLASHOVER**

Up to 5000 volts rating, the capacitor terminals will withstand 125% of the rated voltage without flashover at a pressure of 85mm Hg., equivalent to 50,000 feet altitude. Above 5000 volts rating, the capacitor terminals will withstand 125% of the rated voltage at a pressure of 500mg Hg, equivalent to 10,000 feet altitude.

**LIFE TESTS**

Conducted at 85°C for 500 hours. The voltage applied will be 140% of the rated voltage.



L = B + 36  
 K = L - 25  
 SLOT WIDTH 6.35  
 SLOT LENGTH 12.7

PART NUMBER	CAP. µF	A	B	C	D	E
<b>1000VDC WKG</b>						
ER10-104	0.1	50	48	28	20	20
ER10-504	0.5	50	48	28	20	20
ER10-105	1.0	75	48	28	20	20
ER10-405	4.0	75	60	54	25	35
ER10-605	6.0	95	60	54	25	35
ER10-106	10.0	115	80	48	40	35
ER10-256	25.0	155	85	67	40	35
ER10-506	50.0	155	130	100	50	35
<b>1500VDC WKG</b>						
ER15-104	0.1	60	48	28	20	20
ER15-504	0.5	60	48	28	20	20
ER15-205	2.0	75	54	48	22	35
ER15-405	4.0	115	54	48	22	35
ER15-805	8.0	95	85	67	40	35
ER15-106	10.0	115	85	67	40	35
ER15-126	12.0	135	85	67	40	35
ER15-256	25.0	115	130	100	50	35
ER15-506	50.0	180	130	100	50	35
<b>2000VDC WKG</b>						
ER20-104	0.1	60	48	28	20	20
ER20-254	0.25	60	48	28	20	20
ER20-504	0.5	60	48	28	20	20
ER20-105	1.0	95	48	28	20	20
ER20-205	2.0	75	54	48	22	35
ER20-405	4.0	115	54	48	22	35
ER20-605	6.0	135	60	54	25	35
ER20-106	10.0	115	85	67	40	35
ER20-126	12.0	135	85	67	40	35
ER20-206	20.0	115	130	100	50	35
<b>3000VDC WKG</b>						
ER30-104	0.1	60	48	28	20	20
ER30-504	0.5	75	48	28	20	20
ER30-105	1.0	115	48	28	20	20
ER30-105X	1.0	75	54	48	22	35
ER30-205	2.0	115	54	48	22	35
ER30-405	4.0	155	60	54	25	35
ER30-605	6.0	180	80	48	40	35
ER30-805	8.0	155	85	67	40	35
ER30-106	10.0	95	130	100	50	35
ER30-206	20.0	155	130	100	50	35
ER30-256	25.0	180	130	100	50	35
ER30-506	50.0	345	130	100	50	35
<b>4000VDC WKG</b>						
ER40-104	0.1	60	48	28	20	20
ER40-254	0.25	75	48	28	20	20
ER40-504	0.5	95	48	28	20	20
ER40-105	1.0	95	54	48	22	35
ER40-205	2.0	135	54	48	22	35
ER40-405	4.0	115	85	67	40	35
ER40-805	8.0	115	130	100	50	35
ER40-106	10.0	135	130	100	50	35
ER40-206	20.0	230	130	100	50	35
ER40-306	30.0	320	130	100	50	35



PART NUMBER	CAP. $\mu$ F	A	B	C	D	E
<b>5000VDC WKG</b>						
ER50-104	0.1	60	48	28	20	20
ER50-254	0.25	75	48	28	20	20
ER50-105	1.0	115	54	48	22	35
ER50-405	4.0	155	85	67	40	35
ER50-805	8.0	135	130	100	50	35
ER50-106	10.0	155	130	100	50	35
ER50-206	20.0	290	130	100	50	35
ER50-506	50.0	295	180	180	75	35
<b>6000VDC WKG</b>						
ER60-104	0.1	65	54	48	*	35
ER60-254	0.25	80	54	48	*	35
ER60-504	0.5	100	80	48	40	35
ER60-105	1.0	100	85	67	40	35
ER60-205	2.0	100	130	100	50	35
ER60-405	4.0	135	130	100	50	35
ER60-605	6.0	180	130	100	50	35
ER60-805	8.0	250	130	100	50	35
ER60-106	10.0	290	130	100	50	35
ER60-126	12.0	345	130	100	50	35
ER60-206	20.0	180	220	164	125	60
<b>8000VDC WKG</b>						
ER80-503	0.05	58	60	54	*	60
ER80-104	0.1	65	60	54	*	60
ER80-254	0.25	85	60	54	*	60
ER80-504	0.5	140	60	54	*	60
ER80-105	1.0	120	85	67	40	60
ER80-205	2.0	120	130	100	50	60
ER80-405	4.0	200	130	100	50	60
ER80-605	6.0	270	130	100	50	60
ER80-805	8.0	345	130	100	50	60
ER80-156	15.0	280	180	180	75	60
<b>10KVDC WKG</b>						
ER100-503	0.05	58	80	48	40	60
ER100-104	0.1	65	80	48	54	60
ER100-504	0.5	140	80	48	40	60
ER100-105	1.0	160	85	67	40	60
ER100-205	2.0	140	130	100	50	60
ER100-405	4.0	260	130	100	50	60
ER100-605	6.0	350	130	100	50	60
ER100-805	8.0	300	190	120	75	60
ER100-156	15.0	350	180	180	75	60

**Dimensions in Millimetres**

\* These capacitors are fitted with one high voltage terminal and case terminal. An additional terminal for connection to case is available as an optional extra. Add suffix M to Part Number.

PART NUMBER	CAP. $\mu$ F	A	B	C	D	E
<b>12KVDC WKG</b>						
ER120-503	0.05	75	85	67	40	60
ER120-104	0.1	100	85	67	40	60
ER120-254	0.25	105	85	67	40	60
ER120-105	1.0	145	130	100	75	60
ER120-205	2.0	240	130	100	75	60
ER120-405	4.0	280	190	120	75	60
<b>15KVDC WKG</b>						
ER150-103	0.01	60	60	54	*	60
ER150-203	0.02	60	60	54	*	60
ER150-503	0.05	85	60	54	*	60
ER150-104	0.1	105	80	48	*	60
ER150-254	0.25	125	85	67	40	60
ER150-504	0.5	190	85	67	40	60
ER150-504X	0.5	105	130	100	75	60
ER150-105	1.0	160	130	100	75	60
ER150-205	2.0	190	159	120	75	60
<b>20KVDC WKG</b>						
ER200-103	0.01	70	80	48	*	60
ER200-503X	0.05	85	85	67	40	60
ER200-104	0.1	105	85	67	40	60
ER200-254	0.25	190	85	67	40	60
ER200-504	0.5	160	130	100	75	60
ER200-105	1.0	300	130	100	75	60
ER200-205	2.0	250	180	180	90	100
ER200-405	4.0	305	240	180	100	100
<b>25KVDC WKG</b>						
ER250-503	0.05	110	85	67	*	70
ER250-104X	0.1	95	130	100	65	70
ER250-254	0.25	130	130	100	65	70
ER250-504	0.5	250	130	100	65	70
<b>30KVDC WKG</b>						
ER300-303	0.03	120	85	67	*	70
ER300-104	0.1	200	85	67	*	70
ER300-104X	0.1	120	130	100	65	70
ER300-504	0.5	315	130	100	65	70
ER300-105	1.0	295	180	180	75	100
<b>40KVDC WKG</b>						
ER400-303	0.03	160	85	67	*	70
ER400-503	0.05	210	85	67	*	70
ER400-503X	0.05	125	130	100	65	70



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.