




Surface Mount, Molded, Shielded Inductor



FEATURES

- Molded construction provides superior strength and moisture resistance.
- Tape and reel packaging for automatic handling, 2000/ reel, EIA 481.
- Compatible with vapor phase, infrared and wave soldering methods.
- Shielded construction minimizes coupling to other components.

ELECTRICAL SPECIFICATIONS


**Inductance Range:** .01μH to 100μH.  
**Inductance Tolerance:** ± 20% for 0.01μH to 0.82μH. ± 10% for 1.0μH to 100μH standard. 2%, 3% and 5% (also 1% on some values) tolerances available.  
**Temperature Range:** - 55°C to + 125°C.  
**Coilform Material:** Non-magnetic for 0.01μH to 0.10μH. Powdered Iron for 0.12μH to 100μH.

TEST EQUIPMENT

- H/P 4342A Q meter with Vishay Dale test fixture or equivalent.
- H/P 4191A RF Impedance Analyzer (for SRF measurements).
- Wheatstone Bridge.

STANDARD ELECTRICAL SPECIFICATIONS						
IND. (μH)	TOL.	Q MIN.	TEST FREQ. L & Q (MHz)	SELF-RESONANT FREQ. MIN. (MHz)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)
0.010	±20%	50	50	1000	0.10	810
0.012	±20%	50	50	1000	0.11	750
0.015	±20%	50	50	1000	0.12	720
0.018	±20%	50	50	1000	0.13	690
0.022	±20%	45	50	1000	0.15	640
0.027	±20%	45	50	1000	0.17	610
0.033	±20%	45	50	1000	0.18	585
0.039	±20%	40	50	1000	0.24	530
0.047	±20%	40	50	1000	0.26	495
0.056	±20%	40	50	1000	0.28	485
0.068	±20%	40	50	1000	0.35	475
0.082	±20%	38	50	900	0.45	460
0.10	±20%	36	50	700	0.50	450
0.12	±20%	40	25.2	500	0.20	630
0.15	±20%	40	25.2	470	0.20	600
0.18	±20%	40	25.2	400	0.24	580
0.22	±20%	40	25.2	330	0.30	565
0.27	±20%	40	25.2	310	0.33	500
0.33	±20%	40	25.2	280	0.36	475
0.39	±20%	40	25.2	230	0.40	465
0.47	±20%	40	25.2	220	0.44	460
0.56	±20%	40	25.2	200	0.46	455
0.68	±20%	40	25.2	180	0.48	450
0.82	±20%	40	25.2	160	0.50	450
1.0	±10%	30	7.96	120	0.60	400
1.2	±10%	30	7.96	110	0.65	390
1.5	±10%	30	7.96	90.0	0.75	370
1.8	±10%	30	7.96	85.0	0.85	350
2.2	±10%	30	7.96	65.0	0.90	320
2.7	±10%	30	7.96	60.0	1.00	290
3.3	±10%	30	7.96	60.0	1.10	270
3.9	±10%	30	7.96	58.0	1.20	250
4.7	±10%	30	7.96	52.0	1.25	220
5.6	±10%	30	7.96	50.0	1.40	210
6.8	±10%	30	7.96	40.0	1.60	205
8.2	±10%	30	7.96	35.0	1.65	195
10.0	±10%	30	2.52	30.0	2.00	185
12.0	±10%	30	2.52	24.0	2.30	175
15.0	±10%	30	2.52	20.0	2.50	165
18.0	±10%	30	2.52	17.0	2.70	155
22.0	±10%	30	2.52	16.0	3.10	150
27.0	±10%	30	2.52	14.5	3.30	125
33.0	±10%	30	2.52	14.5	5.10	115
39.0	±10%	30	2.52	14.0	5.90	105
47.0	±10%	30	2.52	13.0	8.00	100
56.0	±10%	30	2.52	11.5	10.0	95
68.0	±10%	30	2.52	11.0	10.0	90
82.0	±10%	30	2.52	11.0	11.0	85
100.0	±10%	30	0.796	6.0	12.0	80

DIMENSIONS in inches [millimeters]

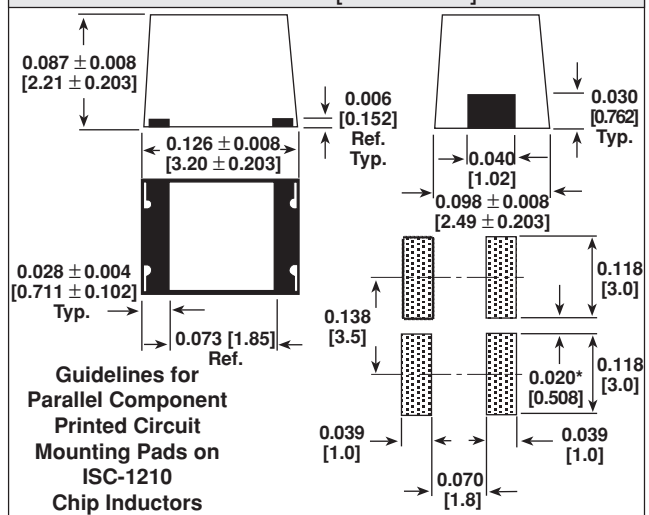

\*Recommended minimum spacing between components.


PART MARKING

- Dale
- Inductance value
- Date code

DESCRIPTION

ISC-1210	10μH	± 10%
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE

SAP PART NUMBERING GUIDELINES (INTERNAL)



See the end of this data book for conversion tables