

P-Channel 30-V (D-S) MOSFET

PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
–30	0.055 @ V_{GS} = –10 V	±5.1
	0.07 @ V_{GS} = –6 V	±4.6
	0.105 @ V_{GS} = –4.5 V	±3.6

SO-8



Top View

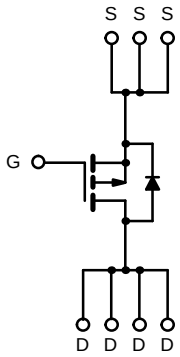

P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C UNLESS OTHERWISE NOTED)				
Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	–30	V
Gate-Source Voltage		V_{GS}	±20	
Continuous Drain Current (T_J = 150°C)[a]	T_A = 25°C	I_D	±5.1	A
	T_A = 70°C		±4.6	
Pulsed Drain Current		I_{DM}	±20	
Continuous Source Current (Diode Conduction)[a]		I_S	–2.6	
Maximum Power Dissipation[a]	T_A = 25°C	P_D	2.5	W
	T_A = 70°C		1.6	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	–55 to 150	°C

THERMAL RESISTANCE RATINGS			
Parameter	Symbol	Limit	Unit
Maximum Junction-to-Ambient[a]	R_{thJA}	50	°C/W

Notes
a. Surface Mounted on FR4 Board, t ≤ 10 sec.

For SPICE model information via the Worldwide Web: http://www.vishay.com/www/product/spice.htm


SPECIFICATIONS (T_J = 25°C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ[a]	Max	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = –250 μA	–1.0			V
Gate-Body Leakage	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = –24 V, V_{GS} = 0 V			–1	μA
		V_{DS} = –15 V, V_{GS} = 0 V, T_J = 70°C			–5	
On-State Drain Current[b]	$I_{D(on)}$	V_{DS} ≤ –10 V, V_{GS} = –10 V	–20			A
		V_{DS} ≤ –5 V, V_{GS} = –4.5 V	–5			
Drain-Source On-State Resistance[b]	$r_{DS(on)}$	V_{GS} = –10 V, I_D = –4.6 A		0.037	0.055	Ω
		V_{GS} = –6 V, I_D = –4.1 A		0.047	0.07	
		V_{GS} = –4.5 V, I_D = –2.0 A		0.060	0.105	
Forward Transconductance[b]	g_{fs}	V_{DS} = –15 V, I_D = –4.6 A		9.0		S
Diode Forward Voltage[b]	V_{SD}	I_S = –2.6 A, V_{GS} = 0 V		–0.88	–1.2	V
Dynamic[a]						
Total Gate Charge	Q_g	V_{DS} = –15 V, V_{GS} = –10 V, I_D = –4.6 A		27	40	nC
Gate-Source Charge	Q_{gs}			4		
Gate-Drain Charge	Q_{gd}			6.3		
Turn-On Delay Time	$t_{d(on)}$	V_{DD} = –15 V, R_L = 15 Ω I_D ≅ –1 A, V_{GEN} = –10 V, R_G = 6 Ω		14	30	ns
Rise Time	t_r			13	60	
Turn-Off Delay Time	$t_{d(off)}$			58	120	
Fall Time	t_f			21	100	
Source-Drain Reverse Recovery Time	t_{rr}	I_F = 2.6 A, di/dt = 100 A/μs		65	100	


Notes
a. Guaranteed by design, not subject to production testing.
b. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Output Characteristics

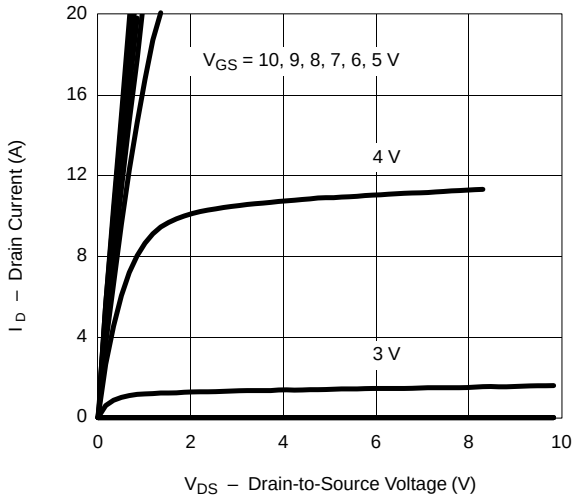


Transfer Characteristics

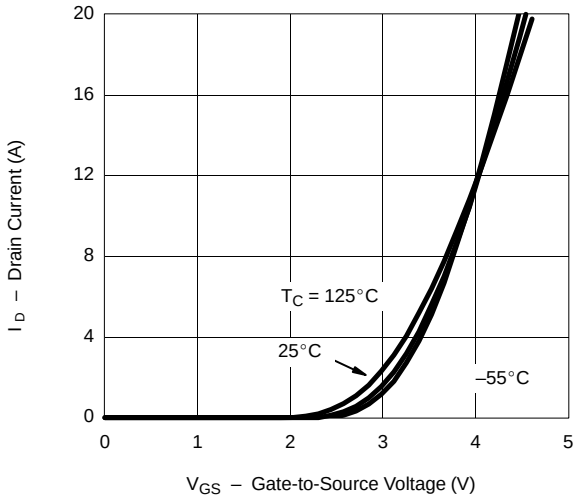


On-Resistance vs. Drain Current

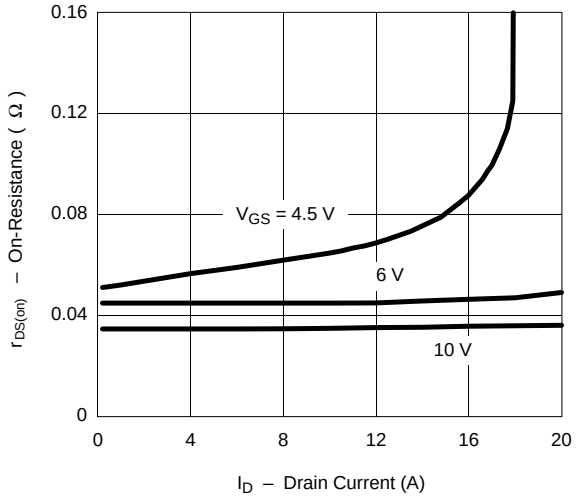


Capacitance

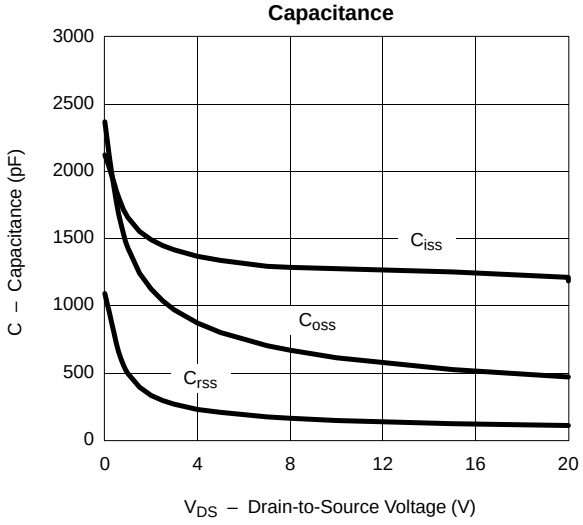

Gate Charge

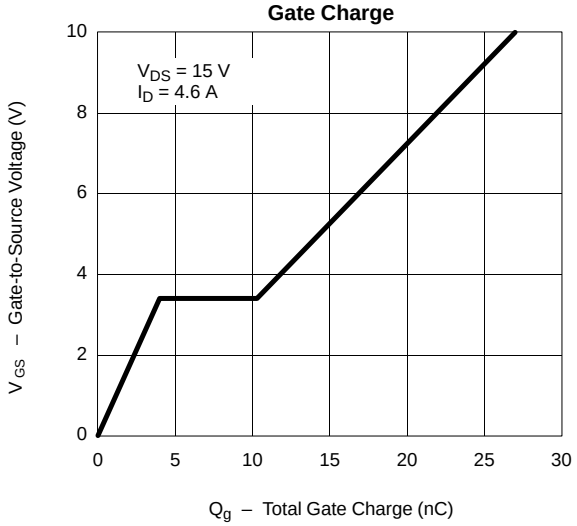


On-Resistance vs. Junction Temperature

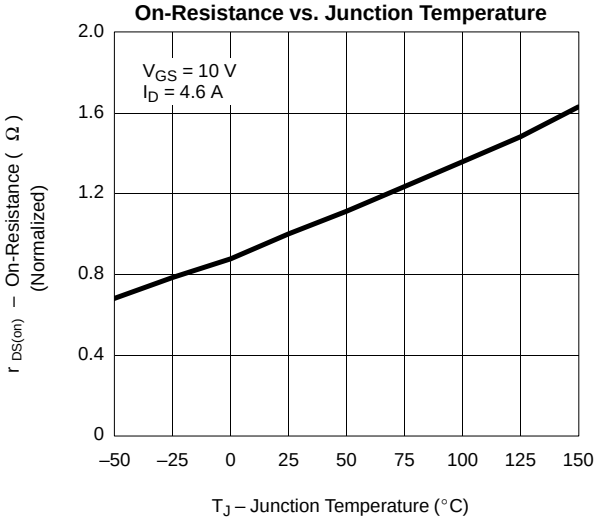


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Source-Drain Diode Forward Voltage

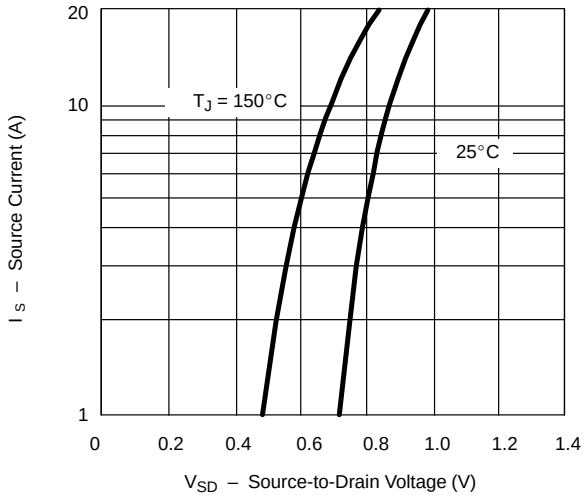


On-Resistance vs. Gate-to-Source Voltage

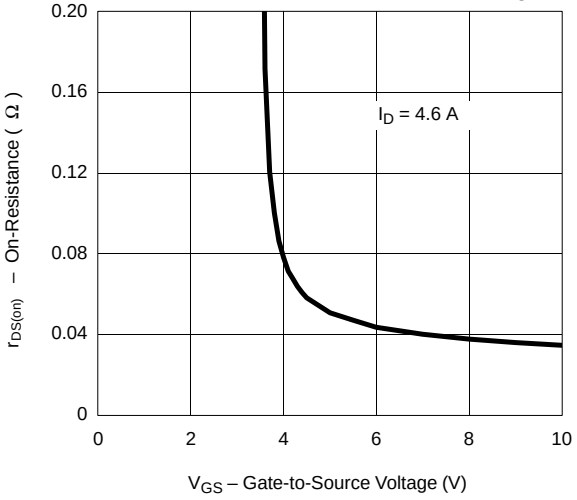


Threshold Voltage

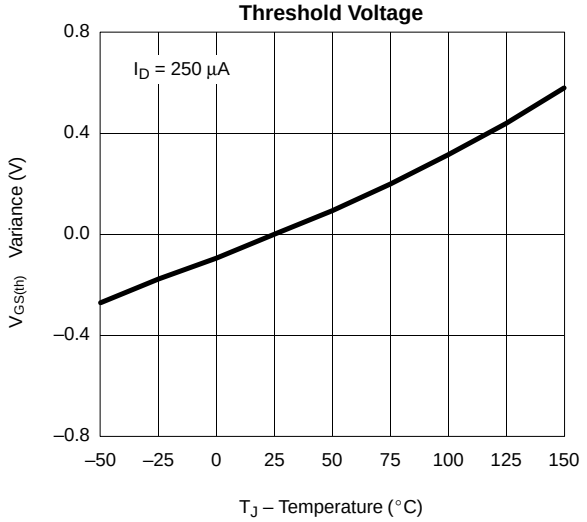

Single Pulse Power

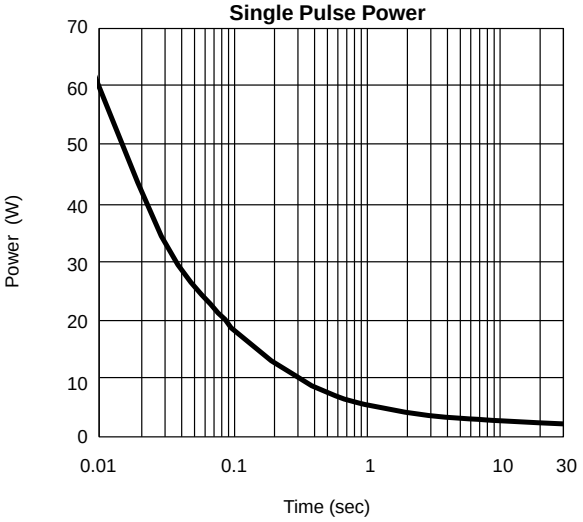

Normalized Thermal Transient Impedance, Junction-to-Ambient

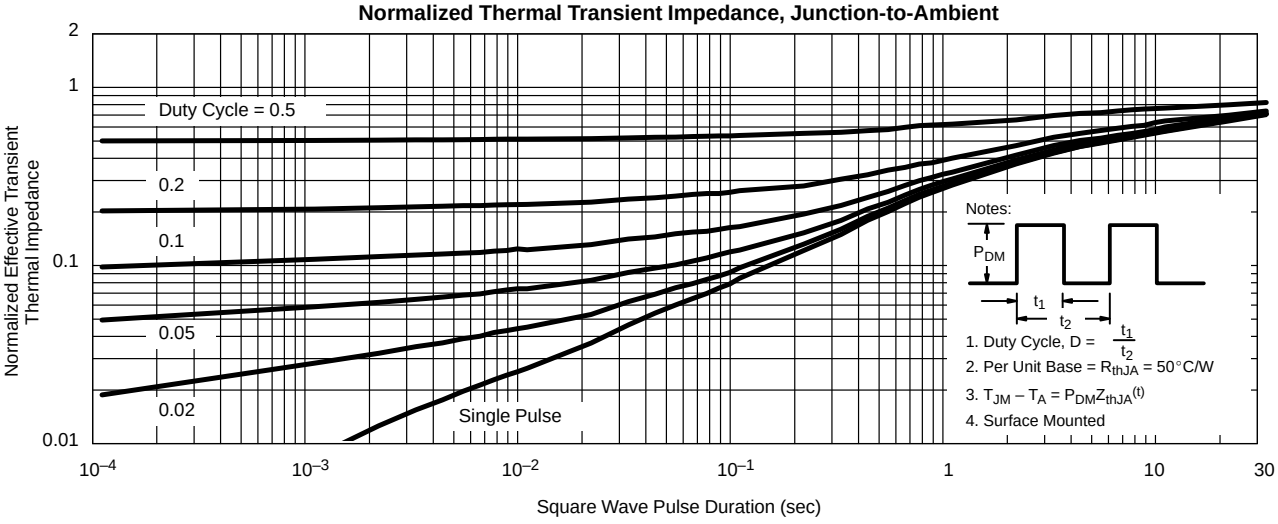

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.