

Subminiature, Leaded Solid Tantalum Capacitors Polar or Non-polar



FEATURES

- Subminiature package size and light weight
- Rectangular case with axial or radial leads
- 2 to 50 VDC
- 0.1 μ F to 470 μ F
- Operating temperature range : - 55°C to + 125°C
- High stability and reliability
- Tested in accordance with MIL-PRF-49137
- Unique and comprehensive custom design capability

ELECTRICAL CHARACTERISTICS

Operating temperature range: - 55°C to + 125°C

Capacitance: Measured at 120 Hz and 25°C with a maximum of 2.2 VDC bias and 1.0 volt rms signal.

Capacitance Tolerance: Standard tolerance is $\pm 20\%$ for ratings 0.1 μ F and above, and + 40, - 20% for ratings below 0.1 μ F. Special tolerances are also available.

Dissipation Factor: When measured simultaneously with capacitance, DF shall not exceed the value shown in the ratings tables.

DC Leakage Current (DCL Max):

When measured with DC voltage applied through a 1,000 Ω resistor for 5 minutes, DC leakage (μ A) shall not exceed:

At @ 25°C: Leakage current shall not exceed the values listed in the Standard Ratings Tables

At @ 85°C: Leakage current shall not exceed 10 times the values listed in the Standard Ratings Tables

At @ 125°C and 66% of rated voltage: Leakage current shall not exceed 15 times the values listed in the Standard Ratings Tables.

Operating Voltage: Full working voltage up to 85°C. From 85°C to 125°C working voltage derates linearly to 66% of the 85°C working voltage.

APPLICATIONS

- Hearing aids
- Portable communications
- Space/avionics
- Laptop computers.

MECHANICAL SPECIFICATIONS

Solder coated nickel leads (type N32 per MIL-STD-1276) are standard on all case sizes.

Leads are weldable and/or solderable.

Special leads are available on request (e.g. bare nickle, gold plated nickle or ribbon leads).

Lead length is 1 1/2" [38.1 mm] minimum on nonpolar parts.

On polar parts the negative lead is 1-1/4" [31.8mm] minimum and the positive lead is 1-1/2" [38.1mm] minimum.

ORDERING INFORMATION

TC MODEL	1.0 CAPACITANCE IN μ F	35 DC VOLTAGE RATING AT + 85°C	C7 CASE CODE	A* LEAD CONFIGURATION	M CAPACITANCE TOLERANCE
			C = Polar N = Nonpolar	A = Axial R = Radial	E = +40, -20% M = $\pm 20\%$ K = $\pm 10\%$ J = $\pm 5\%$

Example of Part Number Code: TC1.0-35C7AM

* To complete part number in rating tables, add A or R.
Change suffix if special capacitance tolerance is required.

DIMENSIONS in inches [millimeters]							
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>POLAR STYLE</p> </div> <div style="width: 45%;"> <p>RADIAL</p> </div> </div> <p style="text-align: center;">The 3rd dot is on the end of the CX size</p>							
CASE CODE	L MAX	W MAX	T MAX	E	E TOL ±	d	
CX	0.075 [1.91]	0.050 [1.27]	0.040 [1.02]	0.030 [0.76]	0.015 [0.38]	0.007 [0.18]	
C0	0.100 [2.54]	0.050 [1.27]	0.040 [1.02]	0.030 [0.76]	0.015 [0.38]	0.007 [0.18]	
C1	0.125 [3.18]	0.070 [1.78]	0.040 [1.02]	0.050 [1.27]	0.015 [0.38]	0.010 [0.25]	
C2	0.165 [4.19]	0.120 [3.05]	0.070 [1.78]	0.100 [2.54]	0.020 [0.51]	0.010 [0.25]	
C3	0.225 [5.72]	0.185 [4.70]	0.075 [1.91]	0.150 [3.81]	0.020 [0.51]	0.010 [0.25]	
C4	0.290 [7.37]	0.220 [5.59]	0.110 [2.79]	0.180 [4.57]	0.25 [6.4]	0.016 [0.41]	
C5	0.310 [7.87]	0.230 [5.84]	0.130 [3.30]	0.200 [5.08]	0.025 [0.64]	0.016 [0.41]	
C6	0.475 [12.07]	0.375 [9.53]	0.150 [3.81]	0.300 [7.62]	0.025 [0.64]	0.016 [0.41]	
<p>NON POLAR STYLE</p>							
CASE LA	LR MAX	W MAX	T MAX	E MAX	E TOL ±	d	CODE
N1	0.220 [5.59]	0.180 [4.57]	0.125 [3.18]	0.125 [3.18]	0.100 [2.54]	0.020 [0.51]	0.010 [0.25]
N2	0.280 [7.11]	0.240 [6.10]	0.140 [3.56]	0.180 [4.57]	0.100 [2.54]	0.025 [0.64]	0.010 [0.25]
N3	0.370 [9.40]	0.315 [8.00]	0.180 [4.57]	0.220 [5.59]	0.150 [3.81]	0.025 [0.64]	0.016 [0.41]
N4	0.390 [9.91]	0.335 [8.51]	0.230 [5.84]	0.230 [5.84]	0.180 [4.57]	0.025 [0.64]	0.016 [0.41]



STANDARD RATINGS - POLAR CAPACITORS

CAPACITANCE (μ F)	MAX DF (%)	MAX. DCL @ + 25°C (μ A)	CASE CODE	PART NUMBER
2 WVDC @ + 85°C				
0.47	10	0.5	C0	TC.47-2C0*M
0.68	10	0.5	C0	TC.68-2C0*M
1.0	10	0.5	C0	TC1.0-2C0*M
2.2	10	0.5	C1	TC2.2-2C1*M
10	10	0.5	C2	TC10-2C2*M
33	10	1.0	C3	TC33-2C3*M
100	15	2.0	C4	TC100-2C4*M
150	15	3.0	C5	TC150-2C5*M
470	20	9.0	C6	TC470-2C6*M
3 WVDC @ + 85°C				
1.5	10	0.5	C1	TC1.5-3C1*M
6.8	10	0.5	C2	TC6.8-3C2*M
22	10	1.0	C3	TC22-3C3*M
68	10	2.0	C4	TC68-3C4*M
100	10	3.0	C5	TC100-3C5*M
330	20	9.0	C6	TC330-3C6*M
4 WVDC @ + 85°C				
0.33	10	0.5	C0	TC.33-4C0*M
1.0	8	0.5	C1	TC1.0-4C1*M
4.7	8	0.5	C2	TC4.7-4C2*M
15	8	1.0	C3	TC15-4C3*M
47	8	2.0	C4	TC47-4C4*M
68	8	3.0	C5	TC68-4C5*M
220	15	9.0	C6	TC220-4C6*M
6 WVDC @ + 85°C				
0.22	10	0.5	C0	TC.22-6C0*M
0.68	6	0.5	C1	TC.68-6C1*M
3.3	6	0.5	C2	TC3.3-6C2*M
10	6	1.0	C3	TC10-6C3*M
33	6	2.0	C4	TC33-6C4*M
47	6	3.0	C5	TC47-6C5*M
150	10	9.0	C6	TC150-6C6*M
10 WVDC @ + 85°C				
0.0010	10	0.5	C0	TC.0010-10C0*E
0.0010	10	0.5	C1	TC.0010-10C1*E
0.0015	10	0.5	C0	TC.0015-10C0*E
0.0015	10	0.5	C1	TC.0015-10C1*E
0.0022	10	0.5	C0	TC.0022-10C0*E
0.0022	10	0.5	C1	TC.0022-10C1*E
0.0033	10	0.5	C0	TC.0033-10C0*E
0.0033	10	0.5	C1	TC.0033-10C1*E
0.0047	10	0.5	C0	TC.0047-10C0*E
0.0047	10	0.5	C1	TC.0047-10C1E
0.15	10	0.5	C0	TC.15-10C0*M
0.47	6	0.5	C1	TC.47-10C1*M
2.2	6	0.5	C2	TC2.2-10C2*M
6.8	6	1.0	C3	TC6.8-10C3*M
22	6	2.0	C4	TC22-10C4*M
33	6	3.0	C5	TC33-10C5*M
100	8	9.0	C6	TC100-10C6*M

*Add A for axial, R for radial



Subminiature, Leaded Solid Tantalum Capacitors
Polar or Non-polar

Vishay Sprague

STANDARD RATINGS - POLAR CAPACITORS				
CAPACITANCE (μF)	MAX DF (%)	MAX. DCL @ + 25°C (μA)	CASE CODE	PART NUMBER
15 WVDC @ + 85°C				
0.10	10	0.5	C0	TC.10-15C0*M
0.33	6	0.5	C1	TC.33-15C1*M
1.5	6	0.5	C2	TC1.5-15C2*M
15	6	2.0	C4	TC15-15C4*M
22	6	3.0	C5	TC22-15C5*M
68	8	9.0	C6	TC68-15C6*M
20 WVDC @ + 85°C				
0.0068**	10	0.5	C0	TC.0068-20C0*E
0.010**	10	0.5	C0	TC.010-20C0*E
0.010**	6	0.5	C1	TC.010-20C1*E
0.015**	10	0.5	C0	TC.015-20C0*E
0.015**	6	0.5	C1	TC.015-20C1*E
0.022**	10	0.5	C0	TC.022-20C0*E
0.022**	6	0.5	C1	TC.022-20C1*E
0.033**	10	0.5	C0	TC.033-20C0*E
0.033**	6	0.5	C1	TC.033-20C1*E
0.047**	10	0.5	C0	TC.047-20C0*E
0.047**	6	0.5	C1	TC.047-20C1*E
0.068**	10	0.5	C0	TC.068-20C0*E
0.068**	6	0.5	C1	TC.068-20C1*E
0.10	6	0.5	C1	TC.10-20C1*M
0.15	6	0.5	C1	TC.15-20C1*M
0.22	6	0.5	C1	TC.22-20C1*M
1.0	6	0.5	C2	TC1.0-20C2*M
3.3	6	1.0	C3	TC3.3-20C3*M
4.7	6	1.0	C3	TC4.7-20C3*M
10	6	2.0	C4	TC10-20C4*M
15	6	3.0	C5	TC15-20C5*M
47	8	9.0	C6	TC47-20C6*M
25 WVDC @ + 85°C				
0.68	6	0.5	C2	TC.68-25C2*M
2.2	6	1.0	C3	TC2.2-25C3*M
6.8	6	2.0	C4	TC6.8-25C4*M
10	6	3.0	C5	TC10-25C5*M
33	6	9.0	C6	TC33-25C6*M
35 WVDC @ + 85°C				
0.22	6	0.5	C2	TC.22-35C2*M
0.33	6	0.5	C2	TC.33-35C2*M
0.47	6	0.5	C2	TC.47-35C2*M
0.68	6	1.0	C3	TC.68-35C3*M

*Add A for axial, R for radial

** Ratings will be discontinued 60 days after revision date



STANDARD RATINGS - POLAR CAPACITORS				
CAPACITANCE (μ F)	MAX DF (%)	MAX. DCL @ + 25°C (μ A)	CASE CODE	PART NUMBER
35 WVDC @ + 85°C				
1.0	6	1.0	C3	TC1.0-35C3*M
1.5	6	1.0	C3	TC1.5-35C3*M
2.2	6	2.0	C4	TC2.2-35C4*M
3.3	6	2.0	C4	TC3.3-35C4*M
4.7	6	2.0	C4	TC4.7-35C4*M
6.8	6	3.0	C5	TC6.8-35C5*M
10	6	9.0	C6	TC10-35C6*M
15	6	9.0	C6	TC15-35C6*M
22	6	9.0	C6	TC22.35C6*M
50 WVDC @ + 85°C				
0.15	6	0.5	C2	TC.15-50C2*M
4.7	6	3.0	C5	TC4.7-50C5*M
6.8	6	9.0	C6	TC6.8-50C6*M

*Add A for axial, R for radial

STANDARD RATINGS - NON-POLAR CAPACITORS				
CAPACITANCE (μ F)	MAX DF (%)	MAX. DCL @ + 25°C (μ F)	CASE CODE	PART NUMBER
2 WVDC @ + 85°C				
4.7	10	0.5	N1	TC4.7-2N1*M
15	10	1.0	N2	TC15-2N2*M
47	15	2.0	N3	TC47-2N3*M
68	15	3.0	N4	TC68-2N4*M
3 WVDC @ + 85°C				
3.3	10	0.5	N1	TC3.3-3N1*M
10	10	1.0	N2	TC10-3N2*M
33	10	2.0	N3	TC33-3N3*M
47	10	3.0	N4	TC47-3N4*M
4 WVDC @ + 85°C				
2.2	8	0.5	N1	TC2.2-4N1*M
6.8	8	1.0	N2	TC6.8-4N2*M
22	8	2.0	N3	TC22-4N3*M
33	8	3.0	N4	TC33-4N4*M
6 WVDC @ + 85°C				
1.5	6	0.5	N1	TC1.5-6N1*M
4.7	6	1.0	N2	TC4.7-6N2*M
15	6	2.0	N3	TC15-6N3*M
22	6	3.0	N4	TC22-6N4*M
10 WVDC @ + 85°C				
1.0	6	0.5	N1	TC1.0-10N1*M
3.3	6	1.0	N2	TC3.3-10N2*M
10	6	2.0	N3	TC10-10N3*M
15	6	3.0	N4	TC15-10N4*M
15 WVDC @ + 85°C				
0.68	6	0.5	N1	TC.68-15N1*M
6.8	6	2.0	N3	TC6.8-15N3*M
10	6	3.0	N4	TC10-15N4*M

*Add A for axial, R for radial



STANDARD RATINGS - NON-POLAR CAPACITORS				
CAPACITANCE (μ F)	MAX DF (%)	MAX. DCL @ + 25°C (μ A)	CASE CODE	PART NUMBER
20 WVDC @ + 85°C				
0.47	6	0.5	N1	TC.47-20N1*M
1.5	6	1.0	N2	TC1.5-20N2*M
2.2	6	1.0	N2	TC2.2-20N2*M
4.7	6	2.0	N3	TC4.7-20N3*M
6.8	6	3.0	N4	TC6.8-20N4*M
25 WVDC @ + 85°C				
0.33	6	0.5	N1	TC.33-25N1*M
1.0	6	1.0	N2	TC1.0-25N2*M
3.3	6	2.0	N3	TC3.3-25N3*M
4.7	6	3.0	N4	TC4.7-25N4*M
35 WVDC @ + 85°C				
0.10	6	0.5	N1	TC.10-35N1*M
0.15	6	0.5	N1	TC.15-35N1*M
0.22	6	0.5	N1	TC.22-35N1*M
0.33	6	1.0	N2	TC.33-35N2*M
0.47	6	1.0	N2	TC.47-35N2*M
0.68	6	1.0	N2	TC.68-35N2*M
1.0	6	2.0	N3	TC1.0-35N3*M
1.5	6	2.0	N3	TC1.5-35N3*M
2.2	6	2.0	N3	TC2.2-35N3*M
3.3	6	3.0	N4	TC3.3-35N4*M
50 WVDC @ + 85°C				
2.2	6	3.0	N4	TC2.2-50N4*M

*Add A for axial, R for radial

MARKING			
TC Capacitors case sizes C3 - C6 and N2 - N4 are print marked:		All other case sizes are have color dot marking:	
- Capacitance is in picofarads		Capacitance	Color Digit
- 1st and 2nd digits are significant figures		In picofarads, indicated by 3 dots.	Black 0
- 3rd digit indicates the number of zeros.		1st and 2nd dot give the significant digits.	Brown 1
		3rd dot indicates the number of zeros.	Red 2
		Color dot location is shown on the dimensional sketches.	Orange 3
		Black dot is omitted on black sleeve.	Yellow 4
			Green 5
			Blue 6
			Violet 7
			Grey 8
			White 9
Capacitance Tolerance	Color	Tolerance	
Is indicated by a dot on the side of the case.	Gold	\pm 5%	
Black dot is omitted.	Silver	\pm 10%	
	None	\pm 20%	
	None	+ 40%/- 20%	
The positive lead is indicated by a color dot of red epoxy on the unit.		e.g. Yellow-Violet-Green = 4,700,000 pf = 4.7 μF	



PERFORMANCE AND RELIABILITY

The capacitors are tested in accordance with MIL-PRF-49137, with specific requirements as follows:

Temperature Stability: When tested per MIL-PRF-49137/6, capacitance shall be within +/-15% at -55°C and 85°C, and +/-10% at 25°C after exposure to temperature extremes. DF shall be within 200% of initial limit at -55°C, 150% of initial limit at 85°C, and meet the initial at 25°C. DCL shall be within 10 x initial limit at 85°C, and meet the initial limit at 25°C.

Moisture Resistance: (per Method 106 of MIL-STD-202) After 10 cycles of 24 hours at 25°C to 65°C and 80-98% RH; capacitance shall be within +/-15% of initial value, DF within 1.5 x initial limit and leakage within 3 x initial limit.

Life: (per Method 108 of MIL-STD-202) after 1,000 hours at 85°C and rated voltage; capacitance shall be within +/-10% of initial limit, DF within initial limits, and leakage within 200% of initial limit.


Surge Voltage: (per MIL-PRF-49317) After 1,000 cycles at 85°C and 1.3 x WVDC; capacitance shall be within +/-10% of initial limit, DF and leakage within initial limits.

Resistance to Soldering Heat: (per Method 210 of MIL-STD-202, Condition B) After immersion in 260°C molten solder to within a 1/4" of the body of the unit, there shall be no evidence of mechanical or electrical degradation.


Solderability: (per Method 208 of MIL-STD-202) After dipping leads in 235°C molten solder to within .125" of the body of the unit, the solder shall cover 95% of the lead surface.

Terminal Strength: (per Method 211 of MIL-STD-202) After the following test there shall be no loosening of the terminals or permanent damage to the terminals. Test Condition A: (Pull Test) 0.010" leads withstand 1 pound, 0.016" leads 2 pounds and 0.007" leads 1/2 pound. Test Condition C: (Bend Test) All leads shall withstand 3-90° bends with a 1/2 pound applied force.


IMPEDANCE vs. FREQUENCY

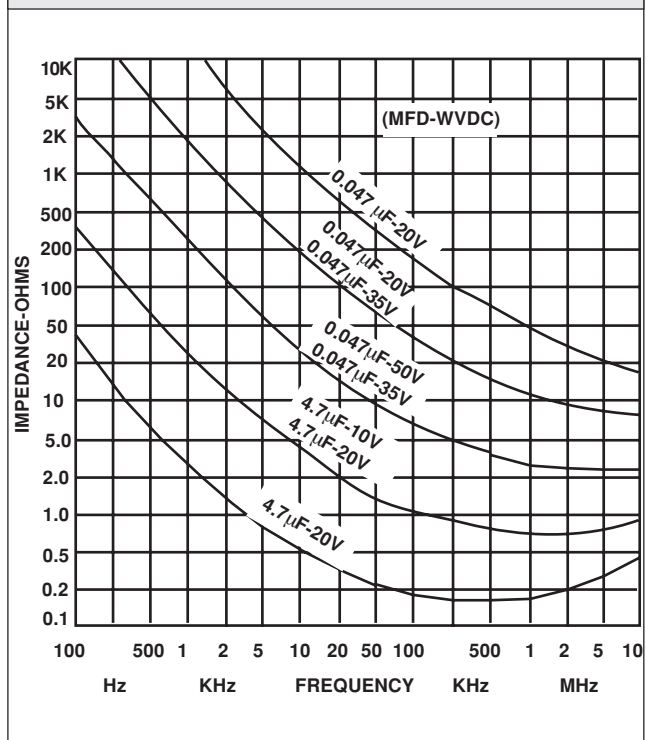

CAPACITANCE vs. TEMPERATURE

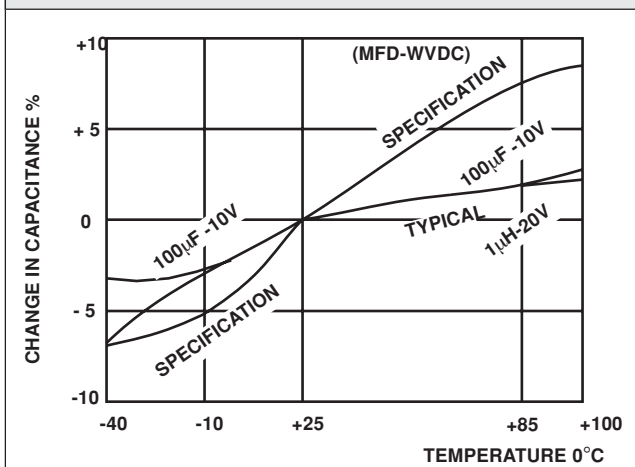

LEAKAGE CURRENT - TEMPERATURE

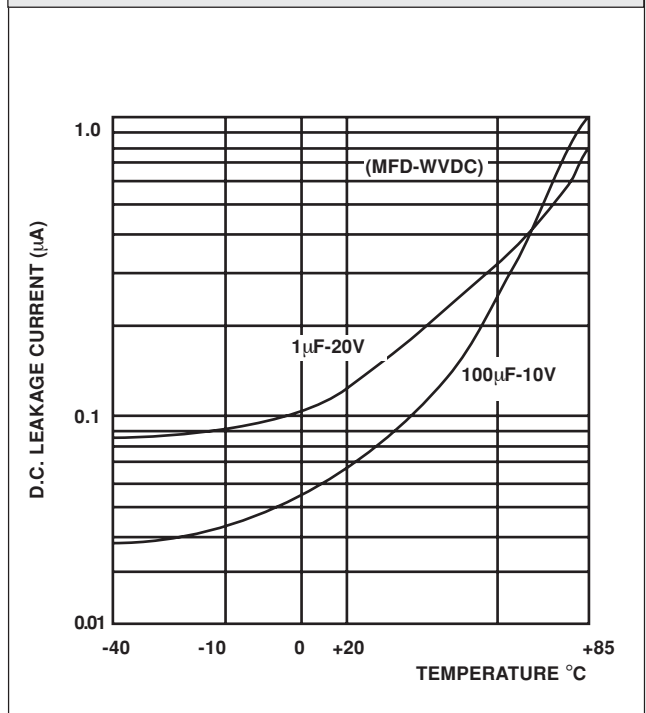



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.