



ALUMINUM ELECTROLYTIC CAPACITORS

UA series 6mmL Chip Type, Long Life Assurance



- Chip type with load life of 3000 to 5000 hours at +105°C.
- Designed for surface mounting on high density PC board.
- Adapted to the RoHS directive (2002/95/EC).

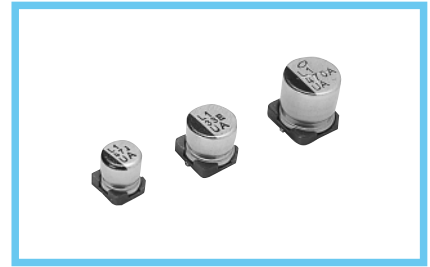


Specifications


Item	Performance Characteristics						
Category Temperature Range	-55 to +105°C						
Rated Voltage Range	6.3 to 50V						
Rated Capacitance Range	0.1 to 1000μF						
Capacitance Tolerance	±20% at 120Hz, 20°C						
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 (μA) , whichever is greater.						
tan δ	Measurement frequency : 120Hz, Temperature : 20°C						
	Rated voltage (V)	6.3	10	16	25	35	50
Stability at Low Temperature	Measurement frequency : 120Hz						
	Rated voltage (V)	6.3	10	16	25	35	50
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	4	3	2	2	2
Endurance	After 3000 hours' (5000 hours for φ8, φ10) application of rated voltage at 105°C , capacitors meet the characteristic requirements listed at right.						
	Capacitance change	Within ±30% of initial value					
	tan δ	300% or less of initial specified value					
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.						
	Capacitance change	Within ±10% of initial value					
	tan δ	Initial specified value or less					
Resistance to soldering heat	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the characteristic requirements listed at right.						
	Capacitance change	Initial specified value or less					
	Leakage current	Initial specified value or less					
Marking	Black print on the case top.						

Chip Type


(φ4 to 6.3)

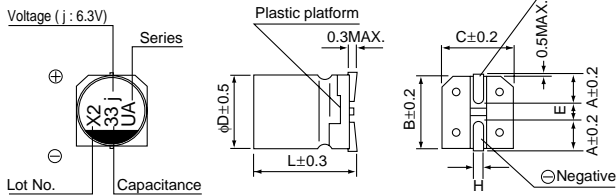

(φ8×10, φ10×10)

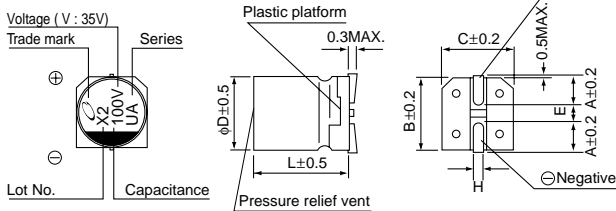

Type numbering system (Example : 16V 10μF)

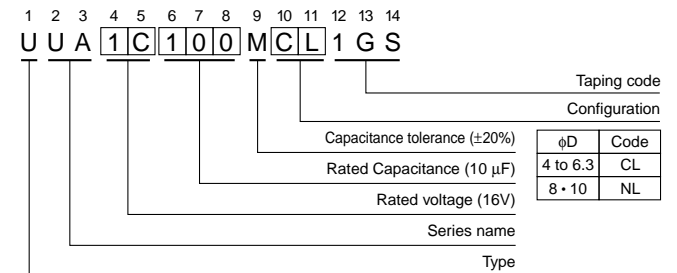

Voltage

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

φD × L	(mm)					
	4 × 5.8	5 × 5.8	6.3 × 5.8	6.3 × 7.7	8 × 10	10 × 10
A	1.8	2.1	2.4	2.4	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	10.3
E	1.0	1.3	2.2	2.2	3.1	4.5
L	5.8	5.8	5.8	7.7	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

■Dimensions

Cap.(μ F)	Code	6.3		10		16		25		35		50	
		0J		1A		1C		1E		1V		1H	
0.1	0R1											4×5.8	1
0.22	R22											4×5.8	2.6
0.33	R33											4×5.8	3.2
0.47	R47											4×5.8	5
1	010											4×5.8	8
2.2	2R2											4×5.8	12
3.3	3R3											4×5.8	17
4.7	4R7									4×5.8	16	5×5.8	22
10	100					4×5.8	18	5×5.8	27	5×5.8	27	6.3×5.8	32
22	220	4×5.8	22	5×5.8	30	5×5.8	30	6.3×5.8	44	6.3×5.8	44	6.3×7.7	58
33	330	5×5.8	35	5×5.8	35	6.3×5.8	48	6.3×5.8	50	6.3×7.7	57	8×10	140
47	470	5×5.8	38	6.3×5.8	50	6.3×5.8	50	6.3×7.7	63	8×10	92	8×10	170
100	101	6.3×5.8	69	6.3×7.7	81	6.3×7.7	81	8×10	116	10×10	151	10×10	310
220	221	6.3×7.7	120	8×10	141	10×10	216	10×10	320	10×10	375		
330	331	8×10	290	10×10	290	10×10	290	10×10	450				
470	471	10×10	320	10×10	320	10×10	320						
1000	102	10×10	410									Case size ϕ D×L(mm)	Rated ripple

Rated Ripple (mArms) at 105°C 120Hz

●Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.