


Low Value (0.03 Ω to 10 Ω) Thin Film Chip Resistors



Actual Size
0805

With extremely low resistances and high power capabilities, VISHAY's proven and unique ultra-low value resistors can be used in your hybrid or surface mount applications. These resistors are available with solderable or weldable terminations.

SURFACE MOUNT CHIPS

FEATURES

- Lead (Pb)-free or Sn/Pb terminations available
- Homogeneous **nickel alloy film**
- No inductance for high frequency application
- Alumina substrates for high power handling capability (2 watt max power rating)
- Pre-soldered or gold terminations




RoHS*
COMPLIANT

TYPICAL PERFORMANCE

	ABS
TCR	300
TOL	1.0

CONSTRUCTION

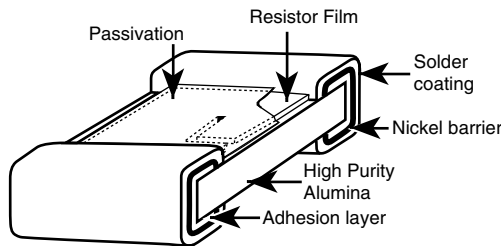

VALUE AND MINIMUM TOLERANCE

VALUE (Ω)	MINIMUM TOLERANCE
0.1	± 2.0 %
0.25	± 1.0 %
0.5	± 1.0 %
1.0	± 1.0 %
2.0	± 1.0 %
10.0	± 1.0 %
< 0.1	20 %


STANDARD ELECTRICAL SPECIFICATIONS

TEST	SPECIFICATIONS	CONDITION
Case Sizes	0505, 0705, 0805, 1005, 1020, 1206, 1505, 2010, 2515	
Resistance Range	0.03 Ω to 10.0 Ω	
Absolute TCR	± 300 ppm/°C	- 55 °C to + 125 °C
Noise	< - 30 dB Typical	
Power Rating	up to 2.0 Watt	at + 70 °C

(Resistor values beyond ranges shall be reviewed by the factory)


CASE SIZE	0505	0705	0805	1005	1020	1206	1505	2010	2512
Power Rating - mW	125	200	200	250	1000	330	500	1000	2000
Min. Resistance - Ohms	0.05	0.10	0.10	0.15	0.03	0.10	0.25	0.17	0.18
Max. Resistance - Ohms	5.0	6.0	6.0	10.0	3.0	10.0	10.0	10.0	10.0

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches and millimeters


CASE SIZE	SIZE - Inches and mm							
	L		W		T		D	
	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
	+ 0.010/- 0.005	+ 0.25/- 0.13	± 0.005	± 0.13	MAX.		+ 0.010/- 0.005	+ 0.25/- 0.13
0505	0.050	1.27	0.050	1.27	0.020	0.51	0.016	0.41
0805*, 0705*	0.075	1.91	0.050	1.27	0.020	0.51	0.021	0.53
1005	0.100	2.54	0.050	1.27	0.030	0.76	0.021	0.53
1020	0.100	2.54	0.200	5.08	0.030	0.76	0.015	0.38
1206	0.126	3.20	0.063	1.60	0.030	0.76	0.020	0.51
1505	0.150	3.81	0.050	1.27	0.030	0.76	0.021	0.53
2010	0.200	5.08	0.100	2.54	0.030	0.76	0.019	0.48
2512	0.250	6.35	0.125	3.18	0.030	0.76	0.019	0.48

MECHANICAL SPECIFICATIONS	
Resistive Element	Nickel Alloy
Substrate Material	Alumina
Terminals	Pre-soldered or gold
Lead (Pb)-free Option	96.5 % Sn, 3.0 % Ag, 0.5 % Cu
Lead (Pb)-free Finish	Hot Solder Dip

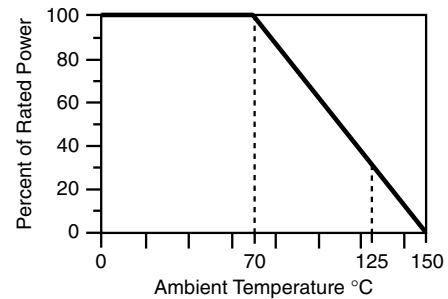DERATING CURVE


ENVIRONMENTAL TEST	
TEST	1 Ω ΔR ± %
Thermal Shock	0.06
Short Term Overload	0.06
Low Temperature Operation	0.03
Resistance to Solder Heat	0.05
Moisture Resistance	0.35
High Temp. Exposure	0.35
Load Life (2000 hrs. at + 70 °C)	0.40
TCR	± 235 ppm/°C

GLOBAL PART NUMBER INFORMATION														
New Global Part Numbering: L-1206M1R00GBT1 (preferred part number format)														
L	-	1	2	0	6	M	1	R	0	0	G	B	T	1
GLOBAL MODEL	CASE SIZE	TCR CHARACTERISTICS		OHMIC VALUE	TOLERANCE	TERMINATION			PACKAGING					
L = Low value wraparound chip resistor	0505 0805 1005 1020 1206 1505 2010 2512	M = 300 ppm/°C N = 350 ppm/°C O = 400 ppm/°C P = 500 ppm/°C		First 3 digits are significant figures and the last digit specifies the number of zeroes to follow. "R" designates the decimal point. Example: 0R10 = 0.1 Ω 1R60 = 1.6 Ω	F = 1 % G = 2 % H = 3 % J = 5 % K = 10 % L = 20 %	B = Wraparound Sn/Pb Solder 63 % Sn/37 % Pb w/ Nickel Barrier G = Wraparound Au over Ni (Gold) Termination Epoxy Solderable RoHS compliant - e4 W = Top Side Wire Bondable Au (Gold) RoHS compliant - e4 S = Wraparound Lead (Pb)-free Solder 96.5 % Sn/3.0 % Ag/0.5 % Cu RoHS compliant - e1			BS = BULK 100 Min 1 Mult WS = WAFFLE 100 Min 1 Mult TAPE AND REEL T0 = 100 Min 100 Mult T1 = 1000 Min 1000 Mult T3 = 300 Min 300 Mult T5 = 500 Min 500 Mult TF = Full Reel TS = 100 Min 1 Mult					
Historical Part Number example: L1206M1R00HBT (will continue to be accepted)														
L	1206	M	1R00	H	B	T								
STYLE	CASE SIZE	TCR CHARACTERISTICS	OHMIC VALUE	TOLERANCE	TERMINATION	PACKAGING								



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.