


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 19
BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS
RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

REVISIONS		DATE	APPROVED
P	F	ZONE LTR	DESCRIPTION
✓	✓	L	REDRAWN & REVISED PER ECN R-1451
✓	✓	M	REV/ECN R-1946
✓	✓	N	OBSOLETE - 3 PER R-2760
✓	✓	P	REV PER ECN DF-5920
11-25-85	5/8	5/8	5/8

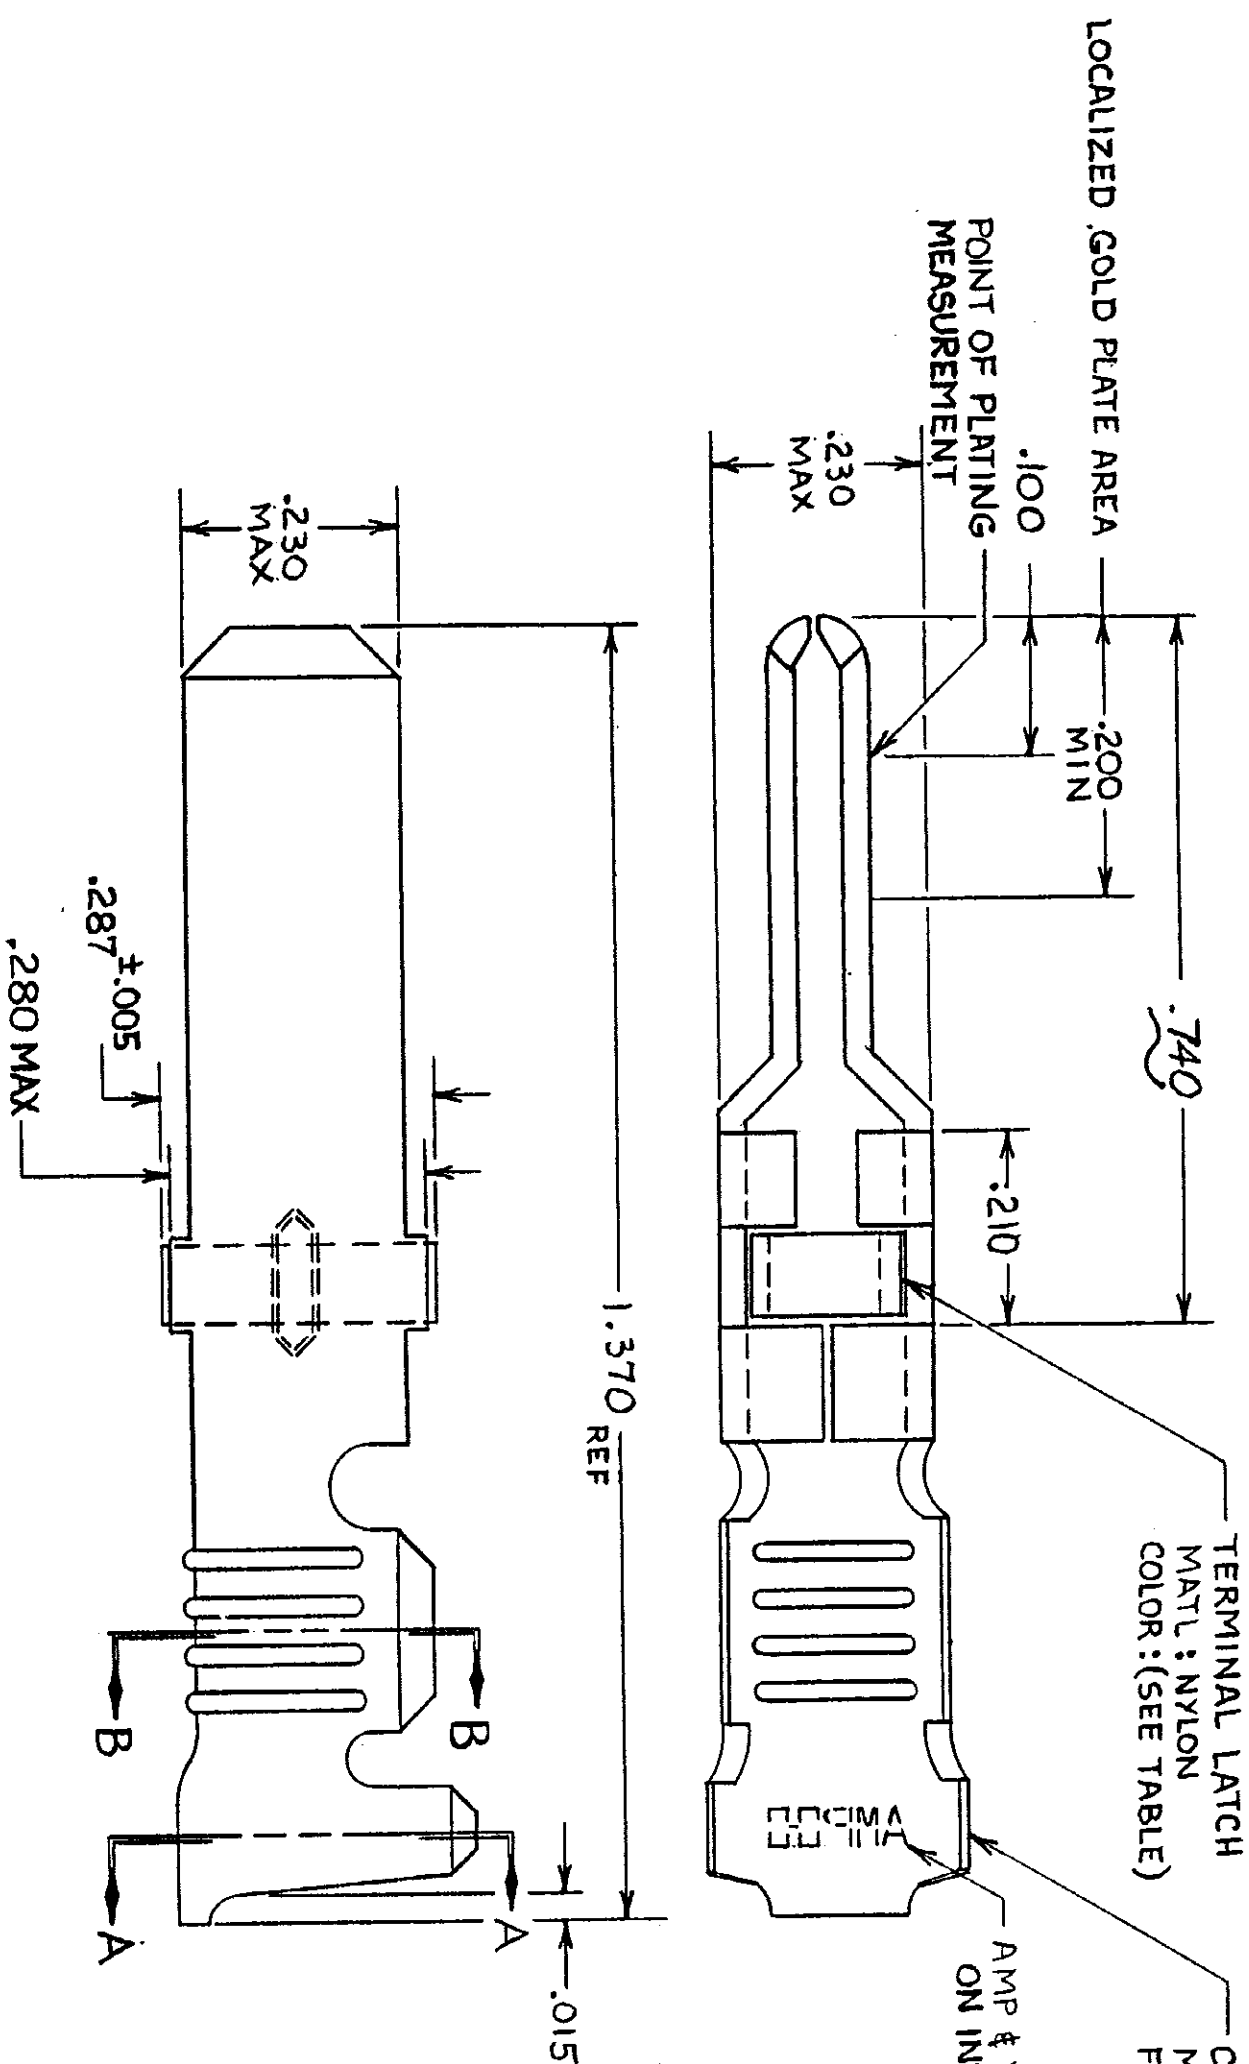

SECTION B-B

SECTION A-A

- 1. REELED FOR USE WITH STANDARD APPLICATORS.
- 2. PLATED WITH .000100 MIN SILVER PER QQ-S-365.
- 3. PLATED WITH .000015 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
- 4. PLATED WITH .000030 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
- 5. PLATED WITH .000050 MIN 93-7% TIN-LEAD ALLOY OVER .000030 MIN NICKEL PER QQ-N-290.
- 6. WIRE RANGE = 10 AWG.
- 7. INSULATION RANGE = .190 - .220 DIA.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± .010 ANGLES		CONTRACT NO.		NAME	
MATERIAL		DR. 7-27-85		AMP INCORPORATED Harrisburg, Pa. 17105	
SEE CALLOUT		CHD 10-25-85		MALE TYPE XII GROUND CONTACT LOOSE PIECE ASSY	
FINISH		APPD 10-25-85		SIZE	
SEE DASH NO		DSGN APPD		FSCM NO	
		OTHER APPD		DRAWING NO	
				00779	
				66260	
				SCALE NTS	
				SHEET	