

Headers

to ASP025

- Type 017** page 126
- Type 039** page 136
- Type 041** page 129
- Type 417** page 128

Headers

to ASP145

- Type 017** page 126
- Type 027** page 126
- Type 041** page 129
- Type 046** page 127
- Type 318** page 128
- Type 417** page 128

Accessories

to ASP025

Mounting flange
720036 page 201

ASP025

Spring clamp terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry perpendicular to plug direction

Technical Data

V / A / AWG 300 / 8 / 28 - 16

0.08 - 1 mm² 250 V / 4 kV / 10 A

Insulation co-ordination according to EN 60664-1
Clearance and creepage distances min. 3.7 mm

Insulating material class	CTI 400		
Overtoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250	500	500
Rated test voltage	2.5	4	2.5
Protection category according to IEC 529	IP20		
Min. insul. strip length	4 mm		
Pole size	2 - 24		
Color	grey		

ASP145

Spring clamp terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry perpendicular or parallel to plug direction, 3 plugging directions


Technical Data

0.2 - 1.5 mm² 250 V / 2.5 kV / 12 A

Insulation co-ordination according to EN 60664-1
Clearance and creepage distances min. 3.2 mm

Insulating material class	CTI 600		
Overtoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250	630	630
Rated test voltage	2.5	6	4
Protection category according to IEC 529	IP20		
Min. insul. strip length	7 mm		
Pole size	2 - 12		
Color	black		

Dimensions in mm 1 mm = 0.0394 in.

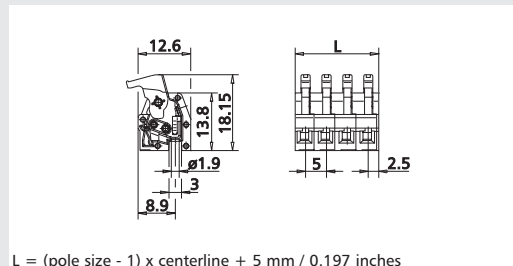

Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.


ASP025

centerline 5 mm / 0.197 inches

P/N ASP025

	02	03	04	05	06	07	08
	09	10	11	12	13	14	15
	17	18	19	20	21	22	23
	24						

Dimensions in mm 1 mm = 0.0394 in.

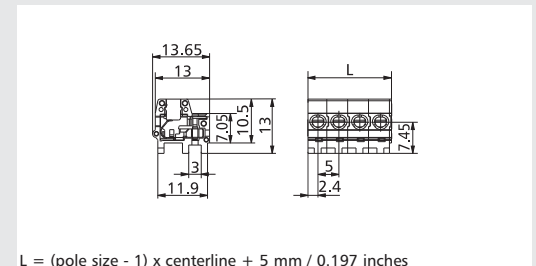

Part numbers (P/N)

(information: page 16)

Complete the part number by adding the pole size.

ASP145

centerline 5 mm / 0.197 inches

P/N ASP145

	02	03	04	05	06	07	08
	09	10	11	12			

Standard pole sizes
 Available on demand. Minimum order quantity 5000 pieces per item.

Standard pole sizes
 Available on demand. Minimum order quantity 5000 pieces per item.